

TRIO MINI LED

SG SERIES

WALL/CEILING LUMINAIRE



LEEDing the way with VR Architectural Lighting ...




TRIO MINI LED

WALL/CEILING LUMINAIRE

SG SERIES LED

9 1/2" x 6"

DIMENSIONAL DATA

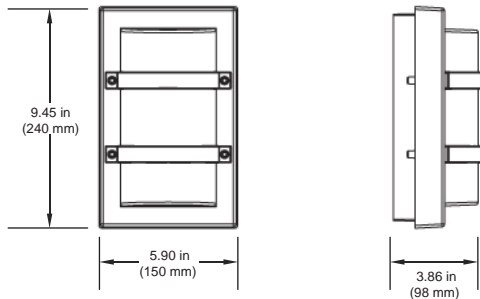

APPLICATION

- Public Areas
- Schools
- Hospitality
- Exterior Wall
- Corridors/Stairways
- Underpasses

DESCRIPTION

This upscale, smart, vandal resistant fixture is 100% marine grade cast aluminum and presents a stylish option for high abuse lighting needs where the aesthetics and design is as important its durability. The face plate is also die-cast for rugged strength. This provides a design continuity for an entire project from the functional indoor fixtures to the decorative exterior wall locations without compromising strength. The Trio is a value driven fixture that excels at New Star's affirmation of "simple solutions for complex problems."

SPECIFICATION FEATURES

HOUSING:

Marine Grade cast aluminum housing including face plate.

LENS:

UV Stabilized white opal polycarbonate.

LED:

4.8W Linear LED Module.

WARRANTY:

All SG Series Fixtures feature the New Star Promise.

GASKET:

An injection molded continuous one piece silicone rubber gasket to prevent infiltration.

FASTENERS:

Allen Head Screws (without center pin) - standard.

FINISH:

Powdercoat finish in Black, White and Graphite.

LABEL:



Notes:

Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number. The New Star Promise will repair or replace any high abuse fixture when installed according to New Star's instructions for the life of the original installation if the lens should fail due to physical abuse*.



TRIO MINI LED


WALL/CEILING LUMINAIRE

SG SERIES

LED

9 1/2" x 6"

MOUNTING DIMENSIONS

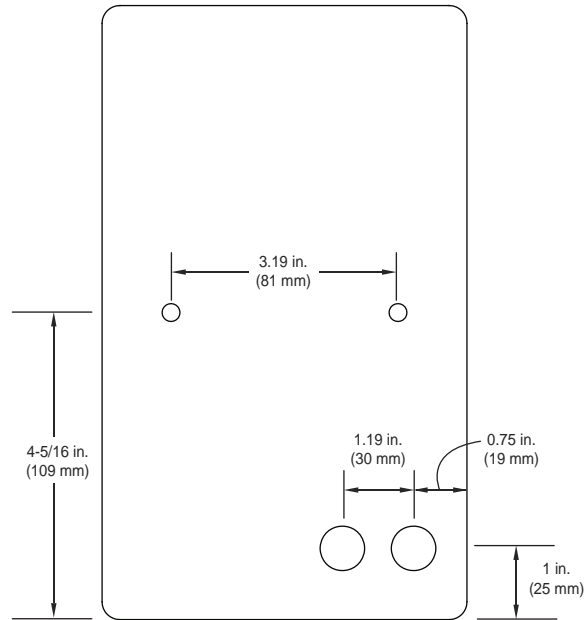

ORDERING INFORMATION

TRIO MINI WALL LUMINAIRE SG SERIES

PRODUCT FAMILY	LAMP TYPE	LED VERSION	VOLTAGE	FINISH	OPTIONS
TRIO 9 1/2" X 6"	LED LED = LED Light Strip	05 = 3 LEDs @ 4.8W	12 = 120V * For 277V Please consult factory	BK = Black WH = White GR = Graphite	THTP = Torx® Head screws (with center pin) EML = Ballast: Emergency LED (must be remote) PC = Photocell 120V PC2 = Photocell 277V FZ = Fuse

Notes:
Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number. The New Star Promise will repair or replace any high abuse fixture when installed according to New Star's instructions for the life of the original installation if the lens should fail due to physical abuse.