

VICTORY WIDE LED

VIC1W/VIC2W/VIC3W/VIC4W

SPECIFICATION FEATURES

- HOUSING:** Marine grade extruded aluminum frame with cast aluminum endcaps. Includes knockouts for surface conduit and tandem mounting.
- LENS:** Linear ribbed clear and white polycarbonate lens available in two thicknesses.
- LENS RETENTION:** Unique swing rail design for ease of lens removal for maintenance.
- LED:** Available in four color temperatures 3000°K, 3500°K, 4000°K and 5000°K. Other color temperatures available, consult factory. Standard 0-10V driver provided. Optional dimming function (DM) with 10-100% range.
- LED NIGHT LIGHT:** Integrated switch allows light selection at 100%, 70%, 40% and 10%.
- REFLECTOR:** Faceted 22Ga. specular aluminum for maximum rigidity and controlled light distribution.
- FASTENERS:** Phillips flat head screws (3 screws on each side).
- FINISH:** 5 stage wash and pre-treatment with a white polyester powder coat finish.
- GASKET:** EPDM gasketing to prevent water and dust infiltration.



APPLICATION: Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more.


MOUNTING: Surface Wall Mount Installation.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratories.



DLC Approved:
VIC4W-L4401-RC-UN-WH

ORDERING INFORMATION

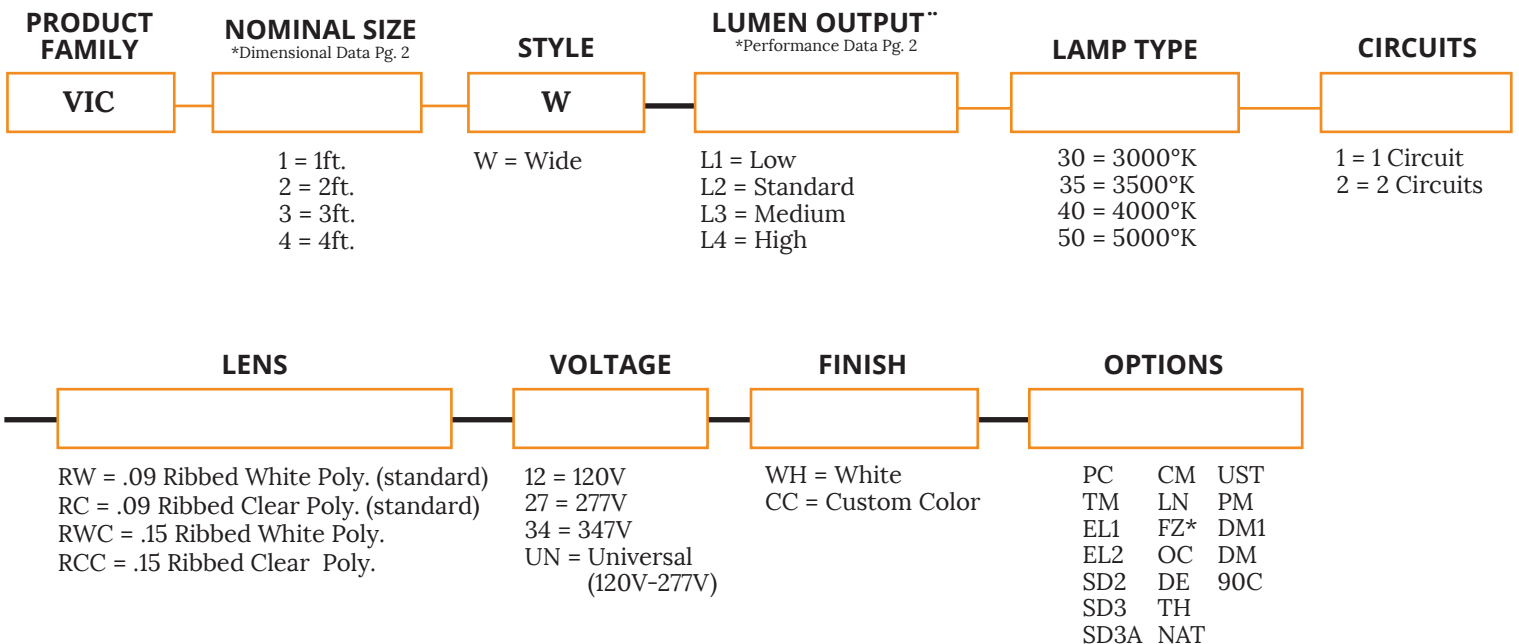


KEY

- PC = Photocell (Flat end cap only)
TM = Tandem Mount Option, consult factory
EL1 = Emergency Battery Low
EL2 = Emergency Battery High
SD2 = Step. Dimming Module (50-100%)
SD3 = Step. Dimming Module (25-50-100%)
SD3A = Step. Dimming Module (33-66-100%)
CM = Corner Mount
LN = LED Night Light. Consult factory for available temp.
FZ = Fuse*

- OC = Occupancy Sensor
DE = Decorative end caps
TH = Torx Head Screws
NAT = Natatorium finish
UST = Unistrut Mounting Plate
PM = Pendant Mounting
DM1 = 0-10V dimming with 1-100% range
DM = 0-10V dimming with 10-100% range. Dimming wires will be extended outside of fixture
90C = 90 CRI

* Cannot use with UN voltage
** Subject to change

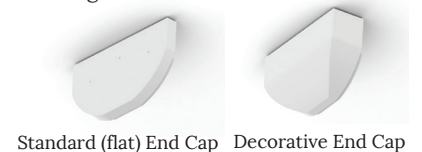


VICTORY WIDE LED



VIC1W/VIC2W/VIC3W/VIC4W

DIMENSIONAL DATA

VIC1W & VIC2W



VIC3W & VIC4W

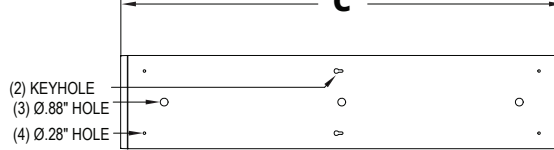

	A	B	C
VIC1W	10.50"	4.35"	13.80"
VIC2W	10.50"	4.35"	25.80"
VIC3W	10.50"	4.35"	37.81"
VIC4W	10.50"	4.35"	49.80"

PERFORMANCE DATA

MODEL	OUTPUT	LAMP TYPE	(RC) Clear Polycarbonate Lens			(RW) White Polycarbonate Lens		
			LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
VICW1	Low	3500°K	800	114	7	700	100	7
		4000°K	825	118	7	725	104	7
		5000°K	850	121	7	750	107	7
	Standard	3500°K	1500	115	13	1300	100	13
		4000°K	1550	119	13	1350	104	13
		5000°K	1600	123	13	1400	108	13
	Medium	3500°K	2200	116	19	1900	100	19
		4000°K	2250	118	19	1975	104	19
		5000°K	2300	121	19	2050	108	19
High	3500°K	2850	114	25	2500	100	25	
	4000°K	2950	118	25	2600	104	25	
	5000°K	3050	122	25	2700	108	25	
VICW2	Low	3500°K	1500	115	13	1300	100	13
		4000°K	1500	119	13	1350	104	13
		5000°K	1600	123	13	1400	108	13
	Standard	3500°K	2800	112	25	2500	100	25
		4000°K	2950	118	25	2600	104	25
		5000°K	3100	124	25	2700	108	25
	Medium	3500°K	4300	113	38	3700	97	38
		4000°K	4500	118	38	3900	103	38
		5000°K	4700	124	38	4100	108	38
High	3500°K	5600	112	50	4900	98	50	
	4000°K	5900	118	50	5100	102	50	
	5000°K	6200	124	50	5300	106	50	
VICW3	Low	3500°K	2050	108	19	1850	97	19
		4000°K	2200	116	19	1950	103	19
		5000°K	2350	124	19	2050	108	19
	Standard	3500°K	4100	108	38	3700	97	38
		4000°K	4400	116	38	3900	103	38
		5000°K	4700	124	38	4100	108	38
	Medium	3500°K	6150	108	57	5500	96	57
		4000°K	6600	116	57	5800	102	57
		5000°K	7050	124	57	6150	108	57
High	3500°K	8200	109	75	7300	97	75	
	4000°K	8700	116	75	7700	103	75	
	5000°K	9300	124	75	8100	108	75	
VICW4	Low	3500°K	2700	108	25	2400	96	25
		4000°K	2900	116	25	2550	102	25
		5000°K	3100	124	25	2700	108	25
	Standard	3500°K	5500	110	50	4900	98	50
		4000°K	5800	116	50	5100	102	50
		5000°K	6100	122	50	5300	106	50
	Medium	3500°K	8400	112	75	7400	99	75
		4000°K	8800	117	75	7700	103	75
		5000°K	9200	123	75	8000	107	75
High	3500°K	11200	112	100	9700	97	100	
	4000°K	11700	117	100	10200	102	100	
	5000°K	12300	123	100	10700	107	100	

Notes:

Specifications and Dimensions are subject to change without notice.

For additional options and dimensional details please consult your New Star Lighting Representative.