

TELECONFERENCE 22-24

SPECIALITY SERIES


Grid Luminaire



Made in America



DIMENSIONAL DATA

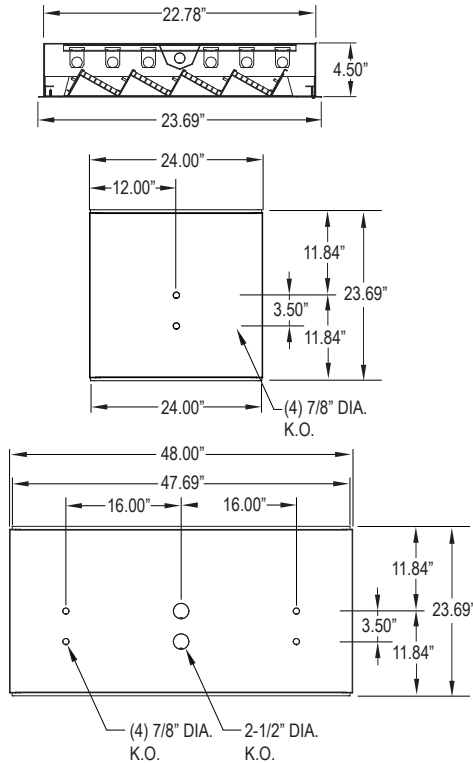

PROJECT
TYPE:
PRODUCT
APPROVED
DATE:

FEATURES

The New Star™ TEL22-TEL24™ luminaire is designed for video teleconference and produces a soft general illumination for effective picture capture

- 18 gauge CRS
- Indirect and uniform light output to illuminate a large area without producing harsh glare
- 1.5" parabolic cube louvers angled in multiple sections
- Black neoprene around door frame interior to prevent light leaks.

APPLICATION

- Video Conference Rooms
- Office Spaces
- Lobbies
- Inmate Visiting Rooms

SPECIFICATION FEATURES

HOUSING:

18G Die formed, seam welded and ground smooth.

DOOR:

18G Die formed one-piece frame with tightly closed corners 18G Die formed one-piece frame with tightly closed corners

LENS RETENTION:

1-1/2" x 1-1/2" x 1" parabolic louver that is ideal for lighted ceiling applications. The cell design and geometry allow greater lighting efficiencies while maintaining excellent brightness control.

ELECTRONICS:

Electronic Ballast <10% THD standard.

LED NIGHT LIGHT:

Integrated switch allows light selection at 100%,70%,40% and 10% levels

GASKET:

Black neoprene around door frame interior to prevent light leaks.

FASTENERS:

Phillips flat head screws.

FINISH:

Polyester powdercoat with 92% reflectance, following a 5 stage iron phosphate pre-treatment.

LABEL



ORDERING INFORMATION

Product Family	Gauge	# of Lamps	Lamp Type	# of Ballast	Voltage	Door Finish	Options
TEL_							
TEL22 23-11/16" x 24" x 4-1/2"	D = 18 Gauge CRS G = 18 Gauge SS	TEL22 2 = 2 Lamp 4 = 4 Lamp 6 = 6 Lamp	TEL22 17 = Linear 17W T8 14 = Linear 14W T5 24 = Linear 24W T5 HO	1 = Ballast 2 = Ballast	12 = 120V 27 = 277V 34 = 347V ■ UN = Universal (120V-277V)	BK = Black WH = White	DB = Ballast: Dimming (0-10V) * E1 = Emergency Ballast (450 Lumens) ◀ * E2 = Emergency Ballast (1350 Lumens) ◀ * PR = Programmable Ballast - Rapid Start TH = Torx Head Screws with center pin reject AH = Allenhead Screws with center pin reject NL = Fluorescent Night Light * LN = LED Night Light. Consult factory for available color /temperatures. FZ = Fuse Holder *
TEL24 23-11/16" x 48" x 4-1/2"	K = 18 Gauge SS (Painted)	TEL24 4 = 4 Lamp 6 = 6 Lamp	U6 = 32W U-Lamp ^ "6 in spacing" TEL24 28 = Linear 28W T5 32 = Linear 32W T8 54 = Linear 54W T5 (H.O.)				

- * Cannot use with universal voltage option
- Consult factory for lamp-ballast options
- ◀ Consult factory for T5 availability
- ^ 2 lamp only

Notes:

Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number.

