



DUETT
 VR ARCHITECTURAL SERIES
 DARK SKY LUMINAIRE
 FLUORESCENT/LED

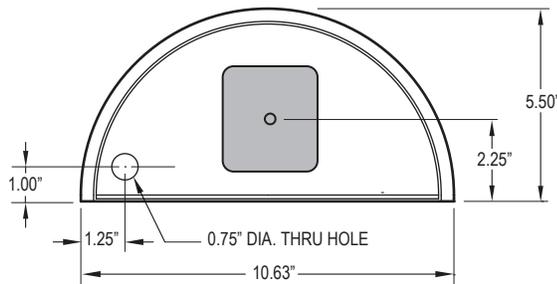

PROJECT
TYPE:
PRODUCT
APPROVED
DATE:

DIMENSIONAL DATA

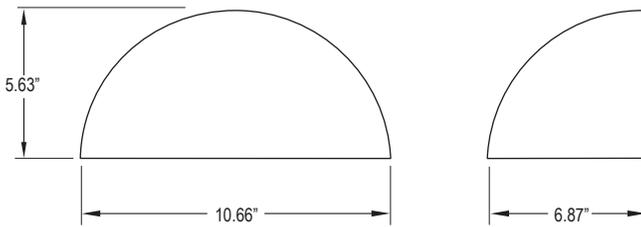

FEATURES

The New Star™ Duett™ is an architectural fixture that offers an innovative solution for upscale smart illumination without compromising strength

- Design orientation luminaire delivering protection against vandalism
- Die cast aluminum housing and face plate for durability and stability in the harshest of enviroments.
- Dust/splash proof and rugged enough for demanding situations
- Many lamp options available
- IP65 Rated

APPLICATION

- Public Areas
- Schools
- Hospitality
- Exterior Wall
- Corridors/Stairways
- Underpasses

SPECIFICATION FEATURES

HOUSING:

Die cast, one piece in low copper, high magnesium marine application aluminum alloy.

LENS:

UV stabilized white opal polycarbonate.

ELECTRONICS:

Fluorescent:
 Electronic Ballast <10% THD standard.

LED:

4.8W on 1 LED modules. Available in two color temperatures (3000° K & 5000° K).

REFLECTOR:

.40" thick white aluminum for high reflectivity.
 - for LED Aluminum reflector to serve as heat sink and unitized with electrical components.

GASKET:

An injection molded, continuous piece silicone rubber gasket to prevent infiltration.

FASTENERS:

Allen head screws (without center pin)
 - standard.

FINISH:

Extremely durable oven baked polyester powdercoat following a 5 stage iron phosphate pre-treatment in Black or White.

LABEL:



ORDERING INFORMATION

Product Family	# of Lamps	Lamp Type	Voltage	Finish	Options
NWDEU	-	-	-	-	-
NWDEU 5-5/8" x 10-11/16" x 6-7/8"	1 = Lamp	7TW = 7W Twin G-23 9TW = 9W Twin G-23 13TW = 13W Twin Gx23 13E = 13W Twin 2Gx7 13Q = 13W Quad G24q-1 18Q = 18W Quad G24q-2 26Q = 26W Quad G24q-3 LED: L35 = 3500°K L40 = 4000°K L50 = 5000°K	12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	BK = Black WH = White	EM* = Ballast: Emergency* ♦ (300-750 Lumens, must be remote) EML= Emergency Battery*♦ LED (must be remote) AH = Allen Head Screws (with center pin) TH = Torx Head Screws (with center pin)

- * Cannot use with UN voltage option
- ♦ Remote mount only
- Not available in 347V

Notes:

Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number. The New Star Promise will repair or replace any VR architectural fixture when installed according to New Star's instructions for the life of the original installation if the fixture should fail due to physical abuse.

