



NSR OPEN
(NSRO)










NSR CROSS
(NSRC)



NSR EYE LID
(NSRE)

DIMENSIONAL DATA

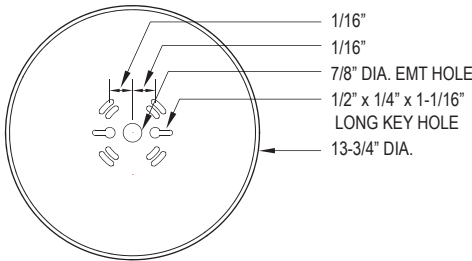

ORDERING INFORMATION

Product Family	Depth	Lamp Type	Lens	Voltage	Finish	Options
NSR_						
NSRE-NSRC-NSRO 13-3/4"	S = Shallow M = Medium D = Deep	LED: L35 = 3500°K ● L40 = 4000°K ● L50 = 5000°K ● Fluorescent: See options below	RC = Ribbed Clear Prismatic Polycarbonate RF = Ribbed Opal Lens	12 = 120V 27 = 277V UN = Universal (120V-277V) 34 = 347V	BK = Black WH = White BZ = Bronze PA = Painted Aluminum	EM = Ballast: Emergency (300-750 Lumens) * ♦ ♦ ◀ for CFL- remote for shallow housing EML = Emergency Battery LED (must be remote) * AH = Allen Head Screws w/ctr pin) TH = Torx Head Screws w/ctr pin) HO = High output (1,400lms) ■

SHALLOW HOUSING # of Lamps/Lamp Type		MEDIUM HOUSING # of Lamps/Lamp Type		DEEP HOUSING # of Lamps/Lamp Type	
1 = 1 Lamp	2 = 2 Lamp	1 = 1 Lamp	2 = 2 Lamp	1 = 1 Lamp	2 = 2 Lamp
13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3 32 = 32W Triple Gx24q-3	13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3 32 = 32W Triple Gx24q-3	13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3 32 = 32W Triple Gx24q-3 42 = 42W Triple Gx24q-4	13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3 32 = 32W Triple Gx24q-3 42 = 42W Triple Gx24q-4	13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3 32 = 32W Triple Gx24q-3 42 = 42W Triple Gx24q-4	13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3 32 = 32W Triple Gx24q-3 42 = 42W Triple Gx24q-4

* Cannot use with UN voltage option
◀ Not available with 2 42w Triple Gx24q-2
♦ Remote mount for shallow housing
● Not available in 347V
◀ Remote mounted EM for 2-lamp 32W or 42W
■ Only available in 5000°K

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED: _____

DATE: _____

FEATURES

The New Star "NSR Open-Cross-Eyelid" are quality driven lighting fixture that excels at providing vandal resistance performance with uncomplicated styles

- Design oriented cast aluminum luminaire for vandal resistance
- Available in 3 depths for various lamping options
- Injection molded UV stabilized polycarbonate lens with integral gasket
- J-Box knock out and level bar for quick and easy installation

APPLICATION

- Public Areas
- Corridors
- Walls
- Stairways
- Schools
- Underpasses

SPECIFICATION FEATURES

HOUSING: Marine grade Die cast, one piece casted aluminum alloy.

GAURD: Molded from UV- stabilized Polycarbonate.

LENS: .125" thick, injection molded lens w/ radial prisms, to provide superior illumination. Lenses are molded from UV stabilized polycarbonate.

ELECTRONICS: Fluorescent: Electronic Ballast <10% THD standard.

LED: 19.2W on 4 LED modules. Available in three color temperatures (3500° K, 4000° K & 5000° K).

REFLECTOR: Aluminum reflector to serve as heat sink and utilized with electrical components.

GASKET: One piece die cut .188" thick black EPDM foam rubber with adhesive backing to affix to housing. Extruded and spliced EPDM ribbed rubber gasket for lens.

FASTENERS: Tamper resistant Torx head screws with center pin reject.

FINISH: Extremely durable oven baked polyester powdercoat following a 5 stage iron phosphate pre-treatment in Black, Bronze, or White color.

LABEL: