

STARMED MUS UNDERCABINET LED

MUS2/MUS3/MUS4

SPECIFICATION FEATURES

- HOUSING:** 20 gauge formed cold rolled steel housing with continuous seam welds and ground smooth. Aluminum option available.
- LENS:** Lens is .125 Prismatic Acrylic.
- LED:** Available in three color temperatures 3000°K, 3500°K and 4000°K. Other color temperatures available, consult factory. Standard 0-10V driver provided. Optional dimming function (DM) with 10-100% range.
- FINISH:** White antimicrobial powder coat finish following iron phosphate pre-treatment.
- MOUNTING:** Keyhole slots for easy installation. Mounting screws are not provided.



APPLICATION:

Patient Rooms, Nurse Stations, Desk Stations, Offices, Research Facilities, Laboratories, Display cases, and more.



LABEL:

Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Ex: MUS2-HC-L1-35-A-UN

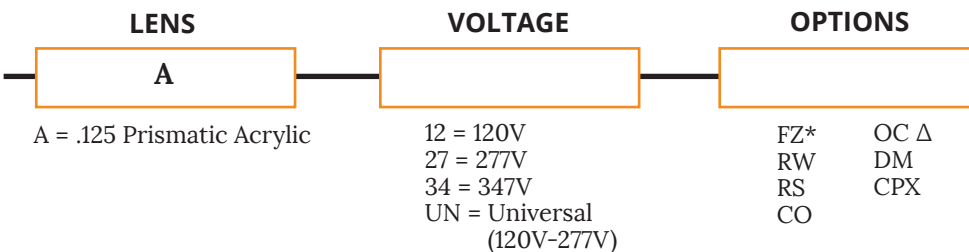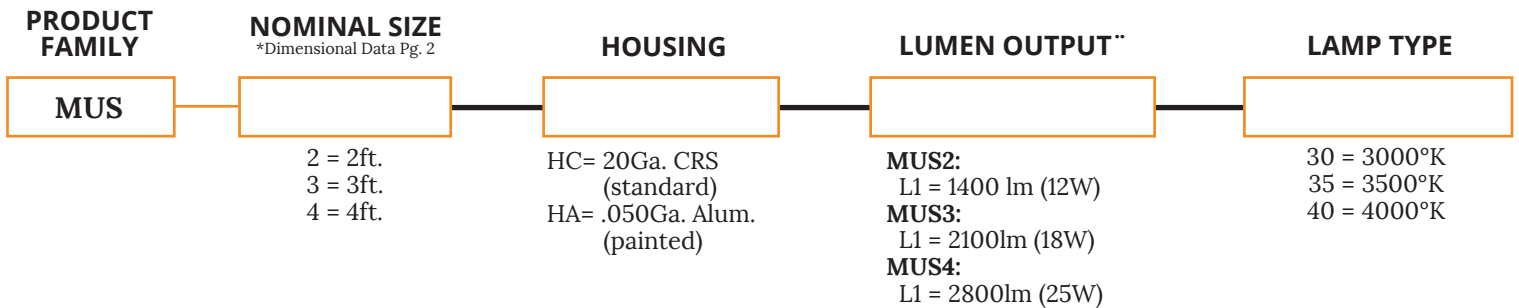


KEY

- FZ = Fuse*
- RW = Row Mounting (consult factory for options)
- RS = Rocker Switch (120V standard). Additional voltage options, consult factory.
- CO = Convenience Outlet (120V only)
- OC = Motion Sensor (Integral)Δ
- DM = 0-10V dimming with 10-100% range. Dimming wires will be extended outside of fixture.
- CPX = 6ft. Cord with Plug (120V)
- X = Specify location (R = Right, L = Left, C = Center)
- ** Subject to change
- * Cannot use with UN voltage
- Δ Not available in 347V

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.

DIMENSIONAL DATA

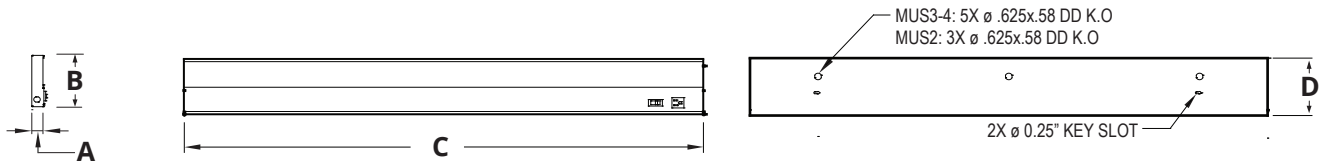

	A	B	C
MUS2	1.16"	5.00"	22.50"
MUS3	1.16"	5.00"	34.31"
MUS4	1.16"	5.00"	46.12"

Notes:
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.

STARMED UNDERCABINET 2-3-4 FLUORESCENT

MUS2/MUS3/MUS4

SPECIFICATION FEATURES

HOUSING: 20 gauge formed cold rolled steel housing with continuous seam welds and ground smooth. Aluminum option available.

LENS: Lens is .125 Prismatic Acrylic.

ELECTRONICS: Electronic Ballast <10% THD standard. Lamps by others.

FINISH: White antimicrobial powder coat finish following iron phosphate pre-treatment.

MOUNTING: Keyhole slots for easy installation. Mounting screws are not provided.



APPLICATION:

Patient Rooms, Nurse Stations, Desk Stations, Offices, Research Facilities, Laboratories, Display cases, and more.



LABEL:

Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Ex: MUS2-HC-1-14-A-12

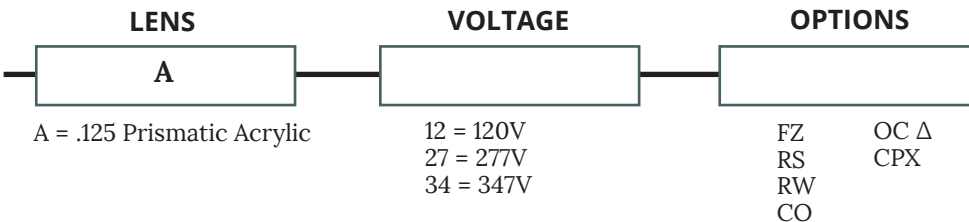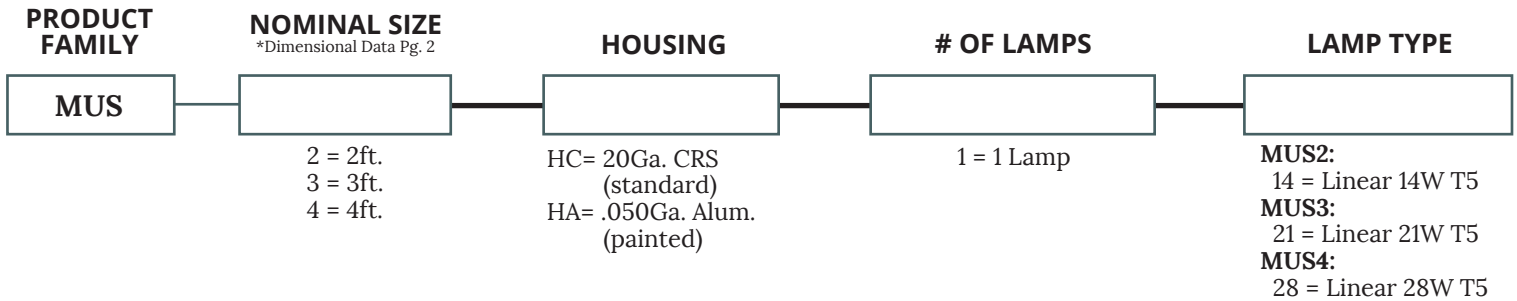

KEY

FZ = Fuse
RW = Row Mounting (consult factory for options)
RS = Rocker Switch (120V standard).
Additional voltage options, consult factory.
CO = Convenience Outlet (120V only)

OC = Motion Sensor (Integral)Δ
CPX = 6ft. Cord with Plug (120V)
X = Specify location
(R = Right, L = Left, C = Center)

Δ Not available in 347V


Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.

STARMED UNDERCABINET 2-3-4 FLUO.

MUS2/MUS3/MUS4



DIMENSIONAL DATA

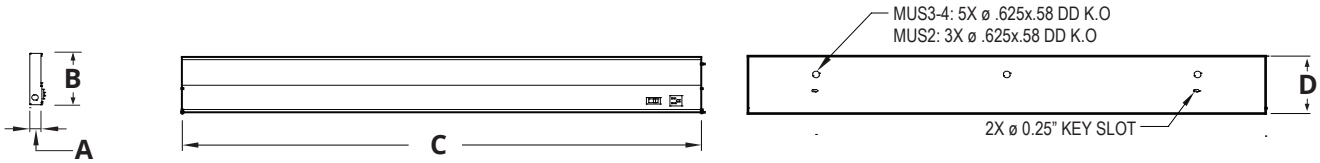

	A	B	C
MUS2	1.16"	5.00"	22.50"
MUS3	1.16"	5.00"	34.31"
MUS4	1.16"	5.00"	46.12"

Notes:
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.