

UMW2-UMW4

CONFINEMENT SERIES


SURFACE LUMINAIRE

CLAMSHELL DESIGN FOR MAX. TO SUPERMAX SECURITY
FLUORESCENT/LED



PROJECT:
TYPE:
PRODUCT:
APPROVED:
DATE:

DIMENSIONAL DATA

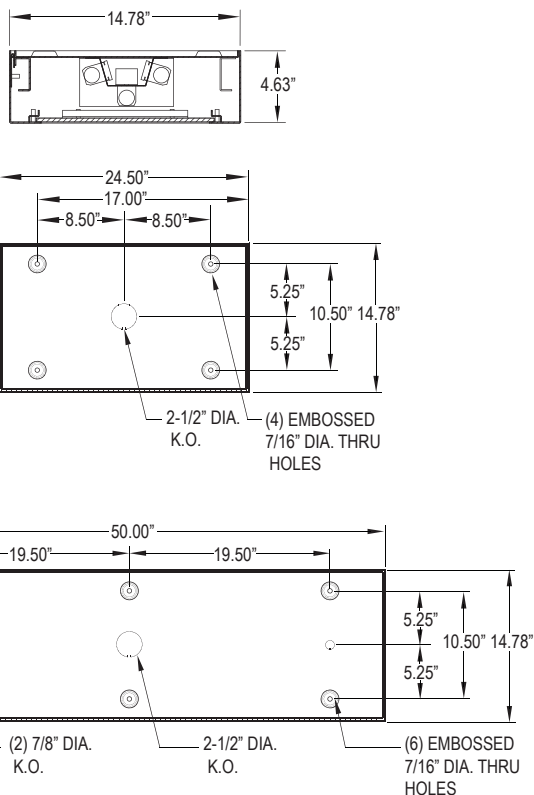

FEATURES

The New Star "UMW2-UMW4" Confinement clamshell fixture is designed for max to super security application

- 16-12 gauge die formed steel or stainless steel clam shell housing with full length continuous staked piano hinge with welded end
- Reinforced internal sidewall
- Maximum to super maximum security application
- Wide variety of lens options held in place with Z-Channel and weld studs
- Torx head center pin screws standard
- Black neoprene gasket around door frame to prevent light leaks
- Clamshell design incorporates a contraband drop slot gap between the ceiling and the back of fixture
- Optional wet location

APPLICATION

- Confinement
- Psychiatric Wards
- Detention Centers
- Public Housing Complexes
- Transportation Applications
- Athletic Facilities
- Locker Rooms

SPECIFICATION FEATURES

HOUSING:

Die formed, seam welded, and ground smooth (specify material and gauge). Incorporates a removable reflector unitized with all electrical components for easy installation and maintenance.

BACKPLATE:

Die formed with contraband drop slot and embossed mounting holes(materials and gauge to match housing). Security caulking between ceiling and fixture is not required with this back plate design.

HINGE:

16 gauge full length continuous, staked piano hinge, with welded ends. to prevent removal (material to match housing).

LENS / LENS RETENTION:

Lens per specification (see options) and secured by "Z" retainers with weld studs spaced six inches apart for maximum strength.

ELECTRONICS:

Fluorescent:
 Electronic Ballast <10% THD standard. RIF available. Lamps by others.

LED:

Available in three standard color temperatures 3500°K, 4000°K & 5000°K. Other color temperatures available, consult factory.

LED NIGHT LIGHT:

Integrated switch allows light selection at 100%, 70%, 40% and 10% levels

GASKET:

Black neoprene gasket around door frame to prevent light leaks

FASTENERS:

Tamper resistant countersunk, flat head Torx screws with center pin reject

FINISH:

Polyester powdercoat with 92% reflectance, following a 5 stage iron phosphate pre-treatment

LABEL:



ORDERING INFORMATION

Product Family	Gauge	# of Lamps	Lamp Type	# Ballasts/Drivers	
UMW_					
UMW2 14-3/4" x 24-1/2" x 4-5/8"	A = 12 Ga. CRS B = 14 Ga. CRS C = 16 Ga. CRS D = 18 Ga. CRS E = 14 Ga. SS (Brushed) F = 16 Ga. SS (Brushed)	Fluorescent UMW2-UMW4: 1 = 1 Lamp 2 = 2 Lamp 3 = 3 Lamp LED UMW2: L1 = LED 1 Row (12.5) L2 = LED 2 Row (25W) L3 = LED 3 Row (37.5W)	LED UMW4: L1 = LED 1 Row (25W) L2 = LED 2 Row (50W) L3 = LED 3 Row (75W) Fluorescent UMW2: 17 = Linear 17W T8 14 = Linear 14W T5 24 = Linear 24W T5 HO 40 = 40 Twin 2Gx11 LED: 35 = White 3500°K 40 = White 4000°K 50 = White 5000°K Fluorescent UMW4: 32 = 32W T8 28 = 28W T5 54 = 54W T5 HO	Fluorescent: 1 = Ballast 2 = Ballast LED: 1 = Driver 2 = Driver	
Outer Lens		Inner Lens	Voltage	Options	
Ø = No Lens A = .125 Clear Poly. B = .156 Clear Poly. 1 = .187 Clear Poly. 2 = .250 Clear Poly. 3 = .375 Clear Poly.	4 = .500 Clear Poly. 5 = .187 Clear Temp.Glass 6 = .250 Clear Temp.Glass 7 = .375 Clear Temp.Glass [^] 8 = .500 Clear Temp.Glass [^] 9 = .750 Clear Temp.Glass [^]	Ø = No Lens A = .125 Pris. Acrylic B = .125 Pris. Poly. C = .156 Pris. Poly. D = .187 Pris. Poly.	E = .156 Pris. Temp. Glass F = .156 Pris. Acrylic G = .140 DR Acrylic LC3 = .125 White Frosted Polycarbonate	12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	DB = Ballast: Dimming (0-10V) * E1 = Emerg.Ballast (450 Lumens) * E2 = Emerg.Ballast (1350 Lumens) * EL1 = Emerg. Bat. LED Low EL2 = Emerg. Bat. LED High PR = Program. Rapid Start Ballast AH = Allenhead Screws with center pin reject NL = Fluorescent Night Light * LN = LED Night Light. Consult factory for available color /temperatures. FZ = Fuse Holder * WN = Wet Location UV = .005 UV Absorbing Overlay
[^] Must Use 12 or 14 Gauge Frame * Cannot use with universal voltage option		◀ Consult factory for T5 availability ■ Consult factory for lamp-ballast options			

Notes:

Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number.



www.newstarlighting.com

New Star - 4000 S. Bell St. - Chicago, IL 60609 - TEL (773) 847-1400 - FAX (773) 254-6811 - V013

Based on a .125 Clear Polycarbonate Outer lens / .125 Prismatic Acrylic Inner lens

# LED BOARDS	# ROWS	WATTAGE	EFFICACY (lm/W)	DELIVERED LUMENS
UMW2:				
L1	1 Rw	(12.5W)	110	1,375 LMS
L2	2 Rw	(25.0W)	110	2,750 LMS
L3	3 Rw	(37.5W)	110	4,125 LMS
UMW4:				
L1	1 Rw	(25.0W)	110	2,750 LMS
L2	2 Rw	(50.0W)	110	5,500 LMS
L3	3 Rw	(75.0W)	110	8,250 LMS

TAKE AN ADDITIONAL 20% OFF DELEIVERED LUMENS WHEN SPECIFYING THE LC3 LENS