



LUNARE

ARCHITECTURAL SERIES
WALL MOUNT
FLUORESCENT / LED



No up or down "G" type selection

DIMENSIONAL DATA

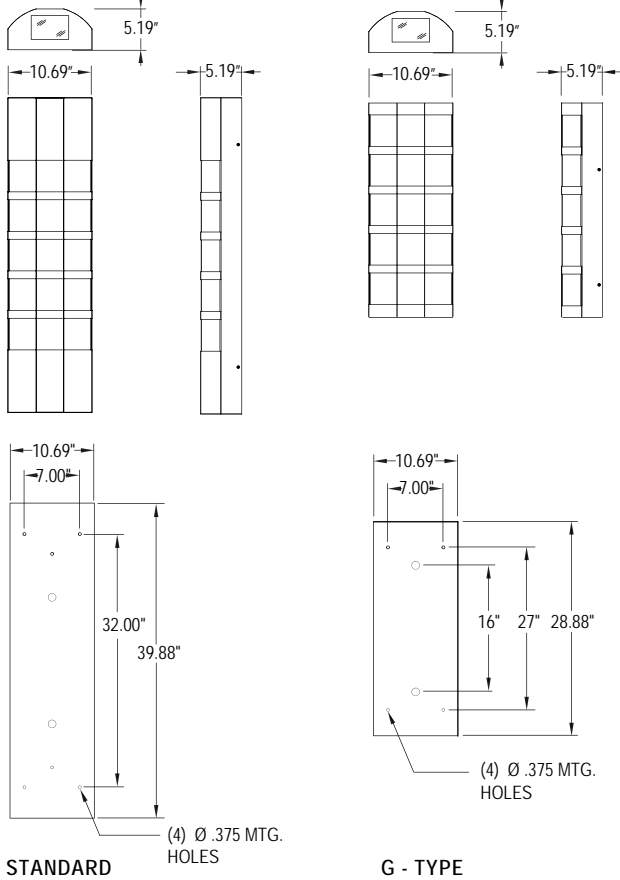

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED: _____

DATE: _____

DESCRIPTION

New Star's "Lunare" wall mount Architectural series is the ideal choice for demanding application where style, form, function and performance are essential.

APPLICATIONS

- Hotel
- Retail
- Condos

SPECIFICATION FEATURES

HOUSING:

Consists of formed sheet metal as primary with marine grade extruded aluminum center housing with cast aluminum end-caps.

LENS RETENTION:

Silicone sealed glass with hold down rails. Center housing incorporates a unique swing rail design for ease of lens removal for lamp replacement and maintenance.

ELECTRONICS:

Fluorescent: Electronic Ballast <10% THD standard.

LED:

Available in three standard color temperatures 3500°K, 4000°K & 5000°K. Other color temperatures available, consult factory.

REFLECTOR:

Faceted 22 gauge specular aluminum for maximum rigidity and controlled light distribution.

GASKET:

EPDM gasketing to prevent water and dust infiltration.

FASTENERS:

Flat head tamper proof screws on exterior cover (2) ea. side - (4) total. Center housing utilizes (2) ea. side - (4) total.

FINISH:

5 stage wash and pre-treat, with a polyester powder coat finish.

ORDERING INFORMATION

Product Family	Face Frame	Center Lamps	Center Lamp Type	# Ballast	Center Lens
LUN	-	-	-	-	-
LUNARE 10.69" x 39.88" x 5.19"	C = 16 Ga. CRS	Fluorescent: 1 = 1 Lamp 2 = 2 Lamp 3 = 3 Lamp 4 = 4 Lamp	LED: L1 = LED 1 Row (12.5 Watts) L2 = LED 2 Row (25 Watts) L3 = LED 3 Row (37.5 Watts) L4 = LED 4 Row (50 Watts)	Fluorescent: 14 = Linear 14W T5 17 = Linear 17W T8 24 = Linear 24W T5 (H.O.)	LED: 35 = White 3500°K 40 = White 4000°K 50 = White 5000°K
LUNARE - G type 10.69" x 28.88" x 5.19"				Fluorescent: 1 = Ballast 2 = Ballast	LED : 1 = Driver 2 = Driver
					RW = Ribbed White Polycarbonate RC = Ribbed Clear Polycarbonate
Lamp Type	Up Down Lens	Voltage	Finish		
-	- 5 -	-	-		
LED UP/DOWN: A = 1 Up / 1 Down B = 1 Up / 0 Down E = 0 Up / 1 Down G = 0 Up / 0 Down (9.5W LED Lamp)	5 = .187 Clear Temp. Glass	12 = 120V	WH = White BZ = Bronze BK = Black CC = Custom Color (Specify RAL number)		

Notes:

Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number.