


# STWL TRES

## STAIRWELL SERIES

LINEAR LUMINAIRE  
LED



### DIMENSIONAL DATA

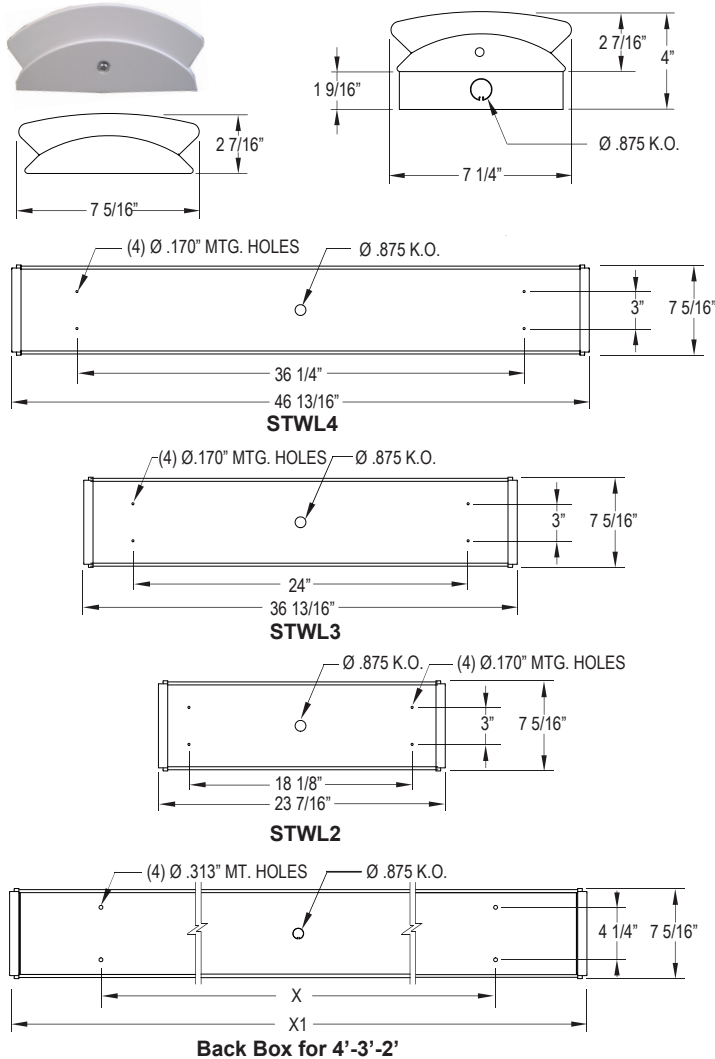

### ORDERING INFORMATION

Product Family	# of Lamps	Lamp Type	Voltage	Options
<b>STWL_</b>	-		-	
<b>STWL2-T</b> 23-7/16" X 7-5/16" X 2-7/16"	<b>STWL2-T</b> L2 = LED (15W) 1,500 LMS	<b>LED:</b> 35 = White 3500°K 40 = White 4000°K 50 = White 5000°K	<b>UN</b> = Universal (120V-277V) 34 = 347V	<b>BB</b> = Back Box (required for emergency battery.) <b>EL1</b> = Emerg. Battery. Low • (1,100 lms) <b>EL2</b> = Emerg. Battery. High • (2050 lms) <b>OC</b> = Internal occupancy Sensor <b>CM</b> = Corner Mount Bracket
<b>STWL3-T</b> 36-13/16" X 7-5/16" X 2-7/16"	<b>STWL3-T</b> L2 = LED (25W) 2,500 LMS			<b>SD2</b> = Step Dimming Module ▶ (50-100%) <b>SD3</b> = Step Dimming Module ▶ (25-50-100%) <b>SD3A</b> = Step Dimming Module ▶ (33-66-100%)
<b>STWL4-T</b> 46-13/16" X 7-5/16" X 2-7/16"	<b>STWL4-T</b> L2 = LED (60W) 5,160 LMS ■ L2L = LED (40W) 3,440 LMS			<b>TH</b> = Torx Head screws (with center pins) <b>LN</b> = LED Night Light. Consult factory for available color /temperatures.

- Will need an optional back box which changes depth of fixture
- DLC listed

▶ Please consult factory for 277V availability



PROJECT:
TYPE:
PRODUCT:
APPROVED:
DATE:

### FEATURES

The New Star "STWL-T" Stairwell fixture is an extreme durable linear fixture designed for locations where rugged security lighting is absolutely required

- Vandal resistance linear luminaire constructed of cold rolled steel.
- Dimming 0-10 standard
- Emergency Driver requires back box
- Conduit surface entry requires back box

### APPLICATION

- Stairwells
- Apartment Buildings
- School Campuses
- Public Housing Complexes
- Transportation Terminals
- Utility Corridors
- Hotels
- Locker Rooms
- Detention Centers
- Military Barracks
- Hospitals
- Public Washrooms
- Park Field Houses

### SPECIFICATION FEATURES

#### HOUSING:

22 Ga. CRS (cold rolled steel) internally reinforced.

#### REFLECTOR:

22 Ga. CRS high reflective white

#### LENS:

.10 linear prismatic frosted polycarbonate

#### LED:

Available in 3500°K, 4000°K & 5000°K  
82 CRI

#### PERFORMANCE:

4FT 60W : 86 LPW 84 CRI

#### Back Box Dimension for 4'-3'-2' :

LENGTH	X	X1
2 FT.	18"	23 7/16"
3 FT.	21"	36 13/16"
4 FT.	36 1/4"	46 13/16"

#### FINISH:

Powdercoat finish in white following a iron phosphate pre-treatment.

#### LABEL:



STWL4-T-LP-L240-UN  
ONLY FIXTURES LISTED MEETS "DLC"

