




TARK 22

TOP ACCESS
RETROFIT KIT 2x2

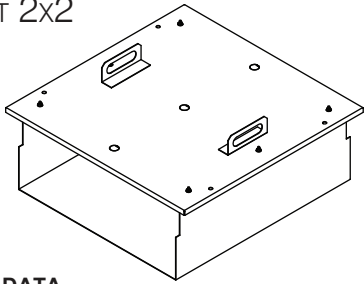

PROJECT:
TYPE:
PRODUCT:
APPROVED:
DATE:

DIMENSIONAL DATA

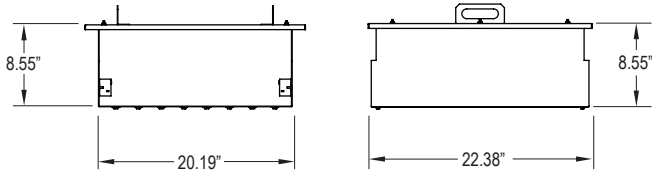

FEATURES

The New Star "Tark 22" top access retrofit kit will turn old HID fixture into stylish and efficient LED luminaire.

- Designed to retrofit 2' X 2' top access luminaire
- Combination of 16 ga. aluminum and 18 ga. cold rolled steel kit assembly
- One (1) piece assembly makes installation quick and easy
- Wing nuts permit tool-free installation
- Black neoprene gasket for contamination control
- Suitable for damp locations

APPLICATION

- Cleanroom
- Laboratory
- Hospital
- Food Processing Facilities
- Hi- Technology Manufacturing
- Public Housing Complexes
- Athletic Facilities
- Locker Rooms

SPECIFICATION FEATURES

CONSTRUCTION:

Die formed, combination of 16 ga. aluminum and 18 ga. cold roll steel retrofit kit

POWER SUPPLY:

Integral LED Driver
Input Voltage : AC120V-277V

LED:

Available in three standard color temperatures 3500°K, 4000°K & 5000°K. Other color temperatures available, consult factory

LED NIGHT LIGHT:

Integrated switch allows light selection at 100%, 70%, 40% and 10% levels

GASKET:

Black neoprene gasket to prevent water and dust infiltration

FINISH:

White powdercoat finish following iron phoshate pre-treatment


MOUNTING :

One piece kit assembly allows quick and easy installation.

FASTENERS:

(4) 1/4" -20 wing nuts (by others) permit tool-free installation

LABEL:



ORDERING INFORMATION

Product Family	Material Type	# of Rows	Color Temp.	Driver	Finish	Voltage
TARK22	-	-	-	-	-	-
TARK22 23" x 23" x 8.55"	ALCR = .051 Aluminum / Cold Rolled Steel 18 Ga.	L2 = LED 2 Row (25 Watts) L3 = LED 3 Row (37.5 Watts) L4 = LED 4 Row (50 Watts) L5 = LED 5 Row (62.5 Watts) L6 = LED 6 Row (75 Watts) L7 = LED 7 Row (87.5 Watts) L8 = LED 8 Row (100 Watts)	LED: 35 = White 3500°K 40 = White 4000°K 50 = White 5000°K	LED: 1 = Driver 2 = Driver	WH = White CC = Custom Color (specify RAL number)	12 = 120V 27 = 277V UN = Universal (120V-277)
Options						
E1 = Emergency Battery DM = Dimming LED Driver (0-10V) LN = LED Night Light. Consult factory for available color/temperatures. FZ = Fuse Holder						

Notes:

Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number.