





# VICTORY 2-3-4 W

## VR ARCHITECTURAL SERIES

LINEAR LUMINAIRE  
FLUORESCENT



### DIMENSIONAL DATA

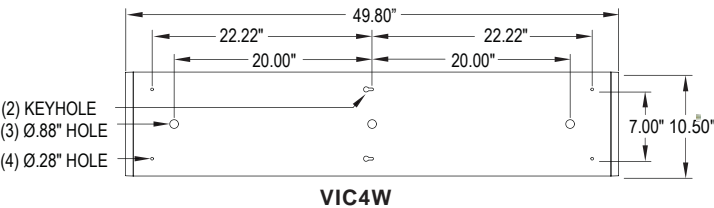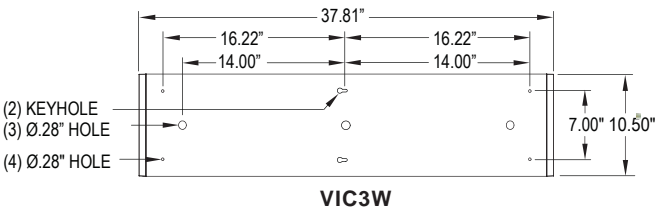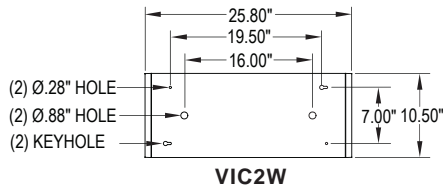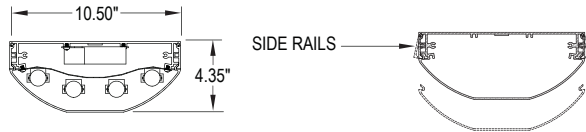

### FEATURES

The "Victory" provides a real solution to the strength vs. style issue with uncompromising durability and an aesthetically pleasing streamline look. The Victory has a unique side rail design for ease of lens removal allowing for efficient maintenance and lamp replacement.

- Architectural linear luminaire that melds aesthetics, function and vandal resistance
- Extruded aluminum narrow or wide housing with die cast end caps
- Many options available
- Wet location listed (for covered ceiling only)

### APPLICATION

- Public Areas
- Corridors
- Walls
- Stairways
- Schools
- Underpasses
- Public Washrooms
- Dormitories
- Factories
- Warehouses

### SPECIFICATION FEATURES

#### HOUSING:

Marine grade extruded aluminum frame with cast aluminum endcaps. Includes knockouts for surface conduit and tandem mounting.

#### DOOR:

Available with either a clear or white polycarbonate ribbed lens.

#### LENS RETENTION:

Unique swing rail design for ease of lens removal for lamp replacement and maintenance

#### ELECTRONICS:

**Fluorescent:** Electronic Ballast <10% THD standard.

#### LED NIGHT LIGHT:

Integrated switch allows light selection at 100%,70%,40% and 10% levels.

#### REFLECTOR:

Faceted 22 gauge specular aluminum for maximum rigidity and controlled light distribution.

#### LENS:

Linear ribbed clear and white polycarbonate lens. Two thickness available (standard .09 and .15)

#### GASKET:

EPDM gasketing to prevent water and dust infiltration.

#### FASTENERS:

Phillips flat head screws (3) ea. side - (6) total. (Standard). Other types available

#### FINISH:

5 stage wash and pre-treat, with a white polyester powdercoat finish.

#### LABEL:



### ORDERING INFORMATION

Product Family	# of Lamps	Lamp Type	Ballast	Lens	Voltage
<b>VIC_</b>					
VIC2W 10-1/2" x 25-13/16" x 4-3/8"	<b>Fluorescent:</b> 1 = 1 Lamp 2 = 2 Lamp 3 = 3 Lamp • 4 = 4 Lamp	VIC2W : VIC3W: VIC4W: 14 = Lin. 14W T5 21 = Lin. 21W T5 28 = Lin. 28W T5 17 = Lin. 17W T8 25 = Lin. 25W T8 32 = Lin. 32W T8 24 = Lin. 24W T5 39 = Lin. 39W T5 54 = Lin. 54W T5 (H.O.) (H.O.) (H.O.)	LED: 1 = Ballast 2 = Ballast 3 = Ballast 4 = Ballast	RW = Ribbed Wht. Poly. (.09 standard) RC = Ribbed Clr. Poly. (.09 standard) RWC = Ribbed Wht. Poly. (.15 custom) RCC = Ribbed Clr. Poly. (.15 custom)	12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277)
VIC3W 10-1/2" x 37-13/16" x 4-3/8"					
VIC4W 10-1/2" x 49-13/16" x 4-3/8"					

Finish	Options
WH = White CC = Custom Color (specify RAL number)	E1 = Emergency Battery (standard) * E2 = Emergency Battery (high) * DB = Dimming Ballast PR = Program Rapid Start LN = LED Night Light. Consult factory for available color/temperatures. FZ = Fuse Holder * OC = Occup. Sensor not avail. T5-T8 3 lamp/rw. •
	DE = Decorative End Caps ■ TH = Torx Head Screws w/ctr. pin S.S PC = Photocell (Flat end cap only) TM = Tandem Mount Option ■ NAT = Natatorium Finish UST = Unistrut Mounting Plate PM = Pendant Mount CM = Corner Mount



Standard (flat) End Cap



Decorative End Cap

- Advise quantity for end row mtg.
- \* Cannot use with universal voltage option
- Occupancy sensor not available with lampping

3-10-16

Notes:  
Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative. For specific electronic ballast, specify brand and catalog number.

