

# STARTILE 11-14-22-24 LED VR

AGV11/AGV14/AGV22/AGV24

## SPECIFICATION FEATURES

- HOUSING/FRAME:** White painted extruded aluminum frame (standard) encased in a 16 gauge cold rolled steel frame with beveled edges to deflect the force of an impact. Other finishes available.
- LENS:** Two lenses provide maximum durability. Interior lens is White Polycarbonate and exterior is .060 Clear Acrylic. Lens secured by "Z" rails.
- LED:** Available in four color temperatures 3000°K, 3500°K, 4200°K and 5700°K. Other color temperatures available, consult factory. Standard 0-10V driver with 10-100% range provided.
- FINISH:** Polyester powder coat following a 5 stage iron phosphate pre-treatment.
- POWER SUPPLY:** LED Driver included (remote).  
Input Voltage: AC120V-277V  
AGV11: Input Power 18.0W  
AGV14: Input Power: 40.0W  
AGV22: Input Power: 40.0W  
AGV24: Input Power: 75.0W



**APPLICATION:**  
Public Areas, Multifamily Housing, Restrooms, Schools, Transportation Platforms, Factories, Warehouses, Corridors, and more.

**MOUNTING:**  
Encased frame allows for quick and easy surface mounting to any ceiling or wall.


**LABEL:**  
Fixture is certified to UL standards for Wet Location.



U.S. Patent No. 8,277,091

## ORDERING INFORMATION

Ex: AGV11-OP-UN-42-D1

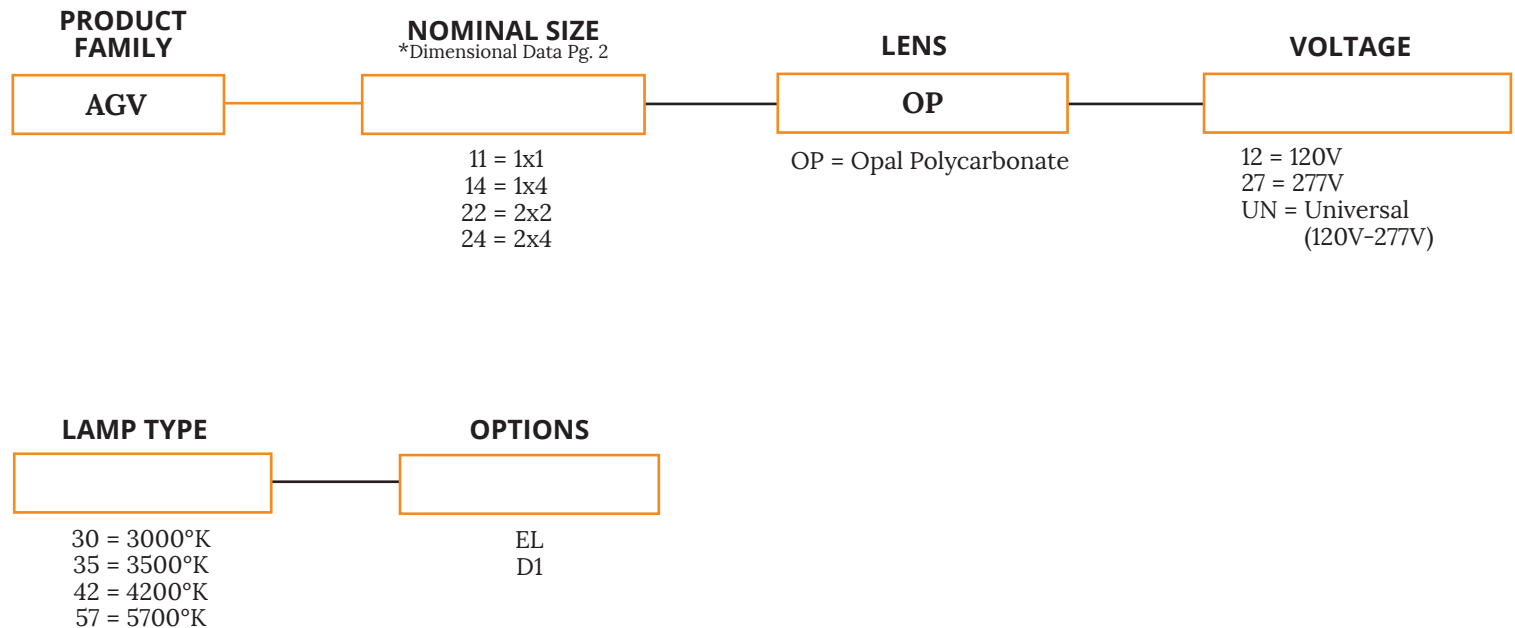

## KEY


EL = Emergency Battery Pack  
D1 = 0-10V dimming with 1-100% range

# STARTILE 11-14-22-24 LED VR

AGV11/AGV14/AGV22/AGV24



## DIMENSIONAL DATA

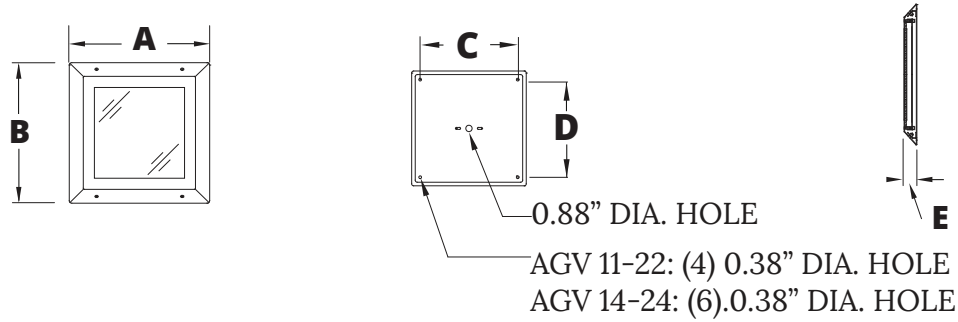

	A	B	C	D	E
AGV11	15.87"	15.87"	13.38"	13.38"	1.31"
AGV14	51.31"	15.87"	24.41"	13.38"	1.31"
AGV22	27.69"	27.9"	25.19"	25.19"	1.31"
AGV24	51.81"	27.69"	24.66"	25.19"	1.31"

## PERFORMANCE DATA

Model	Lamp Type	Lumens (Delivered)	Efficacy (lm/w)	Input Power (W)	Current (ma)	Est. L70 LED Life (hours)
AG11	3000°K	1500	83	18	450	50000
	3500°K	1600	88	18	450	50000
	4200°K	1760	98	18	450	50000
	5700°K	1800	100	18	450	50000
AG14	3000°K	3800	95	40	1100	50000
	3500°K	3900	97.5	40	1100	50000
	4200°K	4000	100	40	1100	50000
	5700°K	4080	102	40	1100	50000
AG22	3000°K	3800	95	40	1100	50000
	3500°K	3900	97.5	40	1100	50000
	4200°K	4000	100	40	1100	50000
	5700°K	4080	102	40	1100	50000
AG24	3000°K	7300	97	75	2140	50000
	3500°K	7400	98	75	2140	50000
	4200°K	7500	100	75	2140	50000
	5700°K	7650	102	75	2140	50000

Notes:  
Specifications and Dimensions are subject to change without notice.  
For additional options and dimensional details please consult your New Star Lighting Representative.