

STARTILE 22-DL LED

AGG22-DL

SPECIFICATION FEATURES

- HOUSING/FRAME:** 20 gauge formed cold rolled steel fixture frame.
- LENS:** Outer lens comes in White Acrylic and the Inner lens is Opal Polycarbonate.
- LED:** Available in four color temperatures 3000°K, 3500°K, 4200°K, and 5700°K. Other color temperatures available, consult factory.
- POWER SUPPLY:** LED Driver included (integral).
Input Voltage: AC120V-277V.
Input Power 40.0W.
- MOUNTING:** Grid units allow for quick and easy installation.
Earthquake clips standard.





APPLICATION:
Hotels, Medical Offices, Schools, Lobbies, Offices, and more.

LABEL:
Fixture is certified to UL standards for Damp Location.




ORDERING INFORMATION

Ex: AGG22-DL-OP-UN-35

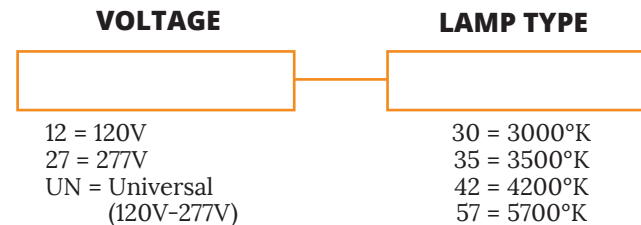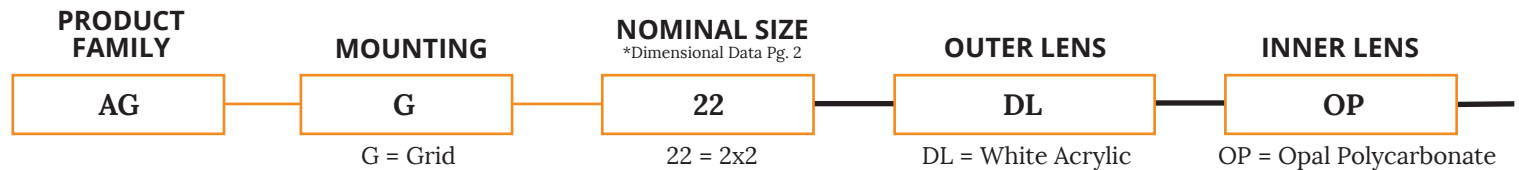

DIMENSIONAL DATA

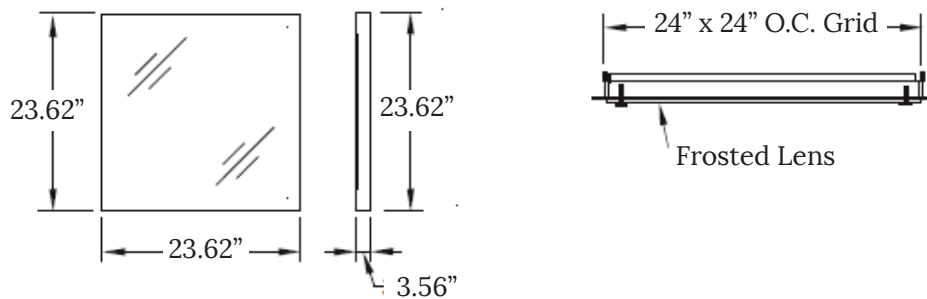

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.