

Project:			
Type:			
Product:			

# STARTILE 22-24 LED AGS22/AGS24/AGG22/AGG24/AGF22/AGF24

## **SPECIFICATION FEATURES**

**HOUSING:** Fixture Frame White Extruded Aluminum. Surface fixtures have a cold

rolled steel back pan. Flange fixtures have an external frame in

cold rolled steel.

**LENS:** Opal Polycarbonate lens standard.

**LED:** Available in four white color temperatures 3000°K, 3500°K, 4200°K

and 5700°K. Other color temperatures available, consult factory.

Optional Tunable White, operates via DMX. Standard 0-10V dimming with 10-100% range.

POWER SUPPLY: LED Driver Included.

Surface Mount has remote driver.

Grid/Flange Mount has an integral driver.

Input Voltage: AC120V-277V AG22: Input Power 40.0W AG24: Input Power 75.0W



#### **APPLICATION:**

Hospitals, Patient Rooms, Exam Rooms, Public Areas, Hotels, Dental Offices, Schools, Offices, and more.

#### **MOUNTING:**

Mounting screws are not provided.

#### LABEL:


Fixture is listed for UL Damp Location.






## **ORDERING INFORMATION**

Ex: AGS24-OP-UN-TW

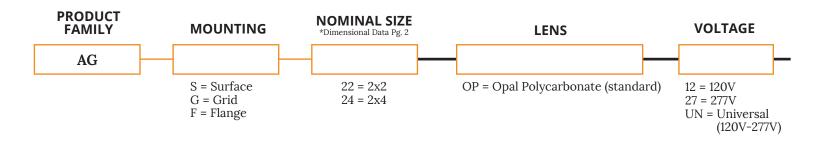

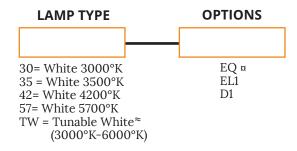

### **KEY**

EQ = Earthquake Clips ¤ EL1 = Emerg. Batt. LED Low D1 = Dimming Driver 1%

- ≈ Operates via DMX
- a Can only be used with Grid

Notes:

Image is a 2x4 StarTile

Specifications and Dimensions are subject to change without notice.


For additional options and dimensional details please consult your New Star Lighting Representative.


Page 1/2

## **STARTILE 22-24 LED** AGS22/AGS24/AGG22/AGG24/AGF22/AGF24



## **DIMENSIONAL DATA**

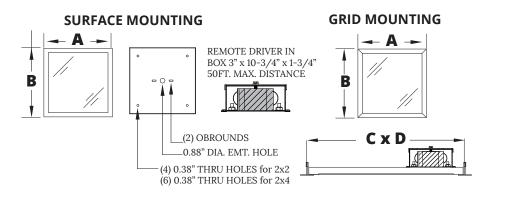



	A	В	С	D	Depth	Recommended Ceiling Cut-Out
AGS22	23.77"	23.77"	-	-	1.00"	N/A
AGS24	23.81"	47.93"	-	-	1.00"	N/A
AGG22	23.62"	23.62"	24"	24"	0.56"	N/A
AGG24	23.62"	47.62"	24"	48"	0.56"	N/A
AGF22	27.188"	27.188"	-	-	1.30"	24.188" x 24.188"
AGF24	50.813"	27.188"	-	-	1.30"	24.188" x 50.813"

# **PEFORMANCE DATA**"

Model	Lamp Type	Lumens (Delivered)	Efficacy (lm/w)	Input Power (W)	Current (ma)	Est. L70 LED Life (hours)
AG22	3000°K	3800	95	40	1100	50000
	3500°K	3900	97.5	40	1100	50000
	4200°K	4000	100	40	1100	50000
	5700°K	4080	102	40	1100	50000
AG24	3000°K	7300	97	75	2140	50000
	3500°K	7400	98	75	2140	50000
	4200°K	7500	100	75	2140	50000
	5700°K	7650	102	75	2140	50000