

STARTILE 11-14 LED
AGS11/AGS14/AGG11/AGG14/AGF11/AGF14

SPECIFICATION FEATURES

- HOUSING:** Fixture Frame White Extruded Aluminum. Surface fixtures have a cold rolled steel back pan. Flange fixtures have an external frame in cold rolled steel.
- LENS:** Opal Polycarbonate lens standard.
- LED:** Available in four white color temperatures 3000°K, 3500°K, 4200°K and 5700°K. Other color temperatures available, consult factory. Optional Tunable White, operates via DMX. Standard 0-10V Meanwell dimming driver with 10-100% range.
- POWER SUPPLY:** Surface Mount has remote driver. Grid/Flange Mount has an integral driver. Input Voltage: AC120V-277V
AG11: Input Power 18.0W
AG14: Input Power 40.0W



APPLICATION:
Hospitals, Patient Rooms, Exam Rooms, Public Areas, Hotels, Dental Offices, Schools, Offices, and more.



MOUNTING:
Mounting screws are not provided.

LABEL:
Fixture is listed for UL Damp Location.



ORDERING INFORMATION

Ex: AGS14-OP-UN-42

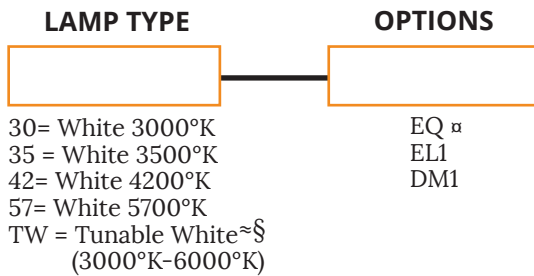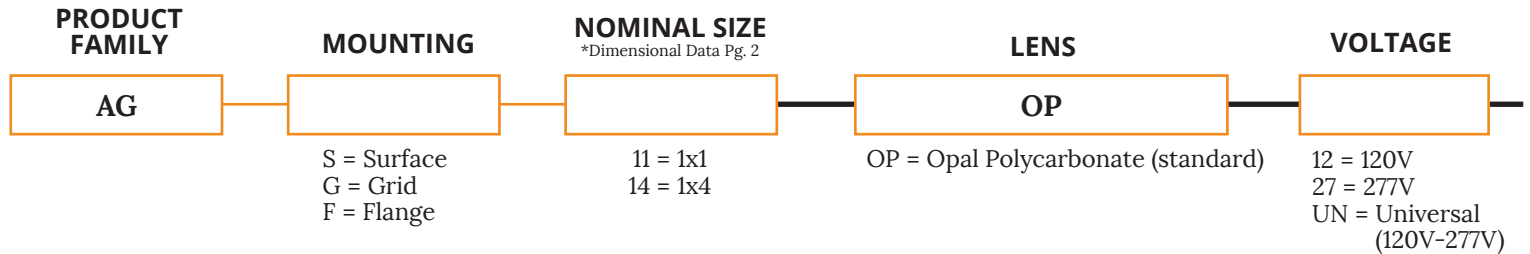


KEY

- EQ = Earthquake Clips/Suspended mounting bracket clips ^α [≈] Operates via DMX
 EL1 = Emerg. Batt. LED Low [§] Not available in 14 (1x4)
 DM1 = 0-10V dimming with 1-100% range ^α Can only be used with Grid

Notes:
Image is a 1x4 StarTile
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.

DIMENSIONAL DATA

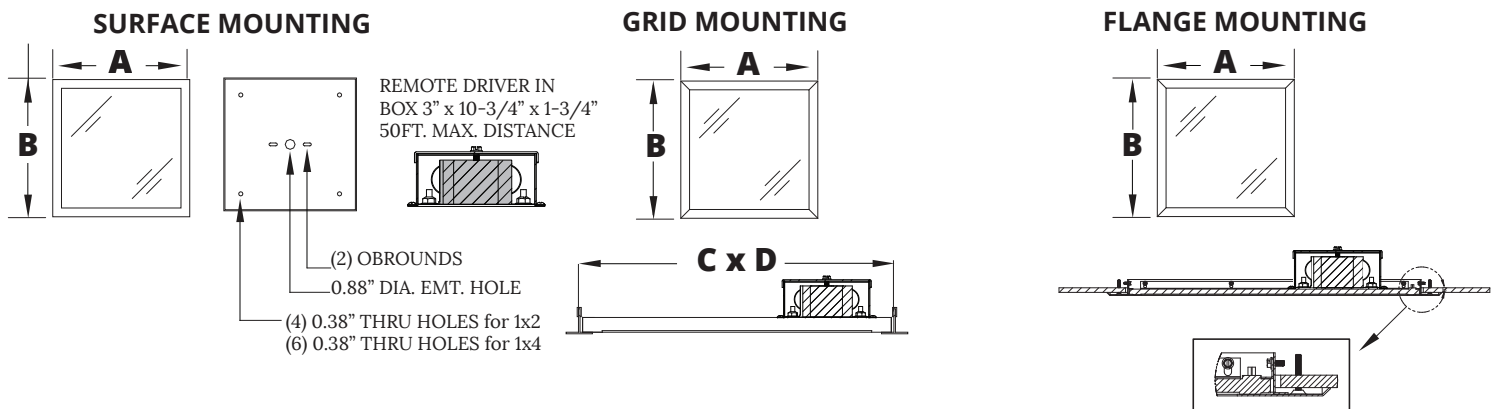

	A	B	C	D	Depth	Recommended Ceiling Cut-Out
AGS11	12.00"	12.00"	-	-	1.00"	N/A
AGS14	12.00"	47.375"	-	-	1.00"	N/A
AGG11	11.81"	11.81"	12"	12"	0.56"	N/A
AGG14	11.81"	47.75"	12"	48"	0.56"	N/A
AGF11	15.50"	15.50"	-	-	1.30"	12.438" x 12.438"
AGF14	15.38"	50.813"	-	-	1.30"	12.312" x 48.062"

PERFORMANCE DATA

Model	Lamp Type	Lumens (Delivered)	Efficacy (lm/W)	Input Power (W)
AG11	3000°K	1344	74.1	18
	3500°K	1350	75	18
	4200°K	1400	75.9	18
	5700°K	1586	85.7	18
	TW - 3000°K	585	63.1	9
	TW - 6000°K	652.5	69.7	9
AG14	3000°K	3648	93.5	40
	3500°K	3786	95	40
	4200°K	3800	95.8	40
	5700°K	4305	108.2	40

Notes:
 Performance Data subject to change without notice.
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.