

Project:

Type:

Product:

STARTILE IMAGE OVERLAY 11-14 LED AGS11/AGS14/AGG11/AGG14/AGF11/AGF14

SPECIFICATION FEATURES

HOUSING:	Fixture Frame White Extruded Aluminum. Surface fixtures have a cold rolled steel back pan. Flange fixtures have an external frame in cold rolled steel.
LENS:	Variety of image overlays to choose from. Optional custom image. Configurations on page 2. Surface and Flange fixtures are unavailable in certain configurations, consult factory for options.
LED:	Available in four white color temperatures 3000°K, 3500°K, 4200°K and 5700°K. Other color temperatures available, consult factory. Standard 0-10V dimming with 10-100% range.
POWER SUPPLY:	LED Driver Included. Surface Mount has remote driver

Surface Mount has remote driver. Grid/Flange Mount has an integral driver. Input Voltage: AC120V-277V AG11: Input Power 18.0W AG14: Input Power 40.0W

ORDERING INFORMATION





APPLICATION:

Hospitals, Patient Rooms, Exam Rooms, Public Areas, Hotels, Dental Offices, Schools, Offices, and more.

MOUNTING:

Mounting screws are not provided.

LABEL:

Fixture is listed for UL Damp Location.



PRODUCT **LENS/ IMAGE SELECTION NOMINAL SIZE** VOLTAGE FAMILY MOUNTING *Dimensional Data Pg. 2 (See Image Options on Pg. 3) AG S = Surface11 = 1x1RT = Red Flowers w. Tree 12 = 120VG = Grid14 = 1x4PT = Palm Tree 127 = 277VF = Flange WF = White Flower UN = Universal P2 = Palm Tree 2(120V-277V) TE = Tree BT = Blue Sky w Tree B1 = Blue Sky 1B2 = Blue Sky 2WT = White Tree WP = White Pink Tree YO = Yellow Orange Tree CI = Custom Image CONFIGURATION **OPTIONS** LAMP TYPE (See Options on Pg. 2) *Surface and Flange fixtures unavailable in certain configurations. Images may need to be edited based upon configuration. Consult factory for additional configuration options. 30= White 3000°K EQ ¤ 35 = White 3500°K EL1 42= White 4200°K D1 AG11: AG14: 57= White 5700°K « 11A 14A: Vertical 14B: Horizontal 11B: Vertical 11C: Horizontal 14C: Horizontal 11D: Square 14D: Vertical 14E: Vertical 11E: Horizontal 14F: Vertical **KEY** 14G: Horizontal EQ = Earthquake Clips ¤ EL1 = Emerg. Batt. LED Low CUC = Custom Configuration. D1 = Dimming Driver 1% See factory for details. ¤ Can only be used with Grid « Recommended for Image Overlays


Notes:

Image is a 1x4 StarTile with Blue Sky 2 Image Overlay (B2). Specifications and Dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative.


STARTILE IMAGE OVERLAY 11-14 LED AGS11/AGS14/AGG11/AGG14/AGF11/AGF14



CONFIGURATION OPTIONS *Consult factory for alternate configurations. Images may need to be edited based upon configuration.

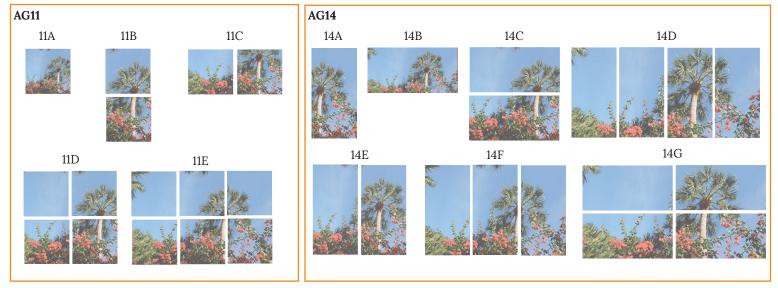

DIMENSIONAL DATA

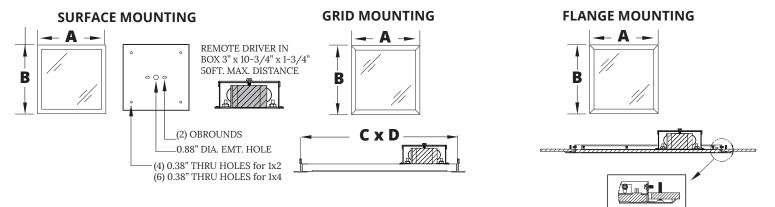

	А	В	С	D	Depth	Recommended Ceiling Cut-Out
AGS11	12.00"	12.00"	-	-	1.00"	N/A
AGS14	12.00"	47.375"	-	-	1.00"	N/A
AGG11	11.81"	11.81"	12"	12"	0.56"	N/A
AGG14	11.81"	47.75"	12"	48"	0.56"	N/A
AGF11	15.50"	15.50"	-	-	1.30"	12.483" x 12.438"
AGF14	15.38"	50.813"	-	-	1.30"	12.438" x 47.1875"

STARTILE IMAGE OVERLAY 11-14 LED AGS11/AGS14/AGG11/AGG14/AGF11/AGF14





RT = Red Flowers w Tree



PT = Palm Tree 1



WF = White Flower



B2 = Blue Sky 2



P2 = Palm Tree 2



Newstar

TE = Tree



BT = Blue Sky w Tree



 $D_{2} = D_{110} C_{17}$





WP = White Pink Tree



YO = Yellow Orange Tree CI = Custom Image



VKI Images Available. See Website for Selection.

