

STARTILE IMAGE OVERLAY 22-24 LED

AGS22/AGS24/AGG22/AGG24/AGF22/AGF24

SPECIFICATION FEATURES

- HOUSING:** Fixture Frame White Extruded Aluminum. Surface fixtures have a cold rolled steel back pan. Flange fixtures have an external frame in cold rolled steel.
- LENS:** Variety of image overlays to choose from. Optional custom image. Configurations on page 2. Surface and Flange fixtures are unavailable in certain configurations, consult factory for options.
- LED:** Available in four white color temperatures 3000°K, 3500°K, 4200°K and 5700°K. Other color temperatures available, consult factory. Standard 0-10V Meanwell dimming driver with 10-100% range.
- POWER SUPPLY:** LED Driver Included.
Surface Mount has remote driver.
Grid/Flange Mount has an integral driver.
Input Voltage: AC120V-277V
AG22: Input Power 40.0W
AG24: Input Power 80.0W



APPLICATION:
Hospitals, Patient Rooms, Exam Rooms, Public Areas, Hotels, Dental Offices, Schools, Offices, and more.


MOUNTING:
Mounting screws are not provided.

LABEL:
Fixture is listed for UL Damp Location.



ORDERING INFORMATION

Ex: AGS22-RT-UN-57-11B

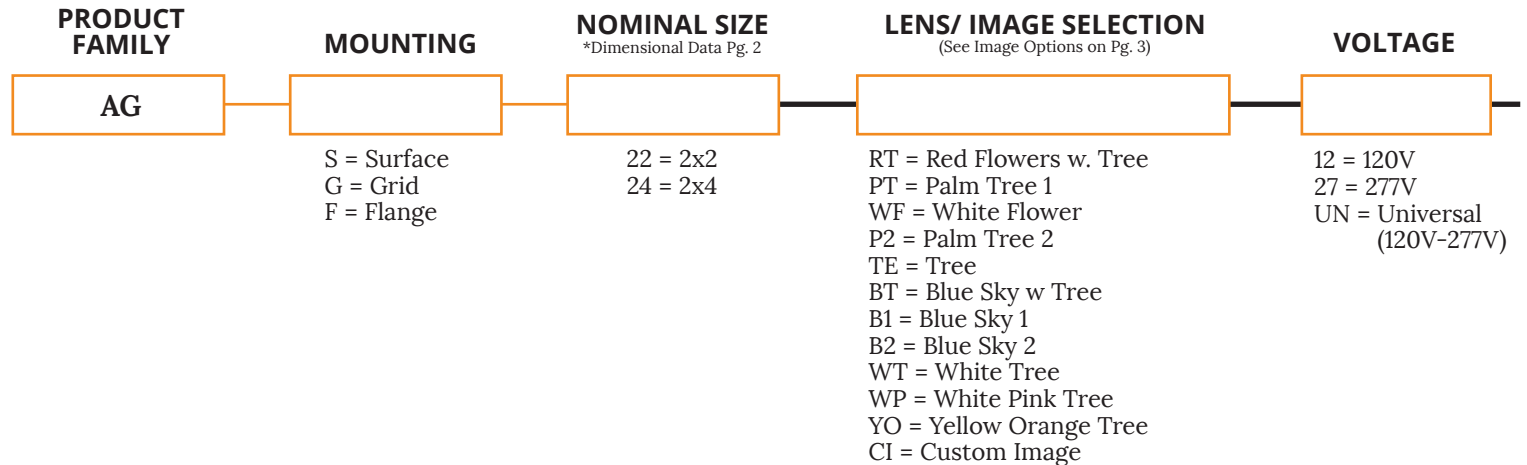

*Surface and Flange fixtures unavailable in certain configurations. Images may need to be edited based upon configuration. Consult factory for additional configuration options.

- | | |
|-----------------|-----------------|
| AG22: | AG24: |
| 22A | 24A: Vertical |
| 22B: Vertical | 24B: Horizontal |
| 22C: Horizontal | 24C: Horizontal |
| 22D: Square | 24D: Vertical |
| 22E: Horizontal | 24E: Vertical |
| | 24F: Vertical |
| | 24G: Horizontal |

CUC = Custom Configuration.
See factory for details.

KEY

- EQ = Earthquake Clips/Suspended mounting bracket clips α
EL1 = Emerg. Batt. LED Low
DM1 = 0-10V dimming with 1-100% range
α Can only be used with Grid
« Recommended for Image Overlays

Notes:
Image is a 2x4 StarTile with Blue Sky 2 Image Overlay (B2).
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.

STARTILE IMAGE OVERLAY 22-24 LED

AGS22/AGS24/AGG22/AGG24/AGF22/AGF24




CONFIGURATION OPTIONS

*Consult factory for alternate configurations. Images may need to be edited based upon configuration.



DIMENSIONAL DATA

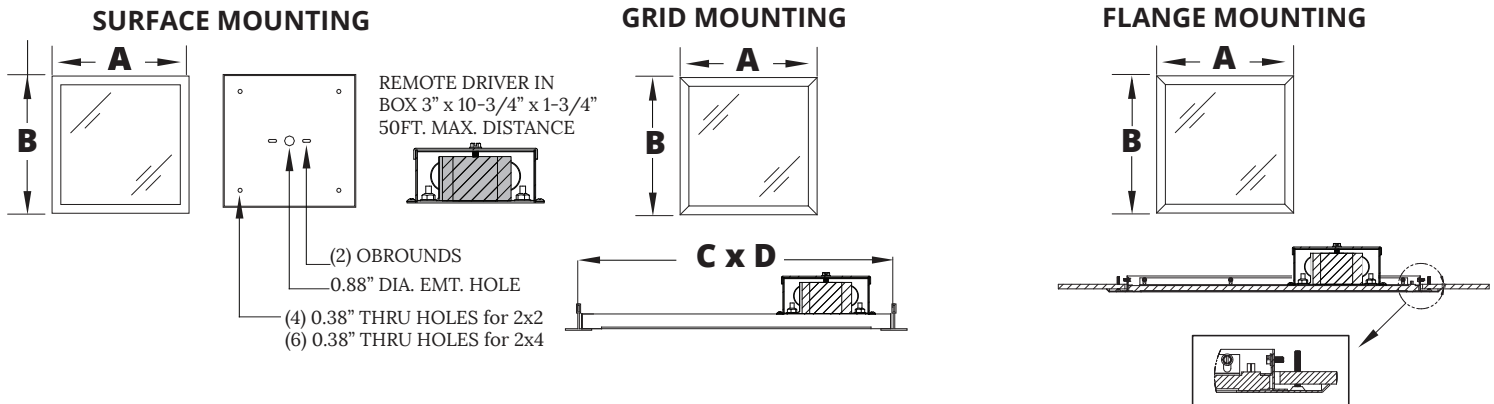

	A	B	C	D	Depth	Recommended Ceiling Cut-Out
AGS22	23.77"	23.77"	-	-	1.00"	N/A
AGS24	23.81"	47.93"	-	-	1.00"	N/A
AGG22	23.62"	23.62"	24"	24"	0.56"	N/A
AGG24	23.62"	47.62"	24"	48"	0.56"	N/A
AGF22	27.188"	27.188"	-	-	1.30"	24.188" x 24.188"
AGF24	50.813"	27.188"	-	-	1.30"	24.188" x 50.813"

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.

IMAGE SELECTION



RT = Red Flowers w Tree



PT = Palm Tree 1



WF = White Flower



P2 = Palm Tree 2



TE = Tree



BT = Blue Sky w Tree



B1 = Blue Sky 1



B2 = Blue Sky 2




WT = White Tree



WP = White Pink Tree



YO = Yellow Orange Tree



CI = Custom Image



vara kamin's
IMPRESSIONS OF LIGHT[®], INC.

VKI Images Available
See Website for Selection