

STARTILE MRI 22-24 LED

AGS22/AGS24/AGG22/AGG24/AGF22/AGF24

SPECIFICATION FEATURES

- HOUSING:** Fixture Frame White Extruded Aluminum. Non-ferrous material content. Surface fixtures have an aluminum back pan. Flange fixtures have an aluminum external frame.
- LENS:** Opal Polycarbonate lens standard.
- LED:** Available in four white color temperatures 3000°K, 3500°K, 4200°K and 5700°K. Other color temperatures available, consult factory. Standard 0-10V Meanwell dimming driver with 10-100% range.
- POWER SUPPLY:** LED Driver Included. Driver must be remote mount outside of MRI room (50ft. max). MRI room EMI filter required (supplied by others).
 Input Voltage: AC120V-277V
 AG22: Input Power 40.0W (must order Power Supply separately)
 AG24: Input Power 80.0W (must order Power Supply separately)



APPLICATION:

MRI Rooms.

MOUNTING:

Mounting screws are not provided.


LABEL:

Fixture is listed for UL Damp Location.



STARTILE MRI ORDERING INFORMATION

Ex: AGS24-MRI-OP-UN-35

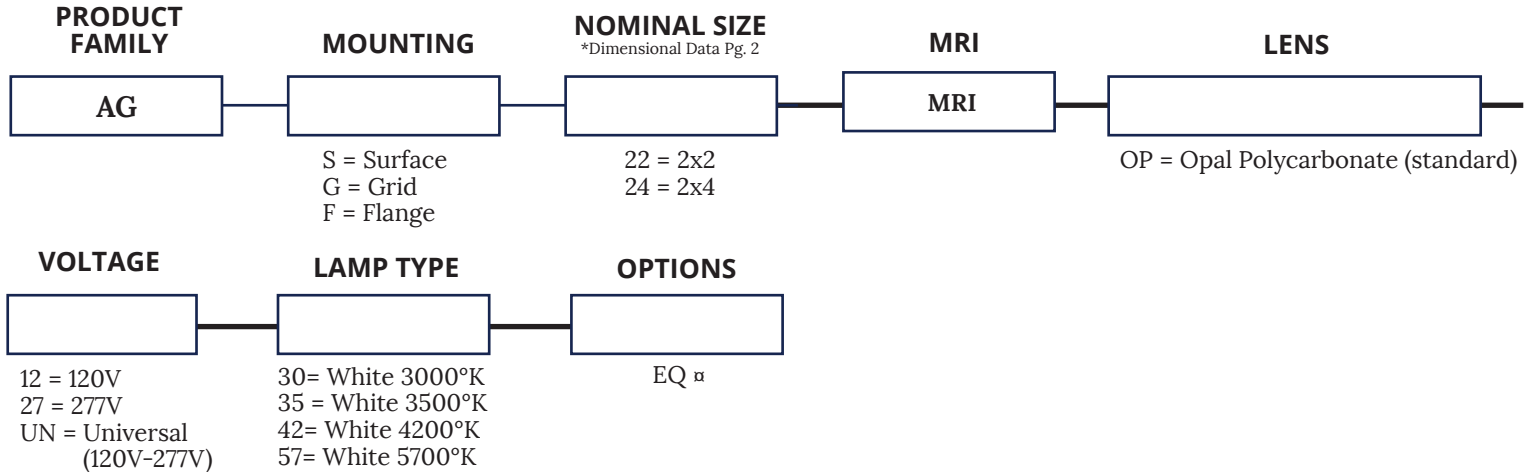


KEY

EQ = Earthquake Clips/Suspended mounting bracket clips π Can only be used with Grid

REMOTE POWER SUPPLY ORDERING INFORMATION

StarTile MRI fixtures supplied with LED Driver. Driver must be remote mount outside of MRI Room (50ft. max). One Driver inside one Box to power one fixture (maximum). Consult factory for additional options. MRI room EMI filter required (supplied by others). Note, each Power Supply requires individual Filter. Consult factory for additional Power Supply configurations.

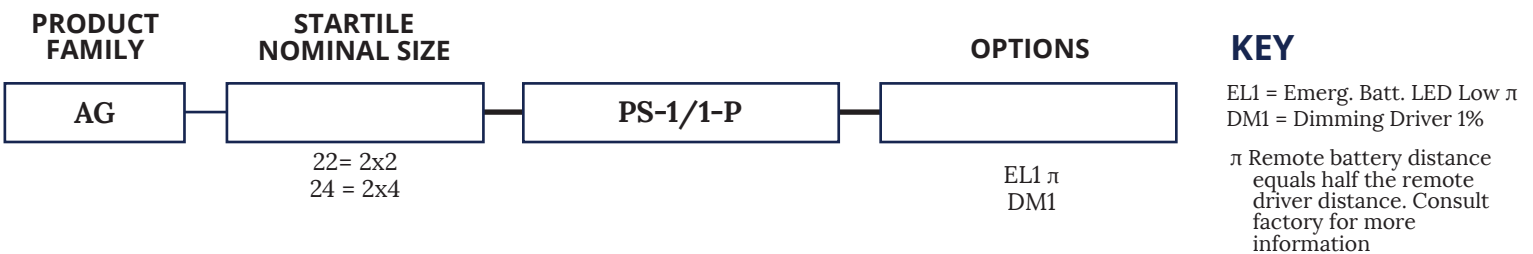


Notes:
 Image is a 2x4 StarTile
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.

STARTILE MRI 22-24 LED

AGS22/AGS24/AGG22/AGG24/AGF22/AGF24



DIMENSIONAL DATA

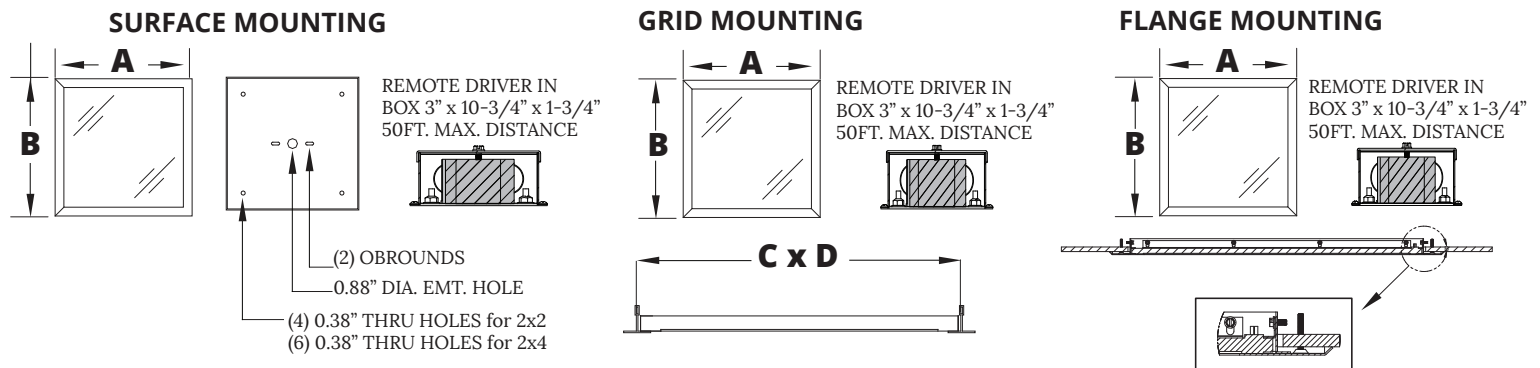

	A	B	C	D	Depth	Recommended Ceiling Cut-Out
AGS22	23.77"	23.77"	-	-	1.00"	N/A
AGS24	23.81"	47.93"	-	-	1.00"	N/A
AGG22	23.62"	23.62"	24"	24"	0.56"	N/A
AGG24	23.62"	47.62"	24"	48"	0.56"	N/A
AGF22	27.188"	27.188"	-	-	1.30"	24.188" x 24.188"
AGF24	50.813"	27.188"	-	-	1.30"	24.188" x 50.813"

PERFORMANCE DATA**

Model	Lamp Type	Lumens (Delivered)	Efficacy (lm/W)	Input Power (W)
AG22	3000°K	3840	96.3	40
	3500°K	3900	98	40
	4200°K	4000	98.7	40
	5700°K	4532	111.5	40
AG24	3000°K	6700	80.7	80
	3500°K	6850	81.7	80
	4200°K	7000	82.7	80
	5700°K	7900	93.4	80

Notes:
 **Performance Data subject to change without notice.
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.