

HEALTHCARE NIGHT LIGHT LED

HNLHH/HNLHL/HNLOF/HNLVH/HNLVL

SPECIFICATION FEATURES

FACEPLATE: Durable die cast aluminum material. Available with five different faceplates: Horizontal Hood, Horizontal Louver, Open Frame, Vertical Hood and Vertical Louver.

LED: Available in 3 color temperatures 3000°K, 4000°K and 5000°K.

ELECTRONICS: Integrated embedded Driver (3W).

FINISH: Antimicrobial White (Standard) or Custom Color.





APPLICATION: Patient Rooms, Surgical Suites, Medical Settings, Hallways, Foyers, Lobbies, and more.

LABEL: Fixture is certified to UL standards.



ORDERING INFORMATION

Ex: HNLHH-30-UN-OC-DM-AM

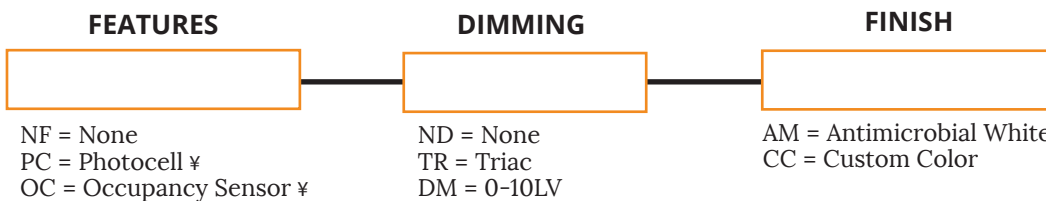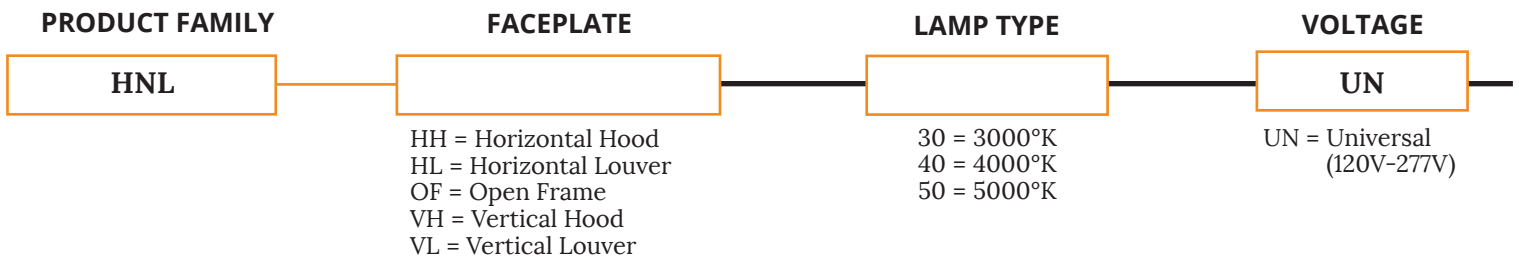

KEY


‡ Can only be used with HH and VH.
Cannot select Photocell and Occ Sensor together

HEALTHCARE NIGHT LIGHT LED

HNLHH/HNLHL/HNLOF/HNLVH/HNLVL



DIMENSIONAL DATA

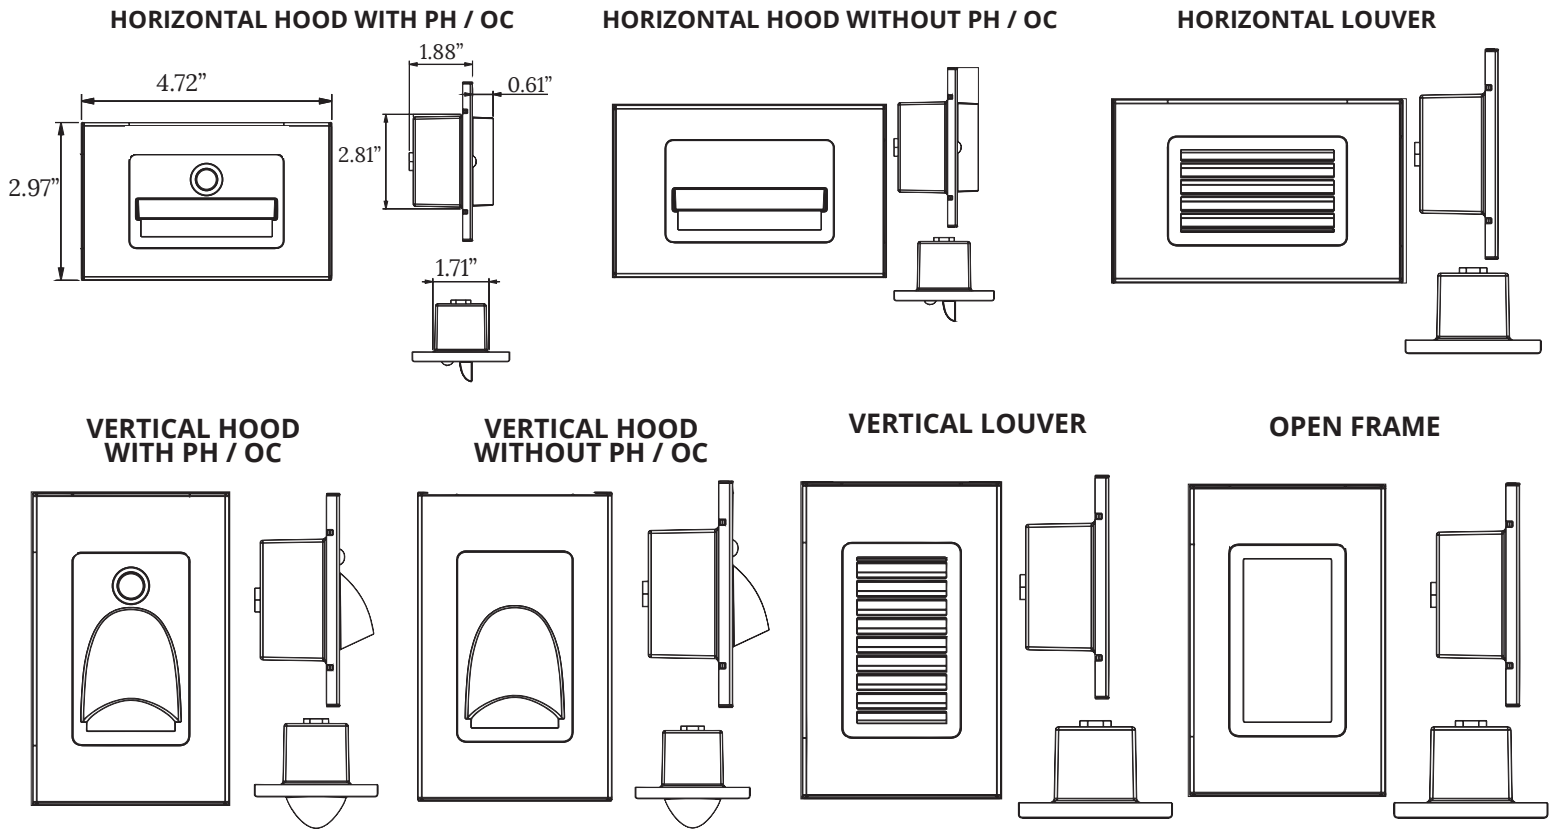

PERFORMANCE DATA**

MODEL	LAMP TYPE	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
HNL-OF	3000°K	250	66	3.8
	4000°K	240	63	3.8
	5000°K	253	67	3.8
HNL-VH	3000°K	92	24	3.8
	4000°K	82	22	3.8
	5000°K	95	25	3.8
HNL-VL	3000°K	124	33	3.8
	4000°K	114	30	3.8
	5000°K	127	33	3.8
HNL-HH	3000°K	130	34	3.8
	4000°K	120	32	3.8
	5000°K	133	35	3.8
HNL-HL	3000°K	124	33	3.8
	4000°K	114	30	3.8
	5000°K	127	33	3.8

Notes:
 Healthcare Night Lights have same dimensions regardless of faceplate
 **Subject to change without notice
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.