

Project:			
Гуре:			
Product:			

33 SERIES FLUORESCENT

SPECIFICATION FEATURES

HOUSING: Die formed, seam welded, and ground smooth cold rolled steel or stainless

steel non-clamshell design. Incorporates a removable reflector unitized with all electrical components for easy installation and maintenance.

FRAME: Die formed one-piece frame with tightly closed corners (material

and gauge to match housing).

HINGE: 16 gauge full length continuous, staked piano hinge with welded ends to

prevent removal (material to match housing).

LENS: Outer and Inner lens options secured by "Z" retainers with weld studs

spaced six inches apart for maximum strength.

ELECTRONICS: Electronic Ballast <10% THD standard. RIF available. Lamps by others.

FASTENERS: Tamper resistant countersunk flat head Torx screws with center pin reject.

FINISH: White powder coat finish following iron phosphate pre-treatment.

GASKET: Black neoprene gasket around door frame to prevent light leaks.



APPLICATION:

Minimum to Supermax Confinement, Psychiatric Wards, Public Housing, Detention Centers, Transportation, Athletic Facilities, and more.

MOUNTING:

Surface installation.


LABEL:

Fixture is certified to UL standards.



ORDERING INFORMATION

Ex: 33W2-A-2401-A/C-UN

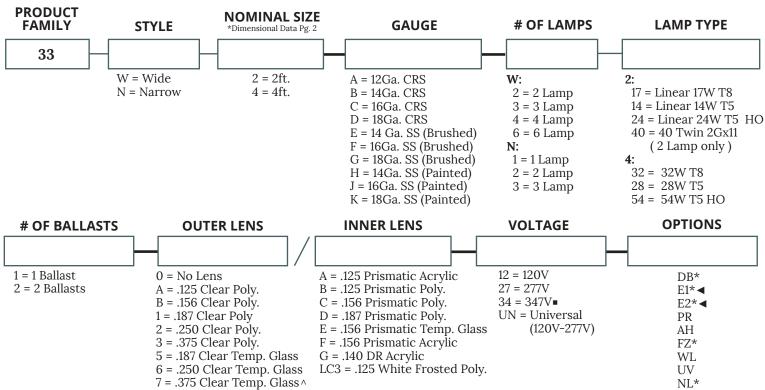

KEY

DB = Dimming Ballast (0-10V)* AH = Allenhead Scres with center pin reject E1 = Emerg. Ballast (450lm)* ◀ FZ = Fuse*

E2 = Emerg. Ballast (1350lm)*◀ WL = Wet Location

Notes: NL = Night Light*

Specifications and Dimensions are subject to change without notice.

For additional options and dimensional details please consult your New Star Lighting Representative.


- * Cannot use with UN voltage
- ^ Must use with 12Ga. or 14Ga. Frame
- **◄** Consult factory for T5 availability
- Consult factory for lamp-ballast options


33 SERIES FLUORESCENT




DIMENSIONAL DATA

WIDE (W)





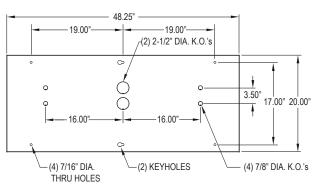

NARROW (N)

