

AURAMED 12-14 FLUORESCENT

AAS12/AAS14/AAG12/AAG14/AAF12/AAF14

SPECIFICATION FEATURES

- HOUSING:** 20 gauge formed cold rolled steel housing with continuous seam welds. Aluminum and stainless steel option available.
- FRAME:** Inset and overlapping doorframe available in aluminum, cold rolled steel, and stainless steel. Inset extruded door available in anodized aluminum or white painted aluminum. Frame held to housing via aircraft cable.
- LENS:** Clear acrylic lens with smooth side out. Clear polycarbonate lens options available.
- LAMP DIFFUSER:** Perforated metal screen painted white, and lined with .20" thick white acrylic diffuser.
- ELECTRONICS:** Electronic instant start ballast <10% THD standard. Lamps by others.
- FASTENERS:** Philips flat head screws with captive cage nuts.
- GASKET** Closed cell EPDM and closed cell silicone gaskets prevent air contaminations from entering the fixture.
- FINISH:** White antimicrobial powder coat finish following an iron phosphate pre-treatment.



APPLICATION:
Patient Rooms, Hospitals, Examination Rooms, Lobbies, Corridors, and more.


MOUNTING:
Surface, Grid and Flange installation options. Flange fixtures come with adjustable 90° swing arm for easy installation.

LABEL:
Fixture is certified to UL standards. Certified IP65, ISO4, NSF and Damp Location.



ORDERING INFORMATION

Ex: AAS12-HC/IA-2171C-E-UN

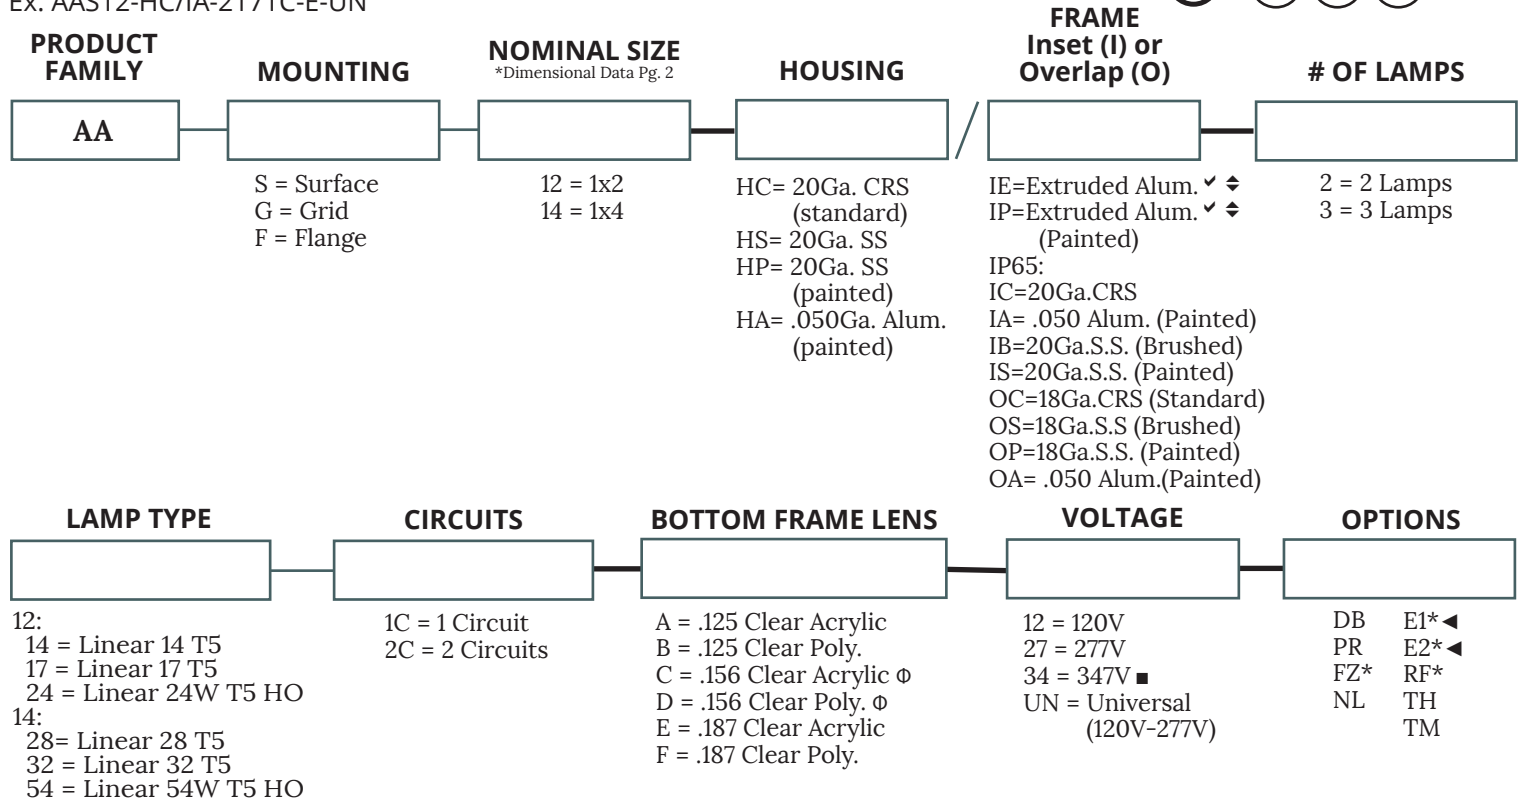

KEY

DB = Dimming Ballast (0-10V)*
PR = Program Rapid Start
FZ = Fuse*
NL = Fluorescent Night Light*

Notes:

Specifications and Dimensions are subject to change without notice.

For additional options and dimensional details please consult your New Star Lighting Representative.

E1 = Emerg. Batt. Pack (450 lm)* ◀
E2 = Emerg. Batt. Pack (1100 lm)* ◀
RF = (RIF) Radio Interference Filter*
TH = Torx Head Screws (w center pin)
TM = Tandem Mount

✓ Not IP65
* Cannot use with UN voltage
◀ Consult factory for T5 availability
■ Consult factory for lamp ballast options
◆ Must use with .156 Acrylic or Poly lens
◊ Can only be used with IE or IP



AURAMED 12-14 FLUORESCENT

AAS12/AAS14/AAG12/AAG14/AAF12/AAF14





DIMENSIONAL DATA

SURFACE MOUNTING



REMOVABLE COVER;
GASKETED TO
HOUSING WITH (2)
7/8" DIA. K.O.'S



12: (4) 7/16" DIA. THRU HOLES
14: (6) 7/16" DIA. THRU HOLES





OVERLAPPING FRAME

ALUMINUM EXTRUDED
INSET FRAME

GRID MOUNTING





7/8" DIA. K.O.





OVERLAPPING FRAME

ALUMINUM EXTRUDED
INSET FRAME

FLANGE MOUNTING



7/8" DIA. K.O.



OVERLAPPING FRAME

ALUMINUM EXTRUDED
INSET FRAME

| | A | B | C | Rec. Ceiling Cut-Out |
|-------|--------|-------|--------|----------------------|
| AAS12 | 12.00" | 3.94" | 24.07" | - |
| AAS14 | 12.00" | 3.94" | 48.07" | - |
| AAG12 | 11.69" | 3.94" | 24.20" | - |
| AAG14 | 11.69" | 3.94" | 48.07" | - |
| AAF12 | 13.13" | 3.94" | 25.25" | 24-3/8" x 12-3/8" |
| AAF14 | 13.13" | 3.94" | 49.13" | 48-3/8" x 12-3/8" |

Notes:

Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.