

LAMPA FLUORESCENT

LAM2/LAM4

SPECIFICATION FEATURES

- HOUSING:** Die formed, seam welded and ground smooth marine grade aluminum (standard).
- FRAME:** Die formed, seam welded and ground smooth frame available in aluminum (standard), stainless steel and cold rolled steel. Custom band options available, consult factory.
- LENS:** 1/8" thick white frosted polycarbonate diffuser.
- ELECTRONICS:** Electronic instant start ballast <10% THD standard. Lamps by others.
- REFLECTOR:** Die formed aluminum and removable for easy installation and maintenance.
- FASTENERS:** Tamper resistant countersink flat head Torx screws with center pin reject.
- FINISH:** Black PPG polyester textured paint or optional custom color.
- GASKET:** Black neoprene gasket around interior door frame to prevent water and dust infiltration.



APPLICATION:
Public Areas, MRI Rooms, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more.


MOUNTING:
Surface Wall Mount Installation.

LABEL:
Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Ex: LAM2-AL-1141C-LC3-UN-BK

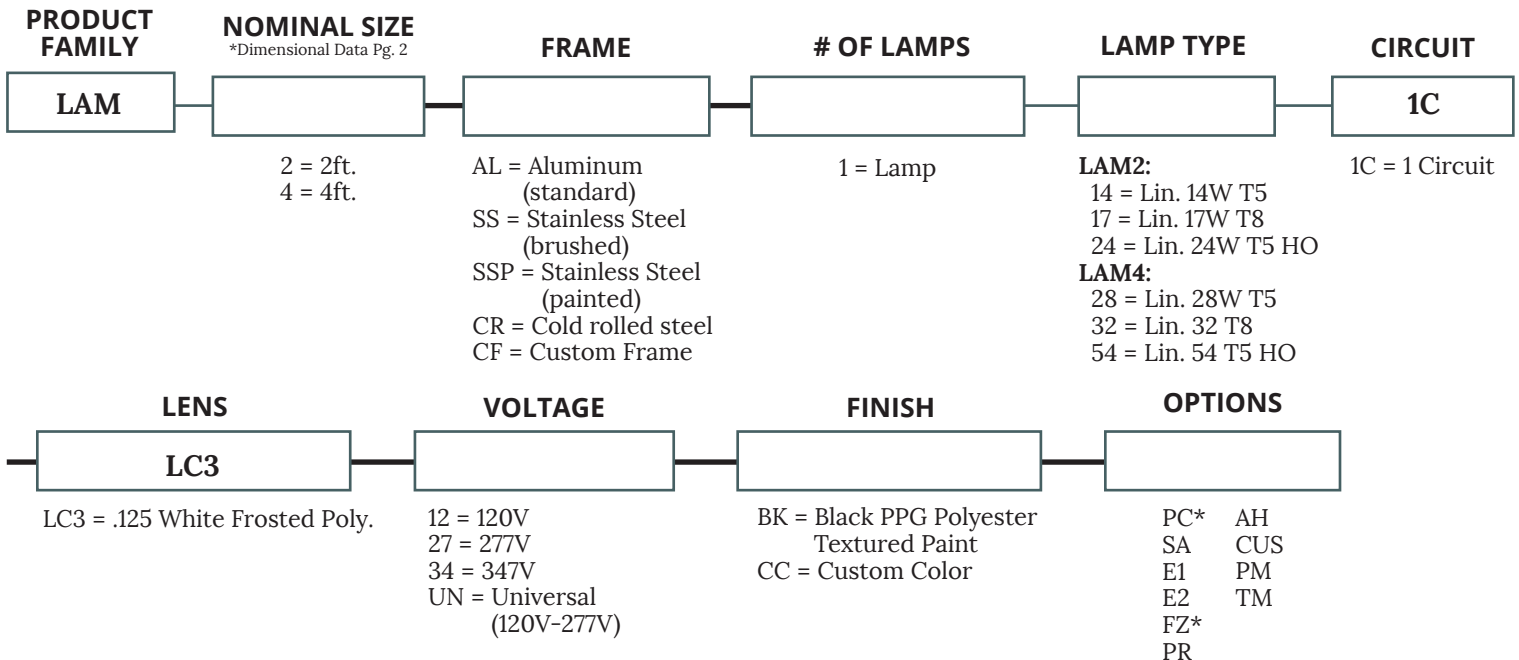

KEY

PC = Photocell (with SA only) *
SA = Surface Adapter (not ADA compliant)
E1 = Emerg. Battery Low* (with SA only)
E2 = Emerg. Battery High* (with SA only)
FZ = Fuse*
PR = Program Rapid Start Ballast

AH = Allen head screws with center pin reject
CUS = Custom band option, consult factory
PM = Pendant Mount
TM = Tandem Mount


* Cannot use with UN voltage

LAMPA FLUORESCENT

LAM2/LAM4



DIMENSIONAL DATA

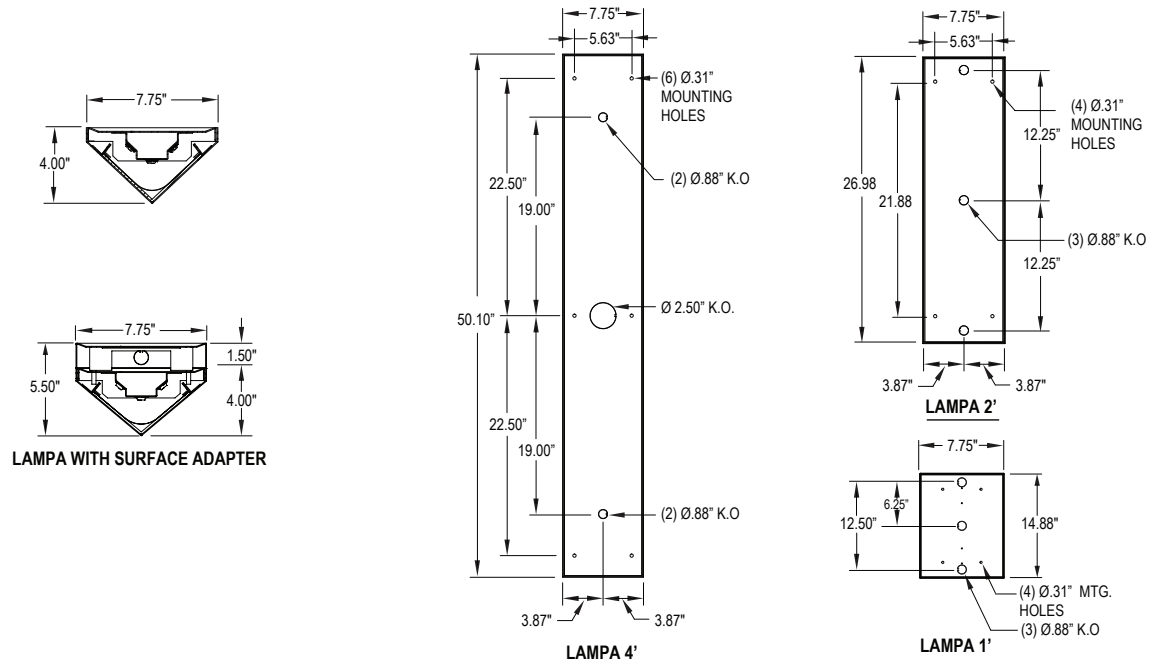

Notes:
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.