

NSO SERIES LED

NSOC/NSOV/NSOH/NSOO

SPECIFICATION FEATURES

- HOUSING:** One-piece, die casted aluminum.
- LENS:** Polycarbonate injection molded lens with radial prisms to provide superior illumination. Optional ribbed clear prismatic or ribbed opal lens.
- LED:** Available in three color temperatures 3500°K, 4000°K and 5000°K. 19.2W on 4 LED modules.
- REFLECTOR:** Aluminum reflector to serve as heat sink and unitized with electrical components.
- FASTENERS:** Tamper resistant Torx head screws with center pin reject.
- FINISH:** Extremely durable oven baked polyester powder coat following a 5 stage iron phosphate pre-treatment in black, bronze or white.
- GASKET:** One piece die cut black EDPM foam rubber with adhesive backing to affix to housing. Extruded and spliced EDPM ribbed rubber gasket for lens.



APPLICATION:

VR Architectural Settings, Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more.

MOUNTING:

J-Box knock out and level bar for quick and easy installation.


LABEL:

Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Ex: NSOOS-40-RC-UN-BK

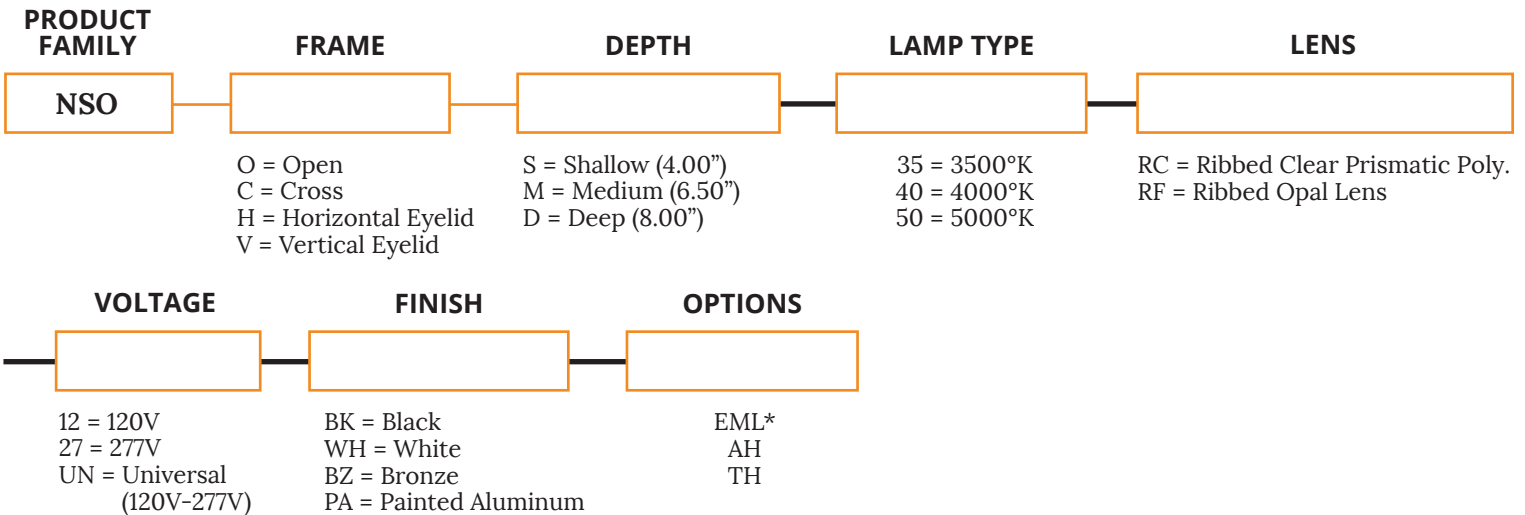

KEY

- EML = Emergency Battery (remote)*
AH = Allen Head Screws (with center pin)
TH = Torx Head Screws (with center pin)

*Cannot use with UN voltage



NSO CROSS (NSOC)



NSO VERTICAL EYE LID (NSOV)




NSO OPEN (NSOO)



NSO HORIZONTAL EYELID (NSOH)

Notes:
Specifications and Dimensions are subject to change without notice. If lamp type is not specified at time of quote or order, fixture will be set with 3500°K.
For additional options and dimensional details please consult your New Star Lighting Representative.

DIMENSIONAL DATA

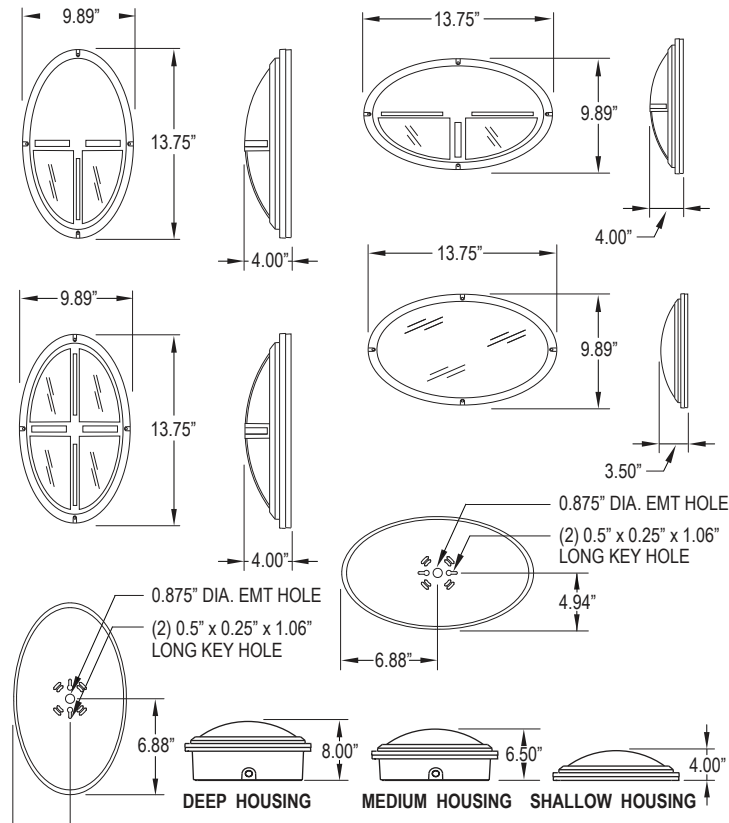

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.