

# LUDO FLUORESCENT NWLUD

## SPECIFICATION FEATURES

- HOUSING:** Die cast, one-piece marine grade aluminum.
- LENS:** UV stabilized white opal polycarbonate.
- ELECTRONICS:** Electronic ballast <10% THD standard.
- REFLECTOR:** .40" thick white aluminum for high reflectivity serves as heat sink and unitized with electrical components.
- FASTENERS:** Allen head screws (without center pin) standard.
- FINISH:** Extremely durable oven baked polyester powder coat following a 5 stage iron phosphate pre-treatment in black or white.
- GASKET:** An injection molded, continuous piece silicone rubber gasket to prevent infiltration.



### APPLICATION:

VR Architectural Settings, Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more.

### MOUNTING:

Surface wall mount installation.

### LABEL:

Fixture is certified to UL standards by Intertek Testing Laboratories.

## ORDERING INFORMATION

Ex: NWLUD-1-12-BK



PRODUCT FAMILY	LAMP TYPE	VOLTAGE	FINISH	OPTIONS
NWLUD				
	1 = 1 Lamp	12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	BK = Black WH = White	EM* TH
	2 = 2 Lamp			
	SBL = Self Ballast lamp (Max. 26W lamp)			
	7TW = 7W Twin G-23	7TW = 7W Twin G-23		
	9TW = 9W Twin G-23	9TW = 9W Twin G-23		
	13TW = 13W Twin Gx23	13TW = 13W Twin Gx23		
	13E = 13W Twin 2Gx7	13E = 13W Twin 2Gx7		
	13 = 13W Triple Gx24q-1	13 = 13W Triple Gx24q-1		
	13Q = 13W Quad G24q-1	13Q = 13W Quad G24q-1		
	18 = 18W Triple Gx24q-2	18 = 18W Triple Gx24q-2		
	18Q = 18W Quad G24q-2	18Q = 18W Quad G24q-2		
	26 = 26W Triple Gx24q-3	26 = 26W Triple Gx24q-3		
	26Q = 26W Quad G24q-3	26Q = 26W Quad G24q-3		
	32 = 32W Triple Gx24q-3			
	42 = 42W Triple Gx24q-4			


### KEY

EM = Emergency Ballast\* (remote mount)

TH = Torx Head Screws

\*Cannot use with UN voltage

## DIMENSIONAL DATA

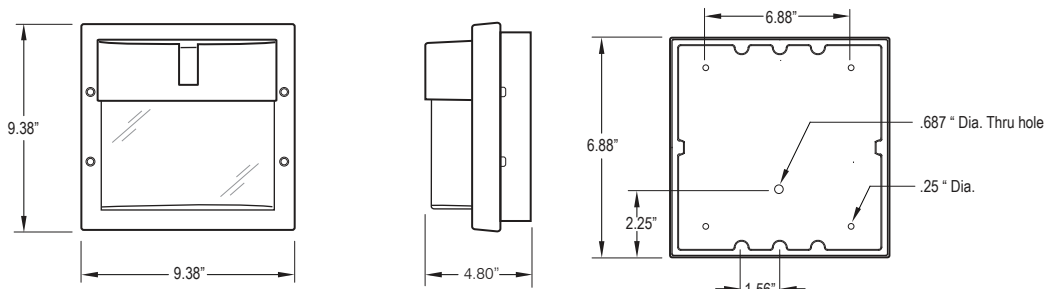

Notes:  
Specifications and Dimensions are subject to change without notice.  
For additional options and dimensional details please consult your New Star Lighting Representative.