

TRIO LED NWTRI

SPECIFICATION FEATURES

- HOUSING:** One-piece marine grade die-cast aluminum.
- LENS:** UV stabilized white opal polycarbonate.
- ELECTRONICS:** Electronic ballast <10% THD standard.
- REFLECTOR:** Aluminum reflector to serve as heat sink and unitized with electrical components.
- FASTENERS:** Allen head screws (without center pin) standard.
- FINISH:** Extremely durable oven baked polyester powder coat following a 5 stage iron phosphate pre-treatment in black or white.
- GASKET:** Injection molded, continuous piece silicone rubber gasket to prevent infiltration.



APPLICATION:

VR Architectural Settings, Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more.

MOUNTING:

Surface wall installation.

LABEL:

Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Ex: NWTRI-1-9TW-UN-BK


PRODUCT FAMILY	# OF LAMPS	LAMP TYPE	VOLTAGE	FINISH	OPTIONS	
NWTRI	1 = 1 Lamp 2 = 2 Lamps	Selected 1 Lamp: 7TW = 7W Twin G-23 9TW = 9W Twin G-23 13TW = 13W Twin Gx23 13E = 13W Twin 2Gx7 13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3 32 = 32W Triple Gx24q-3 42 = 42W Triple Gx24q-4	Selected 2 Lamps: 7TW = 7W Twin G-23 9TW = 9W Twin G-23 13TW = 13W Twin Gx23 13E = 13W Twin 2Gx7 13 = 13W Triple Gx24q-1 13Q = 13W Quad G24q-1 18 = 18W Triple Gx24q-2 18Q = 18W Quad G24q-2 26 = 26W Triple Gx24q-3 26Q = 26W Quad G24q-3	12 = 120V 27 = 277V UN = Universal (120V-277V)	BK = Black WH = White BZ = Bronze PA = Painted Aluminum	EM* TH

KEY

EM = Emergency Ballast (remote)*
TH = Torx Head Screws (with center pin)

*Cannot use with UN voltage

DIMENSIONAL DATA

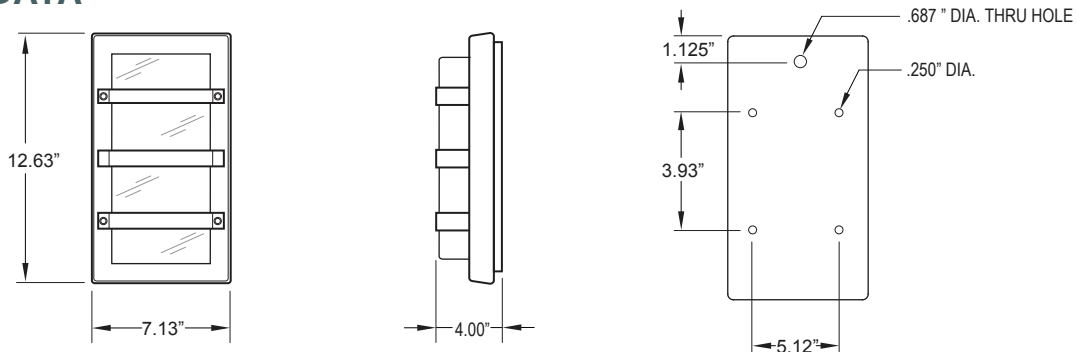

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.