

XP TRI-PROOF LED

XP-PL3040

SPECIFICATION FEATURES

HOUSING: Silver, slim, and modern 4ft. design with strong anti-corrosion PVC housing. No internal access required.

LENS: Frosted Acrylic lens for maximum light uniformity.

ELECTRICAL: Long life LED system available in 4000°K (standard), 80 CRI. Universal driver (120V-277V). 5600 lumen output (40W).

GASKET: High-density silicon rubber sealing ring protection to prevent light leaks.

NOTE: -20°C and 45°C operating temperature.



APPLICATIONS: Commercial Settings, Schools, Warehouses, Offices, Medical, Transportation Settings, and more.

MOUNTING: Surface or Suspended installation (supplied by others) with stainless steel mounting clips.




LABEL: Fixture is certified to UL standards. Certified IP65 and wet location.

ORDERING INFORMATION

SERIES
XP-PL3040



DIMENSIONAL DATA

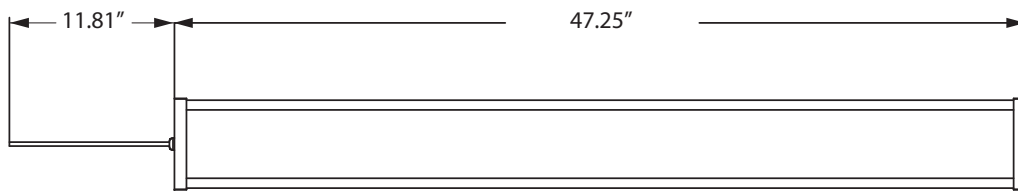

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting