

CORRECTIONAL INDUSTRY



With over 30 years of experience in the correctional industry, New Star Lighting offers an extensive line of luminaires built to withstand the highest levels of abuse while providing safe and proper illumination levels. These fixtures come in a variety of gauges, lensing options and styles that are ideal for Minimum security to Super-Maximum security facilities.

DENTON COUNTY JAIL - TEXAS.
PHOTO CREDIT: HDR INC.

APPLICATIONS:

- Cells
- Corridors
- Dayrooms
- Office Space
- Sally Ports
- Kitchens
- Recreation Areas
- Exteriors
- Behavioral Settings
- Psychiatric Wards
- Detention Centers
- Public Housing and more.



www.newstarlighting.com

2225 West Pershing Rd.
Chicago, Illinois 60609
773.847.1400

HOUSING GAUGE

Die formed, seam welded and ground smooth housing to prevent contraband concealment. Available in cold rolled steel or stainless-steel.



33LN4

FASTENERS


Assortment of correctional fasteners to prevent unauthorized access into fixtures including Tamperproof Torx Head, Allen Head, and Breakaway Screws.

LENSING THICKNESS

Impact resistant lensing offered in polycarbonate or tempered glass in various thicknesses to withstand high levels of abuse.

LED LAMP TYPE

Long lasting LEDs available in 3500°K, 4000°K, 5000°K to suit a wide variety of applications with an optional dimming function.

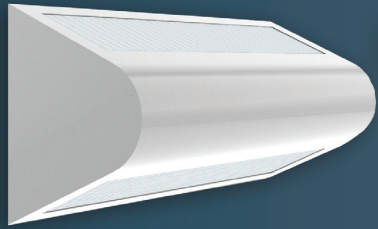


RUD

- Cold rolled steel or stainless steel clamshell design prevents unauthorized entry
- Up/Down light distribution
- Rounded housing shape designed to withstand physical abuse
- Lumen packages: 1400 to 11000



STARTILE MX

- StarTile encased in a 14 gauge cold rolled steel frame with beveled edges to deflect the force of an impact.
- Two lenses provide maximum durability
- Lumen packages: 1500 to 7900

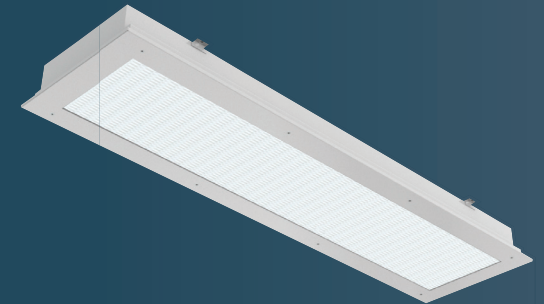

37M

- Flange fixture is designed for application in recessed drywall ceiling with a low-profile energy and material saving design.
- 16 gauge full length continuous, staked piano hinge, with welded ends to prevent removal
- Lumen packages: 2500 to 8300