

# CLEANROOM EXIT SIGN LED

## ESCR

### SPECIFICATION FEATURES

**HOUSING:** 20 gauge formed cold rolled steel housing with continuous seam welds (standard). Optional 20 gauge brushed stainless steel housing.

**FRAME:** Overlapping doorframe in 18 gauge cold rolled steel or 18 gauge brushed stainless steel.

**LENS:** .125 clear polycarbonate lens (standard).

**ELECTRONICS:** Long life LED system illuminates red or green legend. Single face. 6.5W.

**FASTENERS:** Stainless steel Philips flat head screws with captive cage nuts. Finish to match housing.

**FINISH:** White antimicrobial powder coat finish following multistage iron phosphate pre-treatment.

**GASKET:** Closed cell EPDM and closed cell silicone gaskets prevent air contaminations from entering the fixture.



**APPLICATIONS:** Cleanrooms, Hospitals, Hi-Tech Manufacturing, Laboratory, Food Processing Facilities, Commercial Kitchens, and more.

**MOUNTING:** Recessed installation.

**LABEL:** Fixture is certified to UL standards by Intertek Testing Laboratory.






### ORDERING INFORMATION

Example: ESCR-HC/OC-SF-LED-UN-RW

SERIES	MOUNTING	HOUSING	OVERLAP FRAME	FACE	LAMP TYPE
ESC	R			SF	LED
	R = Recessed	HC = 20Ga. CRS Painted HS = 20Ga. SS Brushed	OC = 18Ga. CRS Painted OS = 18Ga. SS Brushed	SF = Single Face	LED = LED Modul

VOLTAGE	LETTERING	OPTIONS
12 = 120V 27 = 277V UN = Universal (120V-277V)	RW = Red Letters GW = Green Letters	EM = Emergency Battery

### DIMENSIONAL DATA

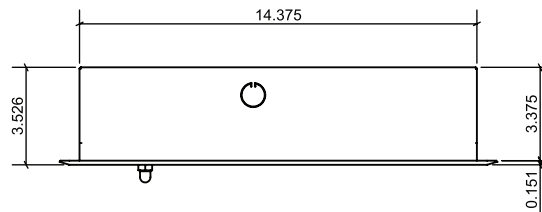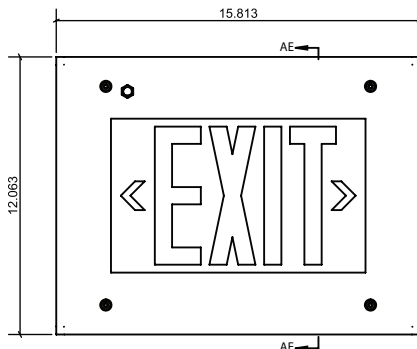

Notes:  
Specifications and Dimensions are subject to change without notice.  
For additional options and dimensional details please consult your New Star Lighting