

MRI STARMED MUS UNDERCABINET LED

MUS2/MUS3/MUS4

SPECIFICATION FEATURES

HOUSING: Aluminum housing with continuous seam welds. Non-ferrous material content for MRI compatibility.

LENS: .125 prismatic acrylic lens.

LED: Available in three color temperatures 3000K, 3500K, and 4000K. Other color temperatures available, consult factory. Dimming options available on Power Supply Box.

FINISH: White antimicrobial powder coat finish following multistage iron phosphate pre-treatment.

INSTALLATION: Keyhole slots for easy installation. Mounting screws are not provided.

POWER ENCLOSURE: LED driver included - must be remote mount. Must order Power Enclosure separately. If using a separately sourced Power Supply Box (by others) the drivers need to be mounted 2" apart. Consult factory for more information. MRI room EMI filter required, supplied by others.



APPLICATIONS: MRI Rooms.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Example: MUS2-MRI-HA-L130-A-UN


SERIES	SIZE*	MRI	HOUSING	LUMEN OUTPUT*	COLOR TEMP.
MUS	2 = 2ft. 3 = 3ft. 4 = 4ft. *Nominal Size Dimensional Data on Page 2.	MRI = Remote Driver. Remote Power Supply, ordered separately. Requires proper filter components supplied by others. Consult factory for additional information.	HA = 16Ga. Alum. Painted	MUS2: L1 = 1250lm (12W) MUS3: L1 = 1875lm (18W) MUS4: L1 = 2500lm (25W) *Subject to change. Data on Page 2.	30 = 3000K 35 = 3500K 40 = 4000K

LENS	VOLTAGE	OPTIONS
A = .125 Prismatic Acrylic	12 = 120V	90C = 90 CRI
LC3 = .125 White Frosted Poly.	27 = 277V 34 = 347V UN = Universal (120V-277V)	


Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.

DIMENSIONAL DATA


MUS2

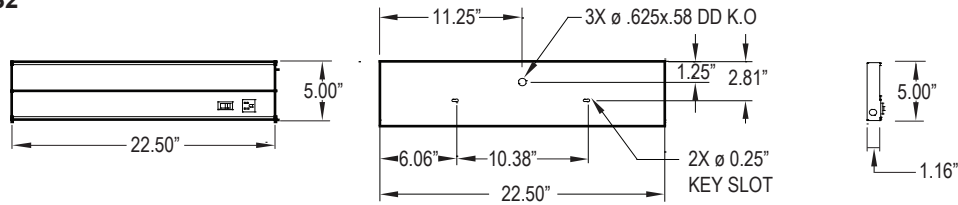

MUS3

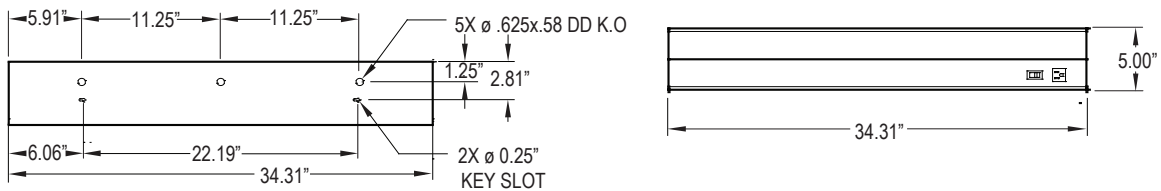

MUS4

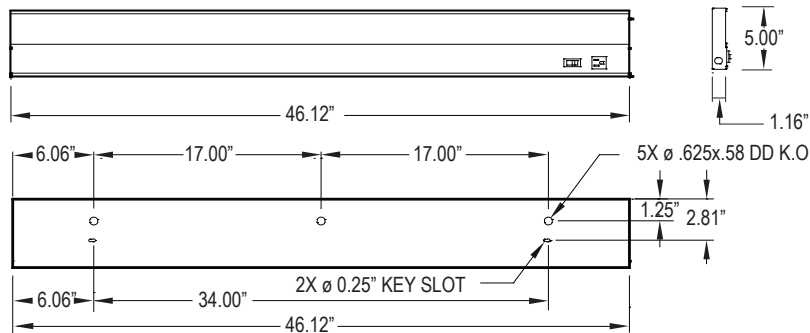

POWER ENCLOSURE ORDERING INFORMATION

Power enclosure must be installed outside of the MRI room. MRI room EMI filters required (supplied by others). Custom configurations available for Power Enclosure when using multiple fixtures per driver. Consult factory for configurations. Configurations must be determined at time of order.

Example: MUS4-PS-1/1-P-UN-DM1

SERIES	SIZE	VOLTAGE	OPTIONS
MUS	PS-1/1-P		

2 = 2ft.

3 = 3ft.

4 = 4ft.

UN = Universal
(120V-277V)

DM1 = 0-10V dimming with 1-100% range

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.