


# 33M LED SERIES

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_

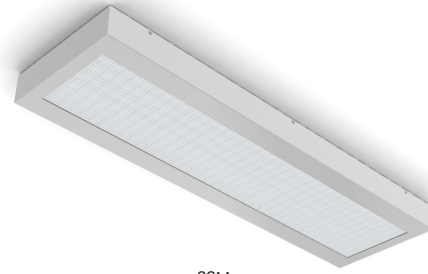

33M

## PRODUCT FEATURES

- Intended for Minimum to Supermax Correctional Facilities, Detention Centers, and more
- Available in 2ft and 4ft wide and narrow clamshell housing with contraband drop slot between ceiling and back of luminaire
- Inner and outer lens secured by "Z" bracket retention system with 6" stud spacing for maximum strength
- This product is Made in America and complies with the Buy American Act requirements

## ORDERING INFORMATION

Example: 33MW2-A-L2401-A/C-UN



33						
Series	Style W = Wide N = Narrow	Size 2 = 2ft 4 = 4ft  *Nominal Size. Dimensional Data on Page 2.	Housing A = 12Ga. CRS Painted B = 14Ga. CRS Painted C = 16Ga. CRS Painted D = 18Ga. CRS Painted E = 14Ga. SS Brushed F = 16Ga. SS Brushed G = 18Ga. SS Brushed H = 14Ga. SS Painted J = 16Ga. SS Painted K = 18Ga. SS Painted	Lumen Output* 33MN: L2 = Standard CL = Custom Lumen Output** 33MW: L1 = Low L2 = Standard L3 = High CL = Custom Lumen Output**  *Subject to change. Performance Data on Page 3. **Must be specified at time of quote. Must not exceed fixture maximum output. Must specify "DMI" if selecting dimming.	Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K  TW1 = Tunable White 2700K to 5000K* TW2 = Tunable White 2700K to 6000K*  *Specify TW Driver under Options.	Circuits 1 = 1 Circuit 2 = 2 Circuits*  *Refers to In-board/Outboard control. N/A with L1. Recommended to be used with 4ft.
<b>Outer Lens</b> 0 = No Lens A = .125 Clear Poly. B = .156 Clear Poly. 1 = .187 Clear Poly. 2 = .250 Clear Poly. 3 = .375 Clear Poly. 5 = .187 Clear Temp. Glass 6 = .250 Clear Temp. Glass 7 = .375 Clear Temp. Glass*  *Must use with 12Ga. or 14Ga. frame		<b>Inner Lens</b> A = .125 Prismatic Acrylic B = .125 Prismatic Poly. C = .156 Prismatic Poly. D = .187 Prismatic Poly. F = .156 Prismatic Acrylic G = .140 DR Acrylic LC3 = .125 White Frosted Poly.		<b>Voltage</b> 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V - 277V)	<b>Options</b> FZ = Fuse* LN = LED Night Light* EL1 = Emerg. Battery LED 10W (Remote)** EL2 = Emerg. Battery LED 20W (Remote)** UV = .005 UV Absorbing Overlay AH = Allen head screws DM = 0-10V dimming with 10-100% range <b>TW Drivers:</b> DALI8 = DALI Type 8 (One DALI Address) TWO = 2-Channel 0-10V dimming (Brightness & CCT)  *Cannot be used with UN voltage. 3500K. Non-dimming. Integrated switch allows light levels at 100%, 70%, 40% and 10% levels. **Remote. Field installation required. If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.	



**New Star Lighting**  
 2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

## SPECIFICATIONS

**HOUSING:** Die-formed, seam welded, and ground smooth cold rolled steel or stainless steel clamshell design. Incorporates a removable reflector unitized with all electrical components for easy installation and maintenance. Clamshell design incorporates a contraband drop slot gap between the ceiling and back of fixture.

**BACKPLATE:** Die-formed with contraband drop slot and embossed mounting holes (material to match housing). Security caulking between ceiling and fixture is not required with this backplate design.

**HINGE:** 16-Gauge full length continuous, staked piano hinge with welded ends to prevent removal (material to match housing).

**LENS:** Outer and Inner lens options secured by "Z" retainers with weld studs spaced six inches apart for maximum strength.

**LED:** Available in three color temperatures 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature, compliant with IES LM-80 testing standards.

**ELECTRICAL:** 120-277VAC or 347VAC, 50/60HZ electrical input high power factor electronic, constant current driver (<20% THD, >0.9 PF). Standard 0-10V driver provided. Optional dimming function (DM) with 10-100% range.

### OPTIONAL TW DRIVERS:

**DALI8** - DALI Type 8 (One DALI Address)

**TWO** - Two channel 0-10V dimming: one channel for brightness, one channel for CCT

**FASTENERS:** Tamper-resistant Torx® head fasteners.

**FINISH:** White powder coat finish following multi-stage iron phosphate pretreatment.

**GASKET:** Black neoprene gasket around door frame to prevent light leaks.

**MOUNTING:** Surface installation.

**LABEL:** Fixture is certified to UL standards for Wet Locations. This product is Made in America and complies with the Buy American Act (BAA).




The 33M LED Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse\*.

\*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.

## DIMENSIONAL DATA

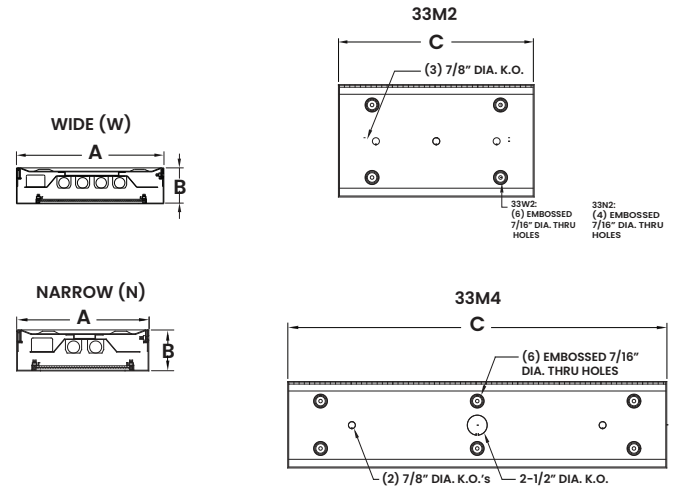

	A	B	C
<b>33MN2</b>	11"	3.38"	24.62"
<b>33MN4</b>	11"	3.38"	48.5"
<b>33MW2</b>	14"	3.38"	24.6"
<b>33MW4</b>	14"	3.38"	48.5"

## PERFORMANCE DATA

\*Data is with 80 CRI chip at 4000K. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (W)
33MN2	L2 = Standard	3500K	2875	115	25
		4000K	3000	120	25
		5000K	3125	125	25
33MN4	L2 = Standard	3500K	5750	115	50
		4000K	6000	120	50
		5000K	6250	125	50
33MW2	L1 = Low	3500K	1438	115	12.5
		4000K	1500	120	12.5
		5000K	1563	125	12.5
	L2 = Standard	3500K	2875	115	25
		4000K	3000	120	25
		5000K	3125	125	25
	L3 = High	3500K	4180	110	38
		4000K	4370	115	38
		5000K	4560	120	38
33MW4	L1 = Low	3500K	2875	115	25
		4000K	3000	120	25
		5000K	3125	125	25
	L2 = Standard	3500K	5750	115	50
		4000K	6000	120	50
		5000K	6250	125	50
	L3 = High	3500K	8250	110	75
		4000K	8625	115	75
		5000K	9000	120	75



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.