


51HD SERIES: QUICK SHIP

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

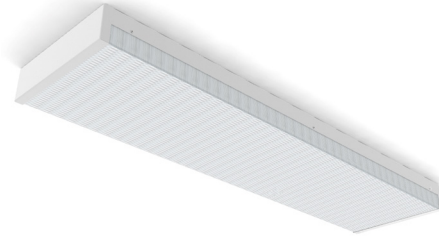

51HD

PRODUCT FEATURES

- Intended for Apartment Buildings, School Campuses, Public Housing Complexes, Transportation Terminals, Utility Corridors, Hotels, Locker Rooms, and more
- 10 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Surface mount installation
- This product was Made in America and complies with the Buy American Act requirements

ORDERING INFORMATION

Example: 51HD4-L2351C-B-12-QS



51HD4				
Series	Lumen Output* L2 = Standard L4 = High *Subject to change. Performance Data on Page 3.	Color Temp. 35 = 3500K 40 = 4000K	Circuits 1C = 1 Circuit 2C = 2 Circuits* *Refers to inboard/outboard wiring	Lens B = .125 Prismatic Poly. C = .156 Prismatic Poly. D = .187 Prismatic Poly.

		QS
Voltage 12 = 120V 27 = 277V UN = Universal (120V-277V)	Options FZ1 = Fuse (120V) FZ2 = Fuse (277V) EL1 = Emergency Battery LED Low (1100-1250lm)* EL2 = Emergency Battery LED Low (1900-2000lm)* WL = Wet Location (Covered Ceiling Only) AH = Allen Head Screw with Center Pin AM = Antimicrobial Paint SD2 = Step Dim. Module (50-100%) SD3 = Step Dim. Module (30-70-100%) WP = 6ft. Flex Whip. Supply wires included only otherwise specified	Quick Ship QS = Quick Ship



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

SPECIFICATIONS

Housing: 16-Gauge cold rolled steel internally reinforced to provide double wall thickness at ends and corners.

LENS: .125" Clear prismatic UV-stabilized polycarbonate diffuser.

LED: Available in three color temperatures: 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory.

ELECTRICAL: 0-10V dimming available with 1-100% range.

REFLECTOR: Cold rolled steel, removable and unitized with all electrical components for easy installation and maintenance.

FASTENERS: Tamper resistant Torx® head fasteners with center pin reject.



FINISH: White powder coat finish following multistage iron phosphate pre-treatment.

WARRANTY: New Star Promise.

INSTALLATION: Surface installation. Hardware by others.

LABEL: Fixture is certified to UL standards for Damp Locations.

DIMENSIONAL DATA

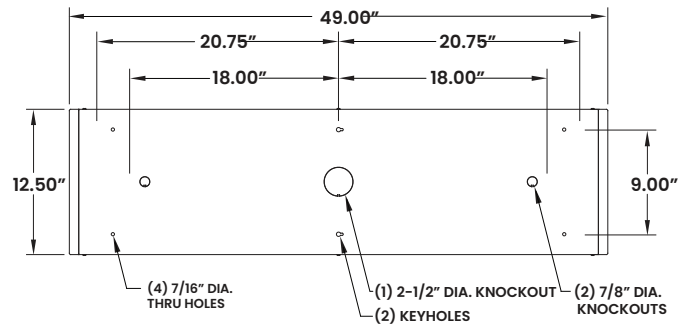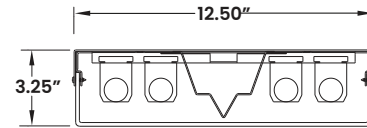

The 51HD Quicks Ship Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal-Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse*.

*Damage caused by gunfire and chemical reactions is not covered by the New Star Promise.

51HD SERIES: QUICK SHIP

PERFORMANCE DATA

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
51HD4	L2 = Low	4000K	5500	110	50
	L4 = High	4000K	11000	110	100



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.