

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____



ESCS Series

PRODUCT FEATURES

- Intended for Cleanrooms, Hospitals, Hi-Tech Manufacturing, Laboratory, Food Processing Facilities, Commercial Kitchens, and more
- Ceiling or wall surface mount installation
- Red or green legend, optional single or double face
- Fixture is certified to UL standards by Intertek Testing Laboratory. IP65 rated per IEC60598. ISO Class 4 (Fed Std. 209E/ Class 10), UL924
- This product is Made in America and complies with the Buy American Act requirements

ORDERING INFORMATION

Example: ESCS-HC/IC-SF-LED-UN-RW



ECS	S				
Series	Mounting S = Surface	Housing HC = 20Ga. CRS Painted HS = 20Ga. SS Brushed	Inset Frame IC = 20Ga. CRS Painted IB = 20Ga. SS Brushed	Face SF = Single Face DF = Double Face	Lamp Type LED = LED Module
Voltage 12 = 120V 27 = 277V UN = Universal (120V-277V)		Lettering RW = Red Letters GW = Green Letters	Options EM = Emergency Battery*		
			*If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.		



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2024, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

SPECIFICATIONS

CONSTRUCTION: 20-Gauge formed cold rolled steel or brushed stainless steel housing with continuous seam welds.

FRAME: Inset doorframe in 20-gauge cold rolled steel or 20-gauge brushed stainless steel.

LENS: .125 clear polycarbonate lens.

ELECTRICAL: Long life LED system illuminates Red or Green legend. Optional single face or double face. 7W.

FASTENERS: Stainless steel Phillips flathead fasteners with captive cage nuts. Finish to match doorframe.

LEGENDS: Legend illuminated by internal high output LEDs. Lettering 6" high with .750" stroke. Polycarbonate red or green filter panel. Field selectable chevron inserts.

FINISH: White antimicrobial powder coat finish following multi-stage iron phosphate pre-treatment.


GASKET: Closed cell EPDM and closed cell silicone gaskets prevent air contaminations from entering the fixture.

INSTALLATION: Ceiling or wall surface mount installation.


WARRANTY: Limited five (5) year warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory. IP65 rated per IEC60598. ISO Class 4 (Fed Std. 209E/ Class 10), UL924. This product is Made in America and complies with the Buy American Act (BAA).

SINGLE FACE

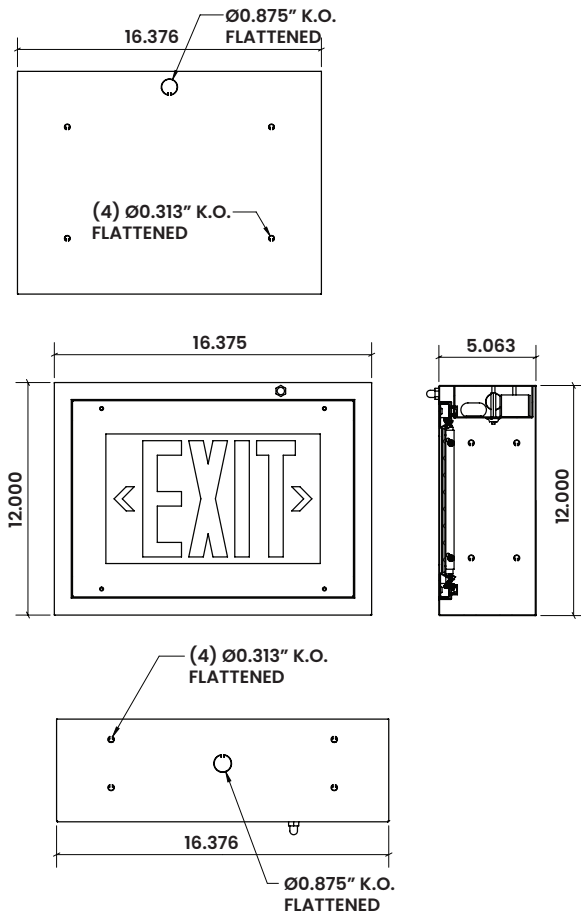

DOUBLE FACE

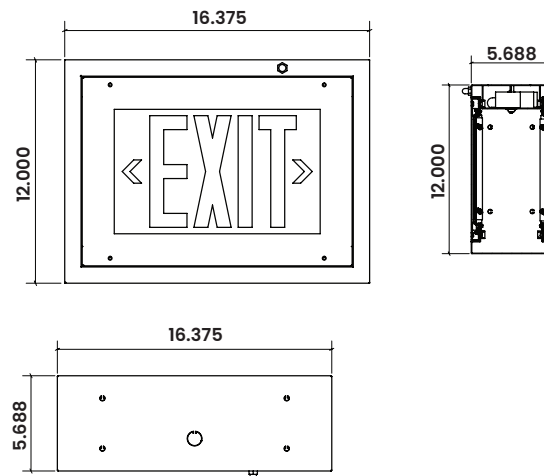

DIMENSIONAL DATA



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2024, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.