

STARMED™ MUS UNDERCABINET SERIES: QUICK SHIP

PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for Task Lighting, Patient Rooms, Nurse Stations, Medical Offices, Research Facilities, Laboratories, and more
- 10 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Available in two sizes: 2ft and 4ft
- Easy installation with keyhole slots
- White antimicrobial finish standard
- Fixture is certified to UL standard by Intertek Testing Laboratory for Damp Locations
- This product is Made in America and complies with the Buy American Act, and the Build America, Buy America Act



MUS Quick Ship Series

ORDERING INFORMATION

Example: MUS2-HC-L135-A-UN-DM-QS



MUS		HC	L1	
Series	Size* 2 = 2ft 4 = 4ft *Nominal Size. Dimensional Data on Page 2.	Housing HC = 20Ga. CRS Painted	Lumen Output* L1 = Standard *Subject to change. Performance data on Page 3.	Color Temp. 35 = 3500K 40 = 4000K
A	UN			QS
Lens A = .125 Prismatic Acrylic	Voltage UN = Universal (120V-277V)	Options DM = 0-10V dimming with 10-100% range		QS = Quick Ship



New Star Lighting
 2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

STARMED™ MUS UNDERCABINET SERIES: QUICK SHIP

SPECIFICATIONS

HOUSING: 20-Gauge formed cold rolled steel housing with continuous seam welds and ground smooth.

LENS: .125" prismatic acrylic lens.

LED: Available in two color temperatures 3500K and 4000K with maximum 3-step MacAdam variation allowance. Other color temperatures available in standard offering. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature, compliant with IES LM-80 testing standards.


ELECTRICAL: 120/277VAC standard integral 0-10V dimming driver available with 10-100% range.

FINISH: White antimicrobial powder coat finish following multi-stage iron phosphate pretreatment.

INSTALLATION: Surface installation. Keyhole slots for easy installation. Mounting screws are not provided.

WARRANTY: 5 Year Warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory for Damp Location. This product was Made in America and complies with the Buy American Act requirements.

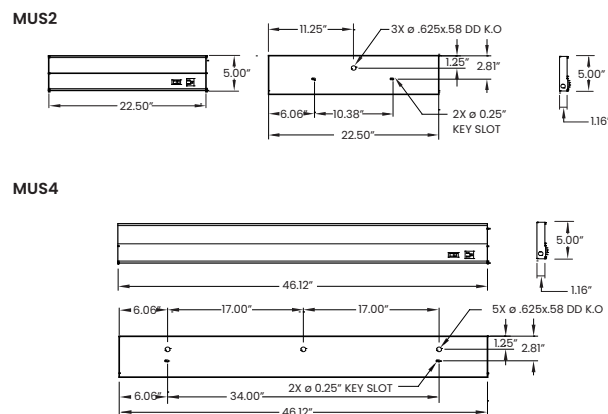

DIMENSIONAL DATA

PERFORMANCE DATA*

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (W)
MUS2	L1 = Standard	4000K	1250	100	12
MUS4	L1 = Standard	4000K	2500	100	25