

# NSELCR CHICAGO-APPROVED RECESSED EXIT/STAIR EDGELIT SERIES

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_

## PRODUCT FEATURES

- Chicago-Approved recessed edgelit sign for stairwells, corridors, commercial settings, and more
- Ceiling or wall surface mount installation
- Red legend, optional single or double face
- Fixture is certified to UL standards for Damp Locations (0°C - 50°C)
- This product is Assembled in America and complies with Buy American Act requirements



NSELCR Series

## ORDERING INFORMATION

Example: NSELCR-SF-RW-AL-NA



NSELCR		RW		
<b>Series</b>	<b>Face</b> SF = Single Face DF = Double Face	<b>Lettering</b> RW = Red Letters	<b>Housing</b> AL = Aluminum WH = White	<b>Battery</b> (blank) = AC Only EM-CW = Emergency Battery

<p><b>Directional Arrows</b>  <b>NA</b> = Exit No Arrow  <b>SNA</b> = Stair No Arrow  <b>DA</b> = Exit Double Arrow  <b>SDA</b> = Stair Double Arrow  <b>RA</b> = Exit Right Arrow*  <b>SRA</b> = Stair Right Arrow*  <b>LA</b> = Stair Left Arrow*  <b>SLA</b> = Stair Left Arrow*  <b>LARA</b> = Exit Left/Right Arrow**  <b>SLARA</b> = Stair Left/Right Arrow**</p> <p>*Available in single face configuration only  **Available in double face configuration only</p>	<p><b>Options</b>  <b>WM</b> = Wall Mount*</p> <p>*Available in single face configuration only</p>
--	--



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

# NSELCR CHICAGO-APPROVED RECESSED EXIT/STAIR EDGELIT SERIES



## SPECIFICATIONS

**HOUSING:** Premium-grade, extruded aluminum housing. Extruded aluminum trim assembly is easily detachable, providing accessibility for service or maintenance. Also available in optional white finish.

**LENS:** UV-stabilized silk screened acrylic edgelit panel provides consistent, uniform illumination.

**ELECTRICAL:** Dual 120/277 voltage, 50/60Hz standard. Energy-efficient, long life Red LEDs. Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing. 4.8V long life, maintenance-free rechargeable NiCd battery (EM models only). Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.


**FASTENERS:** Stainless steel Philips fasteners.

**INSTALLATION:** Compatible with drywall or drop-thru ceiling mount installations. Wall mount capability optional.


**WARRANTY:** Five (5) year warranty on all electronics and housing. Battery prorated for five years.

**LABEL:** Fixture UL Listed for Damp Locations (0°C - 50°C). This product meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes. Meets city of Chicago requirements. Certified to CEC under Title 20 Regulations. This product is Assembled in America and complies with the Buy American Act (BAA).

## DIMENSIONAL DATA

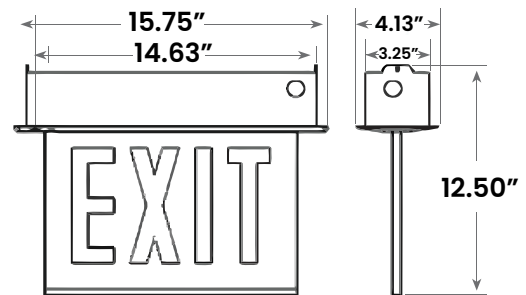

## Wall Mount Dimensions

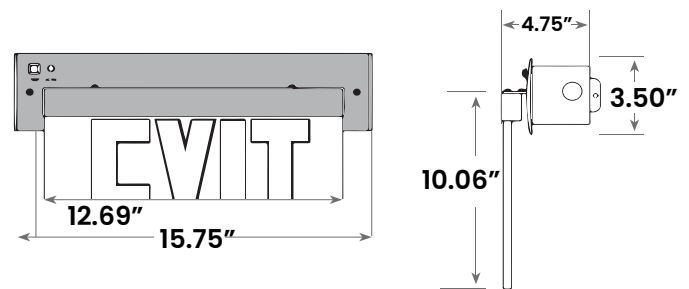

**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.