

COMPLETECARE™ LUMANIQUE

MULTI-FUNCTION SERIES (2x2 & 2x4)



PROJECT: _____
 TYPE: _____
 PRODUCT: _____
 APPROVED BY: _____

PRODUCT FEATURES

- Intended for Patient Rooms, Skilled Nursing Facilities, Convalescent Care, Hospice and more
- Provides ambient, exam, reading, and night light illumination for the patient room environment
- 4" Depth minimizes interference with systems within ceiling plenum
- Optional inset doorframe (IAS16) with clear overlay lens provides flat wipe-down surface for easy cleaning, Optional IP65 certified per IEC60598 and NSF2 Splash Zone/Non-Food Zone listed, CCEA approved
- Dimensional one-piece lens provides an architectural statement
- This product is Made in America and complies with Buy American Act requirements



SPDH

ORDERING INFORMATION

Example: SPDHR22-HC20/IC20-CA12-WHA-AERN-LW-30-40-35-NN-12



| SPDH | | | | | | |
|---------------|--|-------------------------------------|--|--|---|------------------------------------|
| Series | Mounting R = Recessed (Grid/Flange) | Size 22 = 2x2 24 = 2x4 | Housing HC20 = 20Ga. CRS Painted HA16 = 16Ga. Alum. Painted | Inset Frame IC20 = 20Ga. CRS Painted IA16 = 16Ga. Alum. Painted IAS16 = 16Ga. Sealed Alum. Painted* *IAS16 is sealed with IP65 listing. Door secured with screws and a lanyard. | Frame Lens* Blank = No Overlay Lens CA12 = .125 Clear Acrylic CP12 = .125 Clear Polycarbonate CP060 = .060 Clear Polycarbonate *Clear high reflective overlay provides flat wipe-down surface for easy cleaning (recommended for medical applications). | Lens WHA = White Acrylic |

| Functions* AERN = Ambient, Exam, Reading, Night Light AER = Ambient, Exam, Reading AE = Ambient, Exam AR = Ambient, Reading *Additional configurations available. | Lumen Output* LW = Low HG = High CL = Custom Lumen Output** *Subject to change. **Consult factory. Must be specified at time of quote. Must not exceed fixture maximum output. | Ambient*/Exam*/Reading/Nightlight** Color Temp. NE = No Exam NR = No Reading NN = No Nightlight 30 = 3000K 35 = 3500K 40 = 4000K 50 = 5000K LNA = Amber Night Light TW1 = Tunable White 2700K to 5000K*** *Ambient illuminates all compartments. Recommended to have same/similar color temp. as Exam. **Night Light non-dimming unless specified ***If Tunable White is selected, CCT applies to both Ambient and Exam functions. | Voltage 12 = 120V 27 = 277V | Options TW(#) = Tunable White Drivers* FZ1 = Fuse (120V) FZ2 = Fuse (277V) EQ = Earthquake Clips LV3 = Dimming Low Voltage Controller SD2 = Step Dim. Module (50-100%)** SD3 = Step Dim. Module (30-70-100%)** TH = Torx® Head Screws* IP65 = Optional IP65 Rating*** *See Page 2 to specify system. **Click her for specification. LV3 controls ambient and reading functions with dimming. Exam and Night Light are on separate line voltage circuits. *Self tapping screw through latch ***Only available with IAS16. Doorframe secured with screws and a lanyard. |
|---|--|---|--|---|



New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
 (773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

COMPLETECARE™ LUMANIQUE

MULTI-FUNCTION SERIES (2x2 & 2x4)



SPECIFICATIONS

CONSTRUCTION: 20-Gauge formed cold rolled steel housing and frame with continuous seam welds. Optional 16-gauge aluminum inset doorframe, sealed with closed-cell silicone gaskets and roomside fasteners, firmly anchored to the housing with durable aircraft cable. Internal chambers separate functions for individual light control without light leaks.

LENS: High transmittance matte white acrylic lens for maximum diffusion. Optional clear overlay lens provides flat wipe-down surface for easy cleaning (recommended for medical applications).

LED: Provides ambient, exam, reading and night light illumination for the patient room environment. Available in four color temperatures 3000K, 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Ambient section illuminates all compartments. Exam light levels work in conjunction with ambient function. Ambient and exam functions are recommended to have the same color temperature. 90 CRI standard.

DRIVER: 120-277VAC, 50-60HZ. Each function is independently circuited for individual control. 0-10V Dimming with 1-100% range. Tunable White selection for both Ambient and Exam functions. Driver options:

DALI8 - Dali Type* (one DALI address)

TWD - Constant current, two channel 0-10V dimming with dim-to-dark capabilities; one channel for brightness, one channel for CCT.

Optional Curbell Low Voltage Controller provides control of lighting from a pillow speaker, bed side rail or wall switch. LV3 controls ambient and reading functions with dimming. Exam and night light functions are provided on independent line voltage circuits unless otherwise specified. Controls and additional accessories by others.

FASTENERS: Stainless steel Philips flat head screws with captive cage nuts. Finish to match trim.

FINISH: White antimicrobial powder coat finish following multistage iron phosphate pretreatment on all exposed roomside painted surfaces.

INSTALLATION: Recessed mounting accommodates Grid and Flange installations. Recessed fixtures will be supplied with adjustable swing arms that can be used for Flange applications or taped to the side for Grid applications. Recessed install compatible with 1-1/2" and 15/16" Grid systems. Mounting for custom ceilings available, consult factory.

WARRANTY: Five (5) year warranty period.


LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory for Non-IC installations. Optional IP65 Rating per IEC60598. NSF2 Splash/Non-Food Zone listed when IAS16 inset doorframe is specified. CCEA approved.

DIMENSIONAL DATA

Dimensions are subject to change without notice. Intended for non-IC installations. Thermal protector included and extends 2 inches from housing. Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information.

Average weight of the SPD 2x2 is 30lbs. SPD 2x4 is 50lbs.

SPDH 2x2 recommended ceiling cut-out: 22.88" x 22.88"
SPDH 2x4 recommended ceiling cut-out: 22.88" x 46.88"

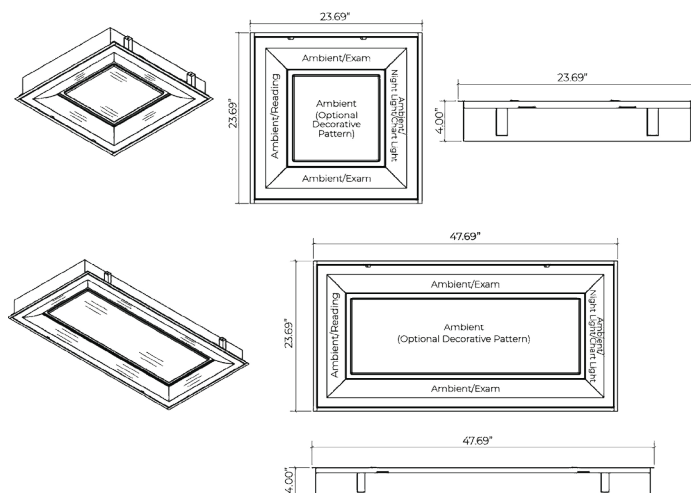

New Star Lighting

2225 W Pershing Rd, Chicago, IL 60609
(773) 847-1400
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2025, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

COMPLETECARE™ LUMANIQUE

MULTI-FUNCTION SERIES (2x2 & 2x4)



PERFORMANCE DATA*

*LEDs are frequently updated therefore values may change without notice.

Displayed information is with 80 CRI at 4000K with a white acrylic lens. LEDs are frequently updated therefore values may change without notice. Consult factory for additional reading light levels. Note, ambient function illuminates all compartments including center section. Exam function to be used in conjunction with ambient function.

| SERIES | OUTPUT | FUNCTION | LUMENS DELIVERED | EFFICACY (lm/W) | INPUT POWER (W) |
|--------|-----------|-------------|------------------|-----------------|-----------------|
| SPD22 | LW = Low | Ambient | 4400 | 110 | 40 |
| | | Exam | 8000 | 100 | 80 |
| | | Reading | 900 | 75 | 12 |
| | | Night Light | 750 | 75 | 10 |
| | HG = High | Ambient | 6600 | 110 | 60 |
| | | Exam | 10800 | 100 | 108 |
| | | Reading | 900 | 75 | 12 |
| | | Night Light | 750 | 75 | 10 |
| SPD24 | LW = Low | Ambient | 6900 | 115 | 60 |
| | | Exam | 12000 | 100 | 120 |
| | | Reading | 1875 | 75 | 25 |
| | | Night Light | 600 | 75 | 8 |
| | HG = High | Ambient | 13800 | 115 | 120 |
| | | Exam | 21500 | 100 | 215 |
| | | Reading | 1875 | 75 | 25 |
| | | Night Light | 1125 | 75 | 15 |

CCT Multipliers - 80 CRI

Multipliers for relative lumen values with other series color temperatures

| 3000K | 3500K | 4000K | 5000K |
|-------|-------|-------|-------|
| 0.96 | 0.99 | 1.00 | 1.00 |