

VARA KAMIN'S IMPRESSIONS OF LIGHT®, INC. MRI STARTILES

AGG14/AGG22/AGG24

Transform New Star Lighting's versatile StarTile with a VKI Image. Vara Kamin Images (VKI) create memorable experiences. Rich in color, movement and texture, Kamin's paintings provide a positive point of focus while stimulating active imagination and inviting the viewer to a place of self-reflection. Images sit directly in a standard Grid while the recessed frame and StarTile backlight the Image for an even illumination. VKI Images can be configured as a standalone image or into a mural. Oval or circle configurations available, consult factory.



SPECIFICATION FEATURES

IMAGES: Images are from Vara Kamin's Impressions of Light®, Inc. (VKI). Images sit directly in the grid with the Recessed Frame on top. Image options are on page 3 and are printed on 1/4" polycarbonate. Additional options available, consult factory. Images sit directly in the grid with the Recessed Frame on top. VKI murals are available and scalable to various project requirements. Images may need to be edited based on configuration. Images are printed on polycarbonate, unless otherwise specified.

RECESSED FRAME: Straight edge Recessed Frame illuminates the Image by raising the StarTile 3-inches (standard) above standard (15/16") grid ceiling. Frame is available in aluminum (MRI compliant) with a white powder coat finish, unless otherwise specified.

STARTILE FRAME: Fixture Frame White Extruded Aluminum. Non-ferrous material content.

STARTILE LENS: Opal Polycarbonate lens standard.

STARTILE LED: Recommended color temperature for VKI Images is 4000°K. Standard 0-10V dimming driver with 10-100% range.

POWER SUPPLY: LED driver included - must be remote mount. Must order Power Supply separately, Page 3. MRI room EMI filter required, supplied by others.

AGG14: Input Power 40.0W
AGG22: Input Power 40W
AGG24: Input Power 80W

ORDERING INFORMATION

Order based on number of murals, not individual StarTiles. Example: 8 StarTiles for 1 Mural, order Qty 1 with configuration = 8, Y, Z. See example on page 2. Oval and circle configurations available, consult factory.

APPLICATIONS: MRI Rooms.

MOUNTING: Grid installation. Mounting for custom ceilings available, consult factory.

LABEL: Fixture is listed for UL Damp Location.



SERIES	MOUNTING	SIZE	MRI	M	CONFIGURATION
AG	G				

G = Grid

14 = 1x4

*Remote Driver. Requires remote Power Supply ordered separately and proper filter components, by others. Consult factory for more information.

X Y Z

*Contact factory for custom installations

22 = 2x2

X = Number of StarTiles per Mural

24 = 2x4

Y = Number of StarTiles (Length)

Z = Number of StarTiles (Width)

*Nominal Size. Dimensional Data on Page 2

* Configuration Example on Page 2. Custom configurations and shapes available, consult factory. Images may need to be edited based on layout.

IMAGE*	VOLTAGE	COLOR TEMP.	OPTIONS
		40	

VMD = Moon Drops©

12 = 120V

40 = 4000°K

EQ = Earthquake Clips

VBL = Bridge of Light©

27 = 270V

EL1 = Emerg. Batt Low (Remote)

VSP = Sacred Passages - Balance©

UN = Universal

DM1 = 0-10V dimming with 1-100% range

VIM = Infinite Moments©

(120V-277V)

VSG = Sea Garden©

VTP = Touching Petals©

* Image options on Page 3



Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting

VARA KAMIN'S IMPRESSIONS OF LIGHT[®], INC. MRI STARTILES

AGG14/AGG22/AGG24

DIMENSIONAL DATA

Dimensions based on standard Grid (15/16"). Must have 4.5" ceiling clearance.

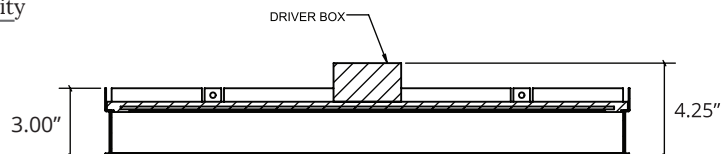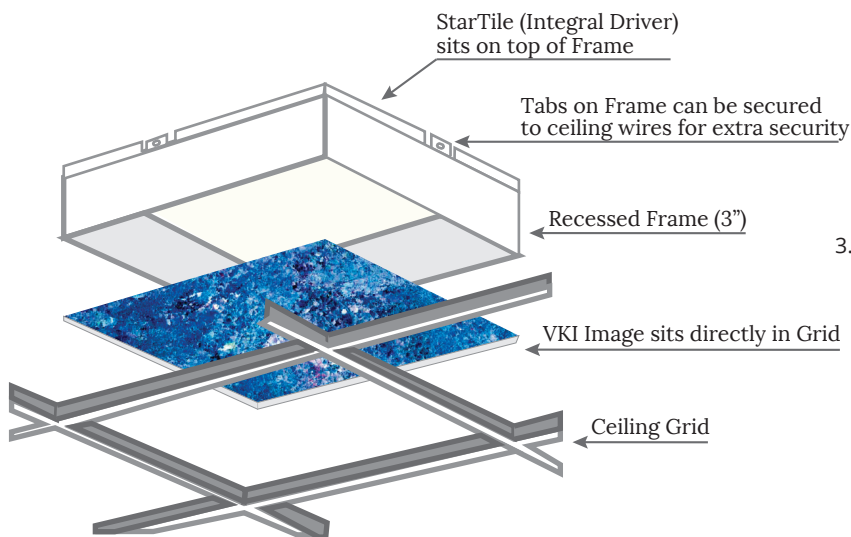

SERIES	IMAGE SIZE	FRAME SIZE	STARTILE SIZE (without Driver Box)	TOTAL HEIGHT
AGG14	11.75" x 47.75"	11.79" x 47.79" x 3.00"	11.81" x 47.75" x 0.56"	4.25"
AGG22	23.75" x 23.75"	23.79" x 23.79" x 3.00"	23.62" x 23.62" x 0.56"	4.25"
AGG24	23.75" x 47.75"	23.79" x 47.79" x 3.00"	23.62" x 47.62" x .056"	4.25"

CONFIGURATION EXAMPLE

Order quantity based on number of murals, not StarTiles.

Example, Qty 1: AGG22-MRI-M842-VBL-UN-57 = 1 Mural with 4 StarTiles across and 2 StarTiles Down for a total of 8 StarTiles.


CONFIGURATION
8 4 2

XYZ

X = Number of StarTiles per Mural = 8







Y = Number of StarTiles (Length) = 4

Z = Number of StarTiles (Width) = 2

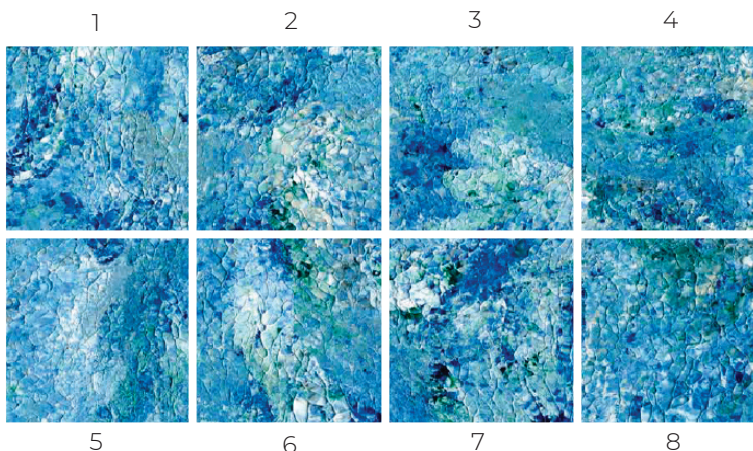

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting

IMAGE OPTIONS

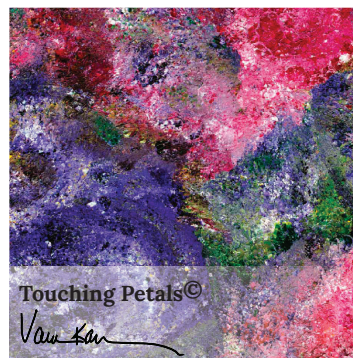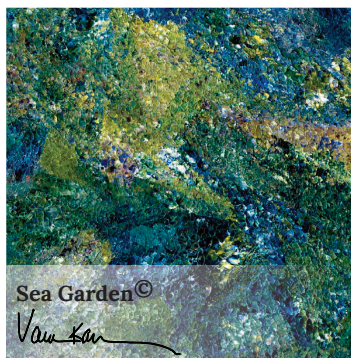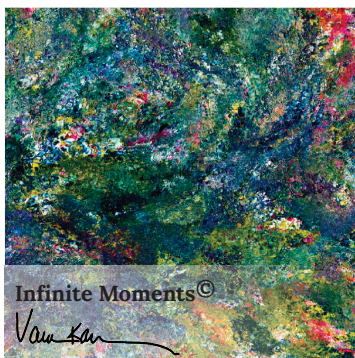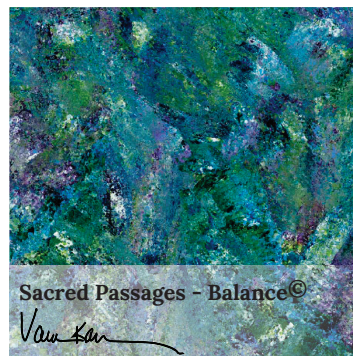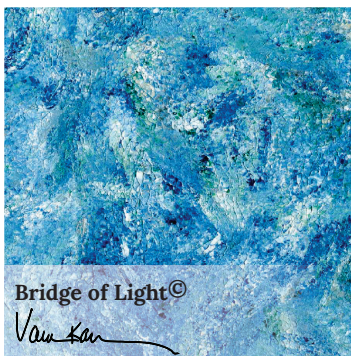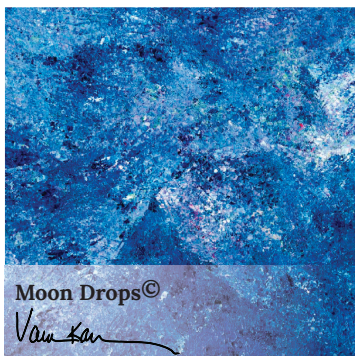

REMOTE POWER SUPPLY ORDERING INFORMATION

StarTile MRI fixtures supplied with LED Driver. Driver must be remote mount outside of MRI Room. One Driver inside one Box to power one fixture (maximum). Consult factory for additional options. MRI room EMI filter required (supplied by others). Note, each Power Supply requires individual Filter. Consult factory for additional Power Supply configurations.

SERIES	SIZE	PS-1/1-P	OPTIONS
AG	14 = 1x4 22 = 2x2 24 = 2x4		EL1 = Emerg. Batt LED Low (Remote) DM1 = 0-10V dimming with 1-100% range

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting