

## STARSURGICAL SERIES LED: RECESSED (GRID/FLANGE) SSR12/SSR14/SSR22/SSR24

### FEATURES:


- Intended for Surgical Suites, Operating Rooms, Examination Rooms, and more
- Surgical troffer available in a 1x2, 1x4, 2x2, 2x4
- Recessed ceiling mount; grid or flange
- This product was Made in America and complies with the Buy American Act (BAA) requirements

### RELATED PRODUCTS:

- [StarSurgical Recessed with Green LEDs \(SSR\)](#)
- [StarSurgical Surface Series \(SSS\)](#)
- [StarSurgical Surface with Green LEDs \(SSS\)](#)
- [StarMed Downlight Series \(DLM\)](#)



SSR24



### SPECIFICATIONS

**HOUSING:** 20 gauge formed cold rolled steel housing with continuous seam welds. Aluminum and stainless steel options available.

**FRAME:** Inset or overlapping doorframe available in aluminum, cold rolled steel, and stainless steel. Extruded inset door available in anodized aluminum or white painted aluminum. Frame held to housing via aircraft cable.

**LENS:** Available with symmetric or asymmetric acrylic lens with RFI Grid. Asymmetric lens serves as inner lens with a .080 white frosted acrylic outer lens for a smooth surface. Optional prismatic acrylic or polycarbonate installed with smooth side out and does not require additional outer lens. Inset and Overlapping frames use a rail hold down system.

**LED:** Available in three color temperatures 3500K, 4000K, and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 80 CRI standard with optional minimum 90 CRI available.

**ELECTRICAL:** 0-10V dimming available with 10-100% range and 1-100% range. Must specify dimming under options.

**FASTENERS:** Stainless steel Philips flat head screws with captive cage nuts. Finish to match doorframe.

**FINISH:** White antimicrobial powder coat finish following multistage iron phosphate pretreatment. Stainless steel brushed fixtures are brushed on all exposed room-side surfaces.

**GASKET:** Closed cell EPDM and closed cell silicone gaskets prevent air contaminations from entering the fixture. Gasketing seals lens to doorframe and doorframe to housing. Optional triple gasketing, must specify Grid or Flange installation.

**INSTALLATION:** Recessed mounting accommodates Grid and Flange installations. Recessed fixtures will be supplied with adjustable swing arms that can be used for Flange applications or taped to the side for Grid applications. Recessed install compatible with 1-1/2" and 15/16" Grid systems. Mounting for custom ceilings available, consult factory.

**WARRANTY:** Limited five (5) year warranty.

**LABEL:** Fixture is certified to UL standards for Wet Location under covered ceiling. IP65 rating. Meets ISO 3/Class 1 Cleanrooms. NSF2 Splash/Non-Food Zone. \*Suitable for Biosafety Labs rated BSL 1 to 4 when specifying optional NSF Protocol P442 rating.

This product was Made in America and complies with the Buy American Act (BAA) requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

# STARSURGICAL SERIES LED: RECESSED (GRID/FLANGE)

SSR12/SSR14/SSR22/SSR24

## ORDERING INFORMATION

EXAMPLE: SSR14-HC/OC-L4401C-A-UN

SERIES	MOUNTING	SIZE*	HOUSING	FRAME*	LUMEN OUTPUT*
SS	R				
	R = Recessed (Grid/Flange)	12 = 1x2 14 = 1x4 22 = 2x2 24 = 2x4	HC = 20Ga. CRS Painted HS = 20Ga. SS Brushed HP = 20Ga. SS Painted HA = 16Ga. Alum. Painted	INSET (I)* or OVERLAP (O) OC = 18Ga. CRS Painted OS = 18Ga. SS Brushed OP = 18Ga. SS Painted OA = 16Ga. Alum Painted IC = 20Ga. CRS Painted* IA = 16Ga. Alum Painted* IB = 20Ga. SS Brushed* IS = 20Ga. SS Painted*	SSR12-14: L2 = Low L3 = Standard L4 = High CL = Custom Lumen Output**  SSR22-24: L2 = Low L4 = Standard L6 = Medium L8 = High CL = Custom Lumen Output**
		*Nominal Size. Dimensional Data on Page 4.		*Inset frames (I) suitable for Biosafety Labs rated BSL 1-2 only.	

\*Subject to change. Performance Data on page 3.  
 \*\*Must be specified at time of quote. Must not exceed fixture maximum output.

COLOR TEMP.	CIRCUITS	LENS	VOLTAGE	OPTIONS
35 = 3500K	1C = 1 Circuit	A = .125 Prismatic Acrylic	12 = 120V	DM = 0-10V dimming with 10-100% range
40 = 4000K	2C = 2 Circuits*	E = .125 White Frosted Poly.	27 = 277V	DM1 = 0-10V dimming with 1-100% range
50 = 5000K		H = .125 White Frosted Acrylic	34 = 347V	FZ1 = Fuse (120V)
	*Allows for Inboard/Outboard control.	R = .125 Symmetric Prismatic Acrylic with RFI Grid	UN = Universal (120V-277V)	FZ2 = Fuse (277V)
		S = .125 Asymmetric Acrylic with RFI Grid and .080 White Frost Acrylic diffuser		SD2 = Step Dim. Module (50-100%) SD3 = Step Dim. Module (30-70-100%) EL1 = Emerg. Bat. LED Low (10W)* EL2 = Emerg. Bat. LED High (20W)* TH = Torx Head screws (with center pin) RM = Row Mount (N/A with P442 option)** 90C = 90 CRI TGG = Triple Gasketing (Grid) (N/A with P442 option) TGF = Triple Gasketing (Flange) (N/A with P442 option) IP66 = IP66 Rated (Overlapping frame only) RFI = (RIF) Radio Interference Filter (120V) RF2 = (RIF) Radio Interference Filter (277) MS = MIL-STD-461F (Must specify R or S Lens)*** P442 = NSF P442 Certified (Required for BSL 1-4)****

\*SSR12 Remote Battery. Consult factory for CEC Compliance. If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity.  
 \*\*Joiner bracket supplied. Fixture dimensions subject to change. Consult factory for custom wiring or knockouts.  
 \*\*\*N/A with UN voltage, must specify voltage.  
 \*\*\*\*Requires additional backbox, see dimensional data for details.

# STARSURGICALSERIES LED: RECESSED

SSR12/SSR14/SSR22/SSR24



## PERFORMANCE DATA\*

\*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
SS12	L2 = Low	3500°K	2875	115	25
		4000°K	3000	120	25
		5000°K	3125	125	25
	L3 = Standard	3500°K	4180	110	38
		4000°K	4370	115	38
		5000°K	4560	120	38
	L4 = High	3500°K	5500	110	50
		4000°K	5750	115	50
		5000°K	6000	120	50
SS14	L2 = Low	3500°K	5750	115	50
		4000°K	6000	120	50
		5000°K	6250	125	50
	L3 = Standard	3500°K	8250	110	75
		4000°K	8625	115	75
		5000°K	9000	120	75
	L4 = High	3500°K	11000	110	100
		4000°K	11500	115	100
		5000°K	12000	120	100
SS22	L2 = Low	3500°K	3000	120	25
		4000°K	3125	125	25
		5000°K	3250	130	25
	L4 = Standard	3500°K	6000	120	50
		4000°K	6250	125	50
		5000°K	6500	130	50
	L6 = Medium	3500°K	8625	115	75
		4000°K	9000	120	75
		5000°K	9375	125	75
	L8 = High	3500°K	11500	115	100
		4000°K	12000	120	100
		5000°K	12500	125	100
SS24	L2 = Low	3500°K	6000	120	50
		4000°K	6250	125	50
		5000°K	6500	130	50
	L4 = Standard	3500°K	12000	120	100
		4000°K	12500	125	100
		5000°K	13000	130	100
	L6 = Medium	3500°K	17250	115	150
		4000°K	18000	120	150
		5000°K	18750	125	150
	L8 = High	3500°K	23000	115	200
		4000°K	24000	120	200
		5000°K	25000	125	200


# STARSURGICAL SERIES LED: RECESSED

SSR12/SSR14/SSR22/SSR24





## DIMENSIONAL DATA


Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information. Average weight of the SSR14 is 27lb. Average weight of the SSR24 is 48lb.

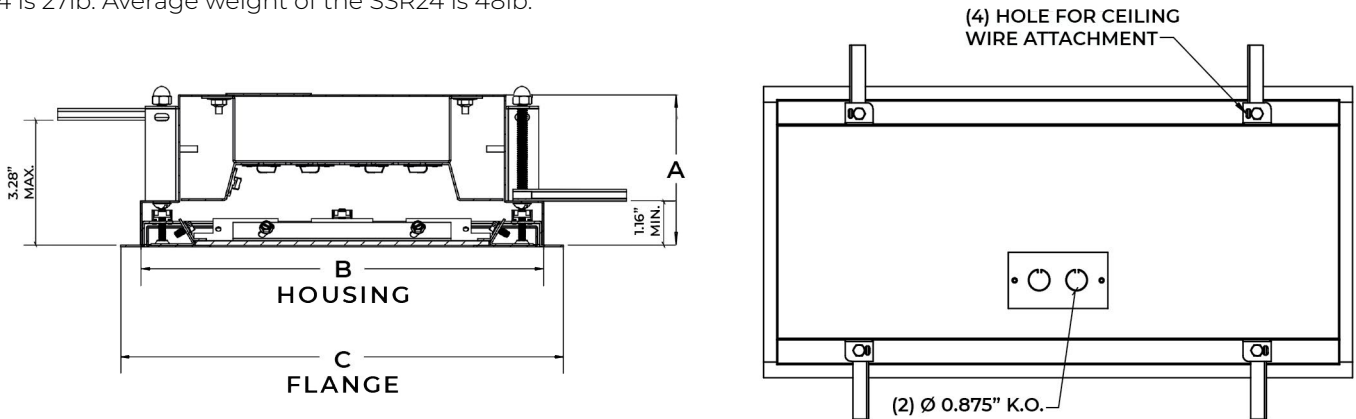

	A	B	C	REC. CEILING CUT-OUT
SSR12	4.00"	10.64" X 22.64"	11.69" X 23.69"	10.88" X 22.88"
SSR14	4.00"	10.64" X 46.64"	11.69" X 47.69"	10.88" X 46.88"
SSR22	4.00"	22.64" X 22.64"	23.69" X 23.69"	22.88" X 22.88"
SSR24	4.00"	22.64" X 46.64"	23.69" X 47.69"	22.88" X 46.88"

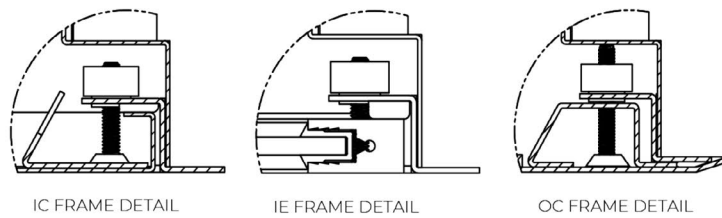


SSR (W/ OC FRAME) RECESSED GRID




SSR (W/ OC FRAME) RECESSED FLANGE

### GRID COMPATIBILITY:

- SSR12: Spaced at 12" x 24" Centers
- SSR14: Spaced at 12" x 48" Centers
- SSR22: Spaced at 24" x 24" Centers
- SSR24: Spaced at 24" x 48" Centers

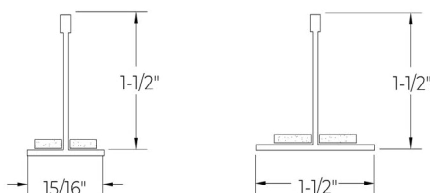

### SSR with P442 Backbox:

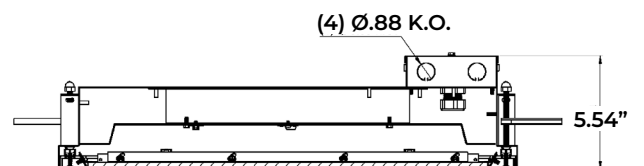

This product was Made in America and complies with the Buy American Act (BAA) requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.