

VICTORY NARROW FLUORESCENT

VIC2N/VIC3N/VIC4N

SPECIFICATION FEATURES

HOUSING: Marine grade extruded aluminum frame with cast aluminum end caps. Includes knockouts for surface conduit and tandem mounting.

LENS: Linear ribbed clear and white polycarbonate lens available in two thickness. Unique swing rail design for ease of lens removal for maintenance.

ELECTRONICS: Electronic Ballast <10% THD standard.

REFLECTOR: Faceted 22Ga. specular aluminum for maximum rigidity and controlled light distribution.

FASTENERS: Phillips flat head screws (3 screws on each side).

FINISH: White powder coat finish following multistage iron phosphate pre-treatment.

GASKET: EPDM gasketing to prevent water and dust infiltration.



APPLICATIONS: Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more.

MOUNTING: Surface Wall Mount Installation.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Example: VIC2N-2172C-RW-UN-WH

SERIES	SIZE	STYLE	# OF LAMPS	LAMP TYPE	CIRCUITS
VIC		N			
	2 = 2ft.	N = Narrow	1 = 1 Lamp	VIC2N:	1C = 1 Circuit
	3 = 3ft.		2 = 2 Lamp	14 = Lin. 14W T5	2C = 2 Circuits
	4 = 4ft.		3 = 3 Lamp*	17 = Lin. 17W T8	
			4 = 4 Lamp	24 = Lin. 24W T5 H.O	
	*Nominal Size.			VIC3N:	
	Dimensional		*Cannot be used	21 = Lin. 21W T5	
	Data on Page 2.		with Occ sensor.	25 = Lin. 25W T8	
				39 = Lin. 39W T5 H.O	
				VIC4N:	
				28 = Lin. 28W T5	
				32 = Lin. 32W T8	
				54 = Lin. 54W T5 H.O	

LENS	VOLTAGE	FINISH	OPTIONS
RW = .09 Ribbed White Poly. (Standard)	12 = 120V	WH = White	PC = Photocell (Flat End Cap Only)
RC = .09 Ribbed Clear Poly. (Standard)	27 = 277V	CC = Custom Color	TM = Tandem Mount
RWC = .15 Ribbed White Poly.	34 = 347V		E1 = Emerg. Ballast (450lm)**
RCC = .15 Ribbed Clear Poly.	UN = Universal (120V-277V)		E2 = Emerg. Ballast (1350lm)**
			DB = Dimming Ballast (0-10V)*
			PR = Program Rapid Start
			CM = Corner Mount
			FZ1 = Fuse (120V)
			FZ2 = Fuse (277V)
			OC = Occupancy Sensor
			DE = Decorative End Caps
			TH = Torx Head Screws
			NAT = Natatorium Finish
			UST = Unistrut Mounting Plate
			PM = Pendant Mount (Stems and Hardware by others)

* Cannot use with UN voltage.

** Cannot use with UN voltage. Consult factory for T5 availability.


VICTORY NARROW FLUORESCENT

VIC2N/VIC3N/VIC4N



DIMENSIONAL DATA

Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information.
 Average weight of the VIC2N is 10lbs. Average weight of the VIC3N is 12lbs. Average weight of the VIC4N is 15lbs.

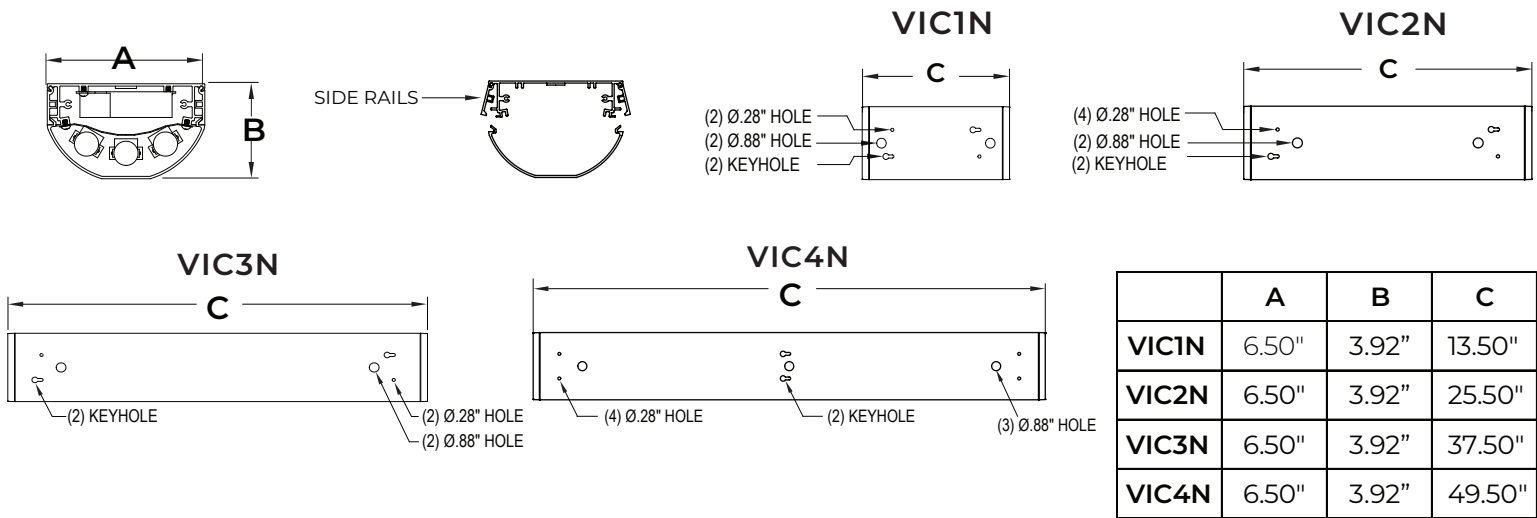

Notes:
 This product complies with the Buy American Act requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details please consult your New Star Lighting Representative.