

## VICTORY NARROW: QUICK SHIP

VIC2N/VIC4N

### FEATURES:

- Intended for Vandal Resistant applications when "TH" is specified, Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Architectural linear luminaire that melds aesthetics, function and vandal resistance
- Extruded aluminum housing with cast aluminum endcaps for durability
- This product complies with the Buy American Act requirements



VIC4N



U.S. Patent No. US Patent 8,770,785

### RELATED PRODUCTS:

- [Victory Narrow \(VICN\) Full Range of Ordering Options](#)
- [Victory Wide \(VICW\)](#)
- [Stairwell Tres Series \(STWL\)](#)

### SPECIFICATIONS

**CONSTRUCTION:** Marine grade extruded aluminum frame with cast aluminum end caps. Includes knockouts for surface conduit and tandem mounting (field installation, hardware by others).

**LENS:** White polycarbonate lens. Unique swing rail design for ease of lens removal for maintenance.

**LED:** Available in three color temperatures 3500°K, 4000°K and 5000°K with maximum 3-step MacAdam variation allowance. Minimum 80 CRI standard.

**ELECTRICAL:** 0-10V dimming available with 10-100% range and 1-100% range. Must specify dimming under options.

**REFLECTOR:** Faceted 22 gauge specular aluminum for maximum rigidity and controlled light distribution.

**FASTENERS:** Phillips flat head screws (3 screws on each side). Optional Torx Head screws for tamper resistance.

**FINISH:** White powder coat finish following multistage iron phosphate pretreatment.

**GASKET:** EPDM gasketing to prevent water and dust infiltration.

**INSTALLATION:** Surface wall mount installation. Hardware by others.

**WARRANTY:** [New Star Promise](#). Limited five (5) year warranty.

**LABEL:** Fixture is certified to UL standards by Intertek Testing Laboratories for Wet Location (under covered ceiling).

## VICTORY NARROW: QUICK SHIP

VIC2N/VIC4N

### ORDERING INFORMATION

EXAMPLE: VIC2N-L2351C-RW-UN-WH-QS

SERIES	SIZE*	STYLE	LUMEN OUTPUT*	COLOR TEMP.	CIRCUITS	LENS
<b>VIC</b>		<b>N</b>				<b>RW</b>
	2 = 2ft.	N = Narrow	L1 = Low	35 = 3500°K	1C = 1 Circuit	RW = .09 Ribbed White Poly.
	4 = 4ft.		L2 = Standard	40 = 4000°K	2C = 2 Circuits*	
			L3 = High	50 = 5000°K		
	*Nominal Size. Dimensional Data on Page 4.		*Subject to change. Performance Data on page 3.		*Allows for inboard/ outboard control.	

VOLTAGE	FINISH	OPTIONS	
	<b>WH</b>		<b>QS</b>
12 = 120V	WH = White	DM = 0-10V dimming with 10-100% range	QS = Quick Ship
27 = 277V		DM1 = 0-10V dimming with 1-100% range	
34 = 347V		SD2 = Step. Dimming Module (50-100%)	
UN = Universal (120V-277V)		SD3 = Step. Dimming Module (30-70-100%)	
		WP = 6ft. Flex Whip. Supply wires included only unless otherwise specified	
		TH = Torx Head Screws	
		PM = Pendant Mount Install (Stems/Hardware by others)	

This product complies with the Buy American Act requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

# VICTORY NARROW: QUICK SHIP

## VIC2N/VIC4N



### PERFORMANCE DATA\*

\*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
VIC2N	Low (L1)	3500°K	1100	85	13
		4000°K	1200	92	13
		5000°K	1300	100	13
	Standard (L2)	3500°K	2100	84	25
		4000°K	2300	92	25
		5000°K	2500	100	25
	High (L3)	3500°K	3200	84	38
		4000°K	3700	97	38
		5000°K	4000	105	38
VIC4N	Low (L1)	3500°K	2700	108	25
		4000°K	2800	112	25
		5000°K	2900	116	25
	Standard (L2)	3500°K	5400	108	50
		4000°K	5600	112	50
		5000°K	5800	116	50
	High (L3)	3500°K	7200	96	75
		4000°K	8100	108	75
		5000°K	8600	115	75

This product complies with the Buy American Act requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.


# VICTORY NARROW: QUICK SHIP

## VIC2N/VIC4N






### DIMENSIONAL DATA

Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information. Average weight of the VIC2N is 10lb. Average weight of the VIC4N is 15lb.

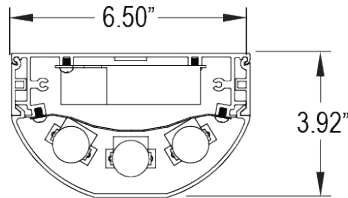

SIDE RAILS

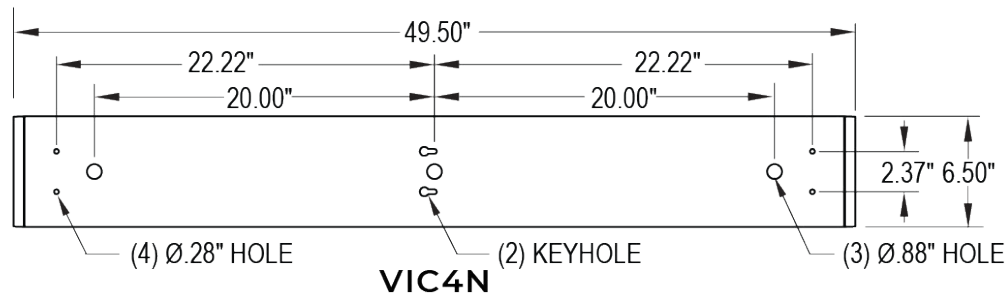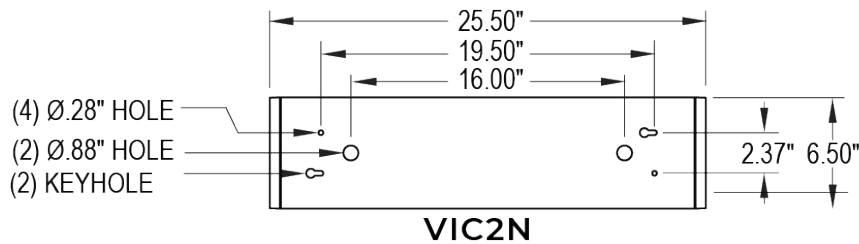

**STANDARD (FLAT) END CAP**

This product complies with the Buy American Act requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.