

VICTORY WIDE SERIES: QUICK SHIP

VIC2W/VIC4W

FEATURES:

- Intended for Vandal Resistant applications when "TH" is specified, Public Areas, Corridors, Stairways, Underpasses, Parking Garages, Restrooms, Lobbies, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options.
- Architectural linear luminaire that melds aesthetics, function and vandal resistance
- Extruded aluminum housing with cast aluminum endcaps for durability
- Wet Location (under covered ceiling) rating standard
- This product complies with the Buy American Act requirements

RELATED PRODUCTS:

- [Victory Wide \(VICW\) Full Range of Ordering Options](#)
- [Victory Narrow \(VICN\)](#)
- [Stairwell Tres Series \(STWL\)](#)

SPECIFICATIONS

CONSTRUCTION: Marine grade extruded aluminum frame with cast aluminum end caps. Includes knockouts for surface conduit and tandem mounting (field installation. Hardware by others).

LENS: White polycarbonate lens. Unique swing rail design for ease of lens removal for maintenance.

LED: Available in three color temperatures 3500°K, 4000°K and 5000°K with maximum 3-step MacAdam variation allowance. Minimum 80 CRI standard.

ELECTRICAL: 0-10V dimming available with 10-100% range and 1-100% range. Must specify dimming under options.

REFLECTOR: Faceted 22 gauge specular aluminum for maximum rigidity and controlled light distribution.

FASTENERS: Phillips flat head screws (3 screws on each side). Optional Torx Head screws for tamper resistance.

FINISH: White powder coat finish following multistage iron phosphate pretreatment.

GASKET: EPDM gasketing to prevent water and dust infiltration.

INSTALLATION: Surface wall mount installation. Hardware by others.

WARRANTY: [New Star Promise](#). Limited five (5) year warranty.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratories for Wet Location (under covered ceiling).



VIC4W



U.S. Patent No. US Patent 8,770,785

VICTORY WIDE SERIES: QUICK SHIP

VIC2W/VIC4W

ORDERING INFORMATION

EXAMPLE: VIC2W-L2351C-RW-UN-WH-QS

SERIES	SIZE*	STYLE	LUMEN OUTPUT*	COLOR TEMP.	CIRCUITS	LENS
VIC		W				RW
	2 = 2ft.	W = Wide	L1 = Low	35 = 3500°K	1C = 1 Circuit	RW = .09 Ribbed White Poly.
	4 = 4ft.		L2 = Standard	40 = 4000°K	2C = 2 Circuits*	
			L3 = Medium	50 = 5000°K		
			L4 = High			
	*Nominal Size. Dimensional Data on Page 4.		*Subject to change. Performance Data on page 3.		*Allows for inboard/ outboard control.	

VOLTAGE	FINISH	OPTIONS	
	WH		QS
12 = 120V	WH = White	DM = 0-10V dimming with 10-100% range	QS = Quick Ship
27 = 277V		DM1 = 0-10V dimming with 1-100% range	
34 = 347V		SD2 = Step. Dimming Module (50-100%)	
UN = Universal (120V-277V)		SD3 = Step. Dimming Module (30-70-100%)	
		WP = 6ft. Flex Whip. Supply wires included only unless otherwise specified	
		TH = Torx Head Screws	
		PM = Pendant Mount Install (Stems/Hardware by others)	

This product complies with the Buy American Act requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

VICTORY WIDE SERIES: QUICK SHIP

VIC2W/VIC4W



PERFORMANCE DATA*

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
VIC2W	Low (L1)	3500°K	1300	100	13
		4000°K	1350	104	13
		5000°K	1400	108	13
	Standard (L2)	3500°K	2500	100	25
		4000°K	2600	104	25
		5000°K	2700	108	25
	Medium (L3)	3500°K	3700	97	38
		4000°K	3900	103	38
		5000°K	4100	108	38
	High (L4)	3500°K	4900	98	50
		4000°K	5100	102	50
		5000°K	5300	106	50
VIC4W	Low (L1)	3500°K	2400	96	25
		4000°K	2550	102	25
		5000°K	2700	108	25
	Standard (L2)	3500°K	4900	98	50
		4000°K	5100	102	50
		5000°K	5300	106	50
	Medium (L3)	3500°K	7400	99	75
		4000°K	7700	103	75
		5000°K	8000	107	75
	High (L4)	3500°K	9700	97	100
		4000°K	10200	102	100
		5000°K	10700	107	100

This product complies with the Buy American Act requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.



VICTORY WIDE SERIES: QUICK SHIP

VIC2W/VIC4W




DIMENSIONAL DATA


Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information. Average weight of the VIC2W is 15lb. Average weight of the VIC4W is 20lb.

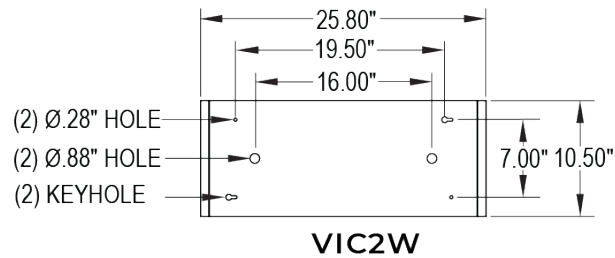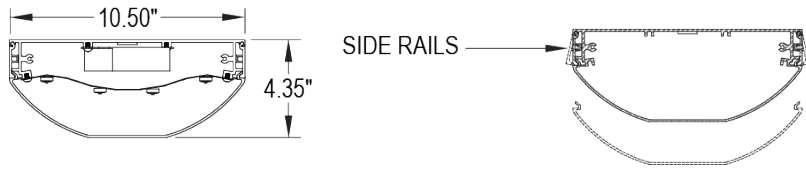

VIC2W

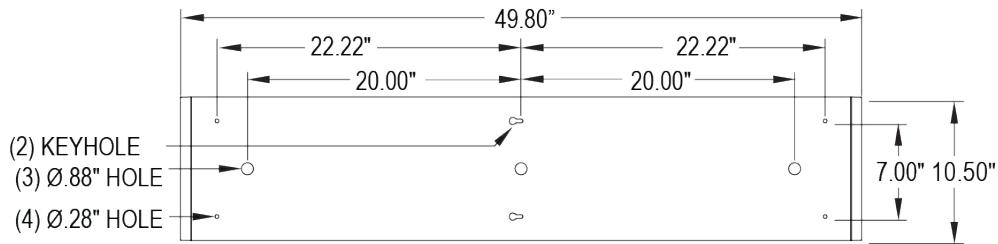

VIC4W



STANDARD (FLAT) END CAP

This product complies with the Buy American Act requirements. Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.