

HNL SERIES LED

HNLHH/HNLHL/HNLOF/HNLVH

SPECIFICATION FEATURES

FACEPLATE: Durable die cast aluminum material. Available with four different faceplates: Horizontal Hood, Horizontal Louver, Open Frame (can be installed vertically or horizontally), and Vertical Hood.

LED: Available in 3 white color temperatures 3000°K, 4000°K and 5000°K. Amber LED's available. Consult factory for additional LED colors.

ELECTRONICS: Integrated embedded driver (3W).

FINISH: White antimicrobial finish (standard). Custom color available, must specify standard vs antimicrobial finish.



APPLICATIONS: Healthcare, Patient Rooms, Surgical Suites, Commercial settings, Lobbies, Schools, and more.

MOUNTING: Surface (S) or Recessed (R) installation. Recessed m

LABEL: Fixture is certified to UL standards.



ORDERING INFORMATION

Example: HNL-HH-30-UN-OC-DM-AM

SERIES	FACEPLATE	LAMP TYPE	VOLTAGE	OPTIONS
HNL			UN	

HH = Horizontal Hood*
HL = Horizontal Louver
OF = Open Frame**
VH = Vertical Hood

30 = 3000°K
40 = 4000°K
50 = 5000°K
LA = Amber LED*

UN = Universal
(120V-277V)

NF = None
PC = Photocell*
OC = Occupancy Sensor*

* Only faceplate that can be used with Occ Sensor/Photocell. *Not available with OC
**Can be installed horizontally or vertically

*Can only be used with HH Faceplate.
PC & OC cannot be used together.
OC not available with Amber


DIMMING	FINISH

ND = None
DM = 0-10V dimming with 10-100% range

AM = Antimicrobial White
CC = Custom Color*

*Must specify finish (standard vs antimicrobial)

DIMENSIONAL DATA

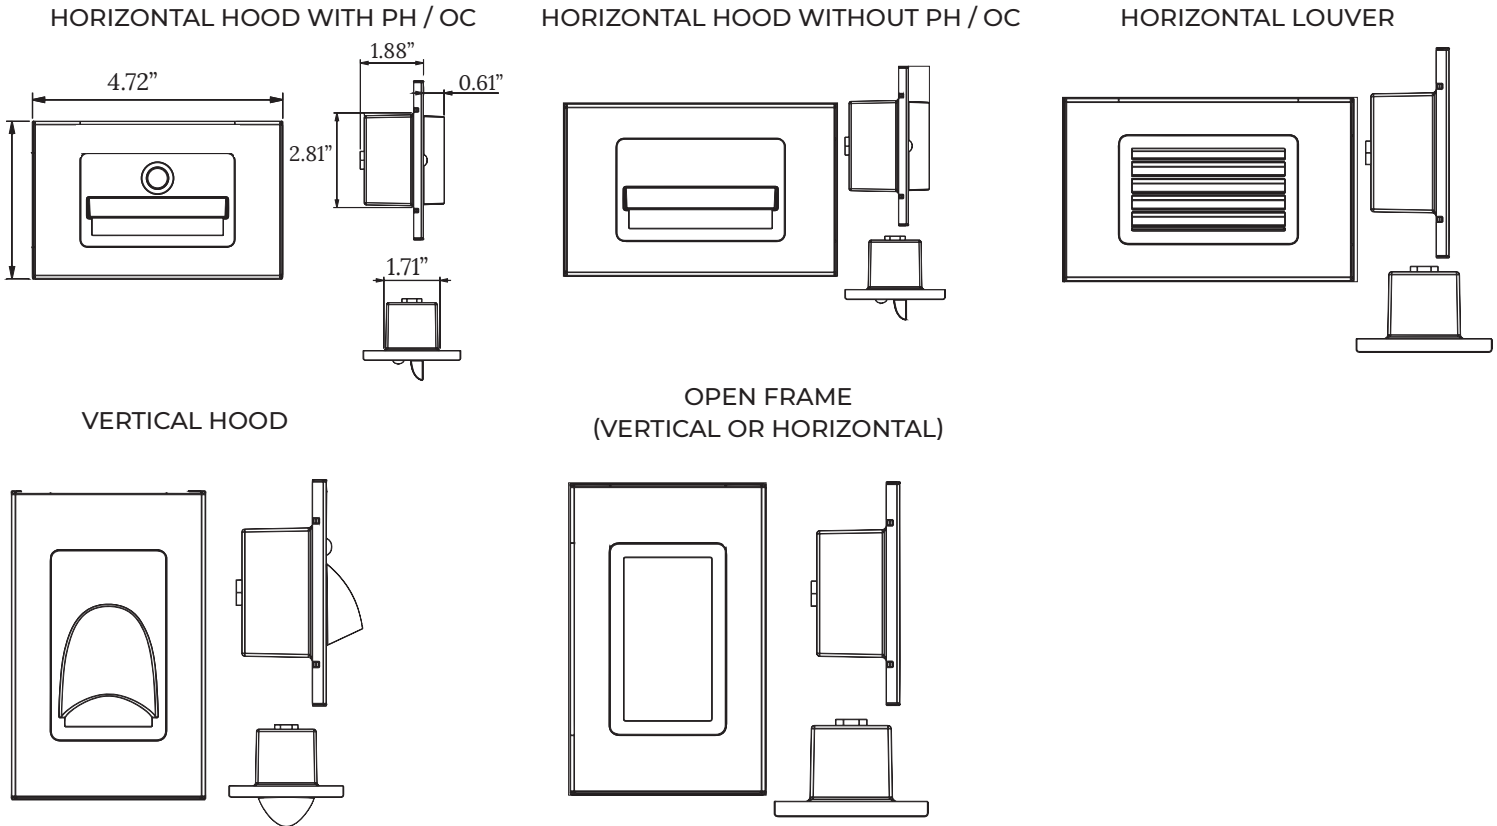

PERFORMANCE DATA*

MODEL	LAMP TYPE	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
HNL-OF	3000°K	250	66	3.8
	4000°K	240	63	3.8
	5000°K	253	67	3.8
	Amber LED	170	45	3.8
HNL-VH	3000°K	92	24	3.8
	4000°K	82	22	3.8
	5000°K	95	25	3.8
	Amber LED	61	16	3.8
HNL-HH	3000°K	130	34	3.8
	4000°K	120	32	3.8
	5000°K	133	35	3.8
	Amber LED	88	23	3.8
HNL-HL	3000°K	124	33	3.8
	4000°K	114	30	3.8
	5000°K	127	33	3.8
	Amber LED	85	22	3.8

Notes:
 *Subject to change without notice
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting