

PROJECT: _____

TYPE: _____

PRODUCT: _____

APPROVED BY: _____

PRODUCT FEATURES

- Intended for Surgical Suites, Operating Rooms, Examination Rooms, and more
- Surface mount surgical troffer available in a 1x2, 1x4, 2x2, 2x4 dimensions
- Available with symmetric or asymmetric acrylic lens with RFI Grid
- Suitable for Wet Locations, IP65 Rated per IEC60598, meets ISO 3/Class 1 Cleanroom Standards, NSF2 Splash/Non-Food Zone Listed, Suitable for Biosafety Labs rated BSL 1 to 4 when specifying optional NSF Protocol P442 rating
- This product is Made in America and complies with the Buy American Act (BAA)



SSS



ORDERING INFORMATION

Example: SSS-14-HC/OC-L4-40-1C-A-UN

SS	S				
Series	Mounting S = Surface	Nominal Size 12 = 1x2 14 = 1x4 22 = 2x2 24 = 2x4 *Nominal size. Dimensional data on Page 2.	Housing HC = 20Ga. CRS Painted HS = 20Ga. SS Brushed HP = 20Ga. SS Painted HA = 16Ga. Alum. Painted	Frame* INSET (I)* or OVERLAP (O) OC = 18Ga. CRS Painted OS = 18Ga. SS Brushed OP = 18Ga. SS Painted OA = 16Ga. Alum. Painted IC = 20Ga. CRS Painted* IA = 16Ga. Alum. Painted* IB = 20Ga. SS Brushed* IS = 20Ga. SS Painted* *Inset frames (I) suitable for Biosafety Labs (BSL) rated 1-2 only.	Lumen Output* SSS12-14: L2 = Low L3 = Standard L4 = High CL = Custom Lumen Output** SSS22-24: L2 = Low L4 = Standard L6 = Medium L8 = High CL = Custom Lumen Output** *Subject to change. Performance Data on page 3 & 4. ** Must be specified at time of quote. Must not exceed fixture maximum output.

Color Temp. 35 = 3500K 40 = 4000K 50 = 5000K	Circuits 1C = 1 Circuit 2C = 2 Circuits* *Allows for Inboard/ Outboard control.	Lens A = .125 Prismatic Acrylic E = .125 White Frosted Poly. H = .125 White Frosted Acrylic R = .125 Symmetric Prismatic Acrylic with RFI Grid S = .125 Asymmetric Acrylic with RFI Grid and .080 White Frost Acrylic diffuser	Voltage 12 = 120V 27 = 277V UN = Universal (120V-277V)	Options FZ1 = Fuse (120V) FZ2 = Fuse (277V) SD2 = Step Dim. Module (50-100%) SD3 = Step Dim. Module (30-70-100%) EL1 = Emerg. Batt. LED Low (10W)* EL2 = Emerg. Batt. LED High (20W)* RF1 = (RIF) Radio Interference Filter (120V) RF2 = (RIF) Radio Interference Filter (277V) TH = Torx® Head screws (with center pin) RM = Row Mount (N/A with P442 Option)** 90C = 90 CRI IP66 = IP66 Rated (Overlapping frame only) MS = MIL-STD-461F (Must specify R or S Lens)*** P442 = NSF P442 Certified (Required for BSL 1-4) *SSS12 Remote Battery. Consult factory for CEC Compliance. If stored, batteries should be fully recharged every six months and kept between 0°C-25°C to maintain optimal battery capacity. **Joiner bracket supplied. Fixture dimensions subject to change. Consult factory for custom wiring or knockouts. ***N/A with UN voltage, must specify voltage.
---	--	---	---	--

SPECIFICATIONS

HOUSING: 20-Gauge formed cold rolled steel housing with continuous seam welds. Aluminum and stainless steel options available.

DOORFRAME: Inset or overlapping doorframe available in aluminum, cold rolled steel, and stainless steel. Extruded inset door available in anodized aluminum or white painted aluminum. Frame secured to housing via aircraft cable.

LENS: Available with symmetric or asymmetric acrylic lens with RFI Grid. Asymmetric lens serves as inner lens with a .080 white frosted acrylic outer lens for a smooth surface. Optional prismatic acrylic or polycarbonate installed with smooth side out and does not require additional outer lens. Inset and Overlapping frames use a rail hold down system.

LED: Available in three color temperatures 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Other color temperatures available, consult factory. Minimum 50,000 hours with 70% lumen maintenance in a 25°C ambient temperature, compliant with IES LM-80 testing standards.

ELECTRICAL: 120-277VAC or 347VAC 50/60HZ electrical input high power factor electronic, constant current driver (<20% THD, >0.95 PF). Each function is independently circuited for individual control. Standard 0-10V dimming with 1-100% range. Step dimming options available.

FASTENERS: Stainless steel Philips flat head screws with captive cage nuts. Finish to match doorframe.

FINISH: White antimicrobial powder coat finish following multi-stage iron phosphate pretreatment. Stainless steel brushed fixtures are brushed on all exposed room-side surfaces.



GASKET: Closed cell EPDM and closed cell silicone gaskets prevent air contaminations from entering the fixture. Gasketing seals lens to doorframe and doorframe to housing. Optional triple gasketing, must specify Grid or Flange installation.

INSTALLATION: Surface installation. Hardware by others. Mounting for custom ceilings available, consult factory.

WARRANTY: 5 Year Warranty.

LABEL: Cetified IP65 per IEC60598. Meets ISO 3 (Fed Std. 209E/ Class 1) cleanroom rating. NSF2 Splash/Non-Food Zone. Suitable for Biosafety Labs rated BSL 1 to 4. BSL Levels 3 & 4 require specifying optional NSF Protocol P442 rating. This product was Made in America and complies with the Buy American Act (BAA) requirements.

DIMENSIONAL DATA

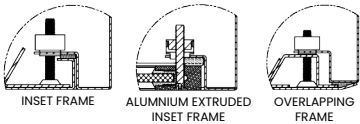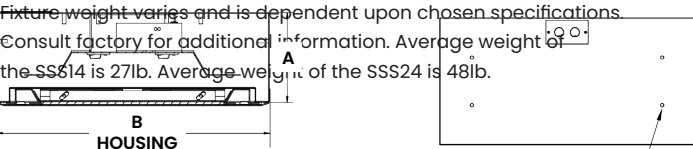

SSS12: (4) Ø.31" HOLE
SSS14: (6) Ø.31" HOLE
SSS22: (4) Ø.31" HOLE
SSS24: (6) Ø.31" HOLE

	A	B
SSS12	3.94"	12.00" x 24.07"
SSS14	3.94"	12.00" x 48.07"
SSS22	3.94"	24.00" x 24.07"
SSS24	3.94"	24.00" x 48.07"

PERFORMANCE DATA

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (W)
SSS12	L2 = LOW	3500K	2875	115	25
		4000K	3000	120	25
		5000K	3125	125	25
	L3 = STANDARD	3500K	4180	110	38
		4000K	4370	115	38
		5000K	4560	120	38
	L4 = HIGH	3500K	5500	110	50
		4000K	5750	115	50
		5000K	6000	120	50
SSS14	L2 = LOW	3500K	5750	115	50
		4000K	6000	120	50
		5000K	6250	125	50
	L3 = STANDARD	3500K	8250	110	75
		4000K	8625	115	75
		5000K	9000	120	75
	L4 = HIGH	3500K	11000	110	100
		4000K	11500	115	100
		5000K	12000	120	100
SSS22	L2 = LOW	3500K	3000	120	25
		4000K	3125	125	25
		5000K	3250	130	25
	L4 = STANDARD	3500K	6000	120	50
		4000K	6250	125	50
		5000K	6500	130	50
	L6 = MEDIUM	3500K	8625	115	75
		4000K	9000	120	75
		5000K	9375	125	75
	L8 = HIGH	3500K	11500	115	100
		4000K	12000	120	100
		5000K	12500	125	100



PERFORMANCE DATA CONTINUED

*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (W)
SSS24	L2 = LOW	3500K	6000	120	50
		4000K	6250	125	50
		5000K	6500	130	50
	L4 = STANDARD	3500K	12000	120	100
		4000K	12500	125	100
		5000K	13000	130	100
	L6 = MEDIUM	3500K	17250	115	150
		4000K	18000	120	150
		5000K	18750	125	150
	L8 = HIGH	3500K	23000	115	200
		4000K	24000	120	200
		5000K	25000	125	200