

# VICTORY NARROW SERIES: QUICK SHIP

PROJECT: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PRODUCT: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_



VICN

## PRODUCT FEATURES

- Intended for Public Areas, Corridors, Stairways, Parking Garages, Restrooms, Lobbies, Schools, and more
- 5 Day Quick Ship for orders under 50 fixtures. Consult factory for large quantities or additional fixture options
- Architectural linear luminaire that melds aesthetics, function and vandal resistance
- Extruded aluminum housing with cast aluminum endcaps for durability
- Fixture is certified to UL Standards by Intertek Testing Laboratory for Wet Locations, IK10 listed per IEC60068-2-75
- This product is Made in America and complies with the Buy American Act (BAA)

U.S. Patent No. US Patent 8,770,785



## ORDERING INFORMATION

Example: VIC2N-L2351C-RW-UN-WH

VIC		N				RW
<b>Series</b>	<b>Nominal Size</b> 2 = 2ft 4 = 4ft  *Nominal size. Dimensional data on Page 2.	<b>Style</b> N = Narrow	<b>Lumen Output*</b> L1 = Low L2 = Standard L3 = High  *Subject to change. Performance Data on Page 3.	<b>Color Temp.</b> 35 = 3500K 40 = 4000K 50 = 5000K	<b>Circuits</b> 1C = 1 Circuit 2C = 2 Circuits*  *Allows for inboard/outboard control	<b>Lens</b> RW = .09 Ribbed White Poly.

	WH		QS
<b>Voltage</b> 12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	<b>Finish</b> WH = White	<b>Options</b> SD2 = Step. Dimming Module (50-100%) SD3 = Step. Dimming Module (30-70-100%) WP = 6ft Flex Whip. Supply wires included only unless otherwise specified. PH = Phillips Head Screws PM = Pendant Mount Install	<b>QS = Quick Ship</b>



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
 www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2024, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

# VICTORY NARROW SERIES: QUICK SHIP

## SPECIFICATIONS

**CONSTRUCTION:** Marine grade, extruded aluminum frame with cast aluminum end caps. Includes knockouts for surface conduit and tandem mounting (field installation, hardware by others).

**LENS:** White polycarbonate lens. Unique swing rail design for ease of lens removal for maintenance.

**LED:** Available in three color temperatures 3500K, 4000K and 5000K with maximum 3-step MacAdam variation allowance. Minimum 80 CRI standard.

**ELECTRICAL:** 0-10V Dimming available with 1-100% and 10-100% range.

**REFLECTOR:** Faceted 22-gauge specular aluminum for maximum rigidity and controlled light distribution.

**FASTENERS:** Tamper-resistant Torx® head fasteners with center pin reject. Optional Phillips screws (3 on each side) available.

**FINISH:** White powder coat finish following multistage iron phosphate pretreatment.

**GASKET:** EPDM gasketing to prevent water and dust infiltration.


**INSTALLATION:** Surface wall mount installation. Hardware by others.

**WARRANTY:** New Star Promise.

**LABEL:** Fixture is certified to UL standards by Intertek Testing Laboratory for Wet Location (under covered ceiling). Optional 3G rating.

## DIMENSIONAL DATA

Fixture weight varies and is dependent upon chosen specifications. Consult factory for additional information. Average weight of the VIC2N is 10lb. Average weight of the VIC4N is 15lb.

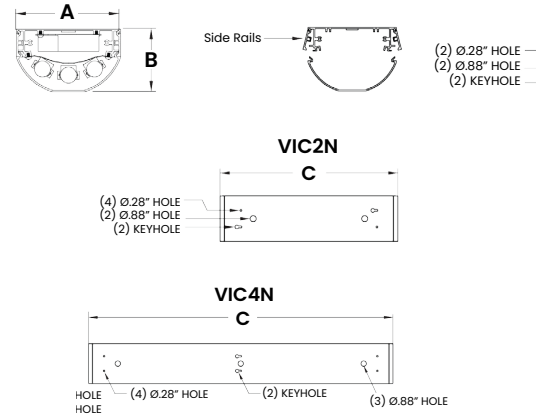

	A	B	C
VIC2N	6.50"	3.92"	25.50"
VIC4N	6.50"	3.92"	49.50"



**STANDARD (FLAT) END CAP**



The Victory Narrow QS Series is covered by our New Star Promise.

Our promise means we will repair or replace any of our High Abuse or Vandal Resistant architectural luminaires when installed according to our instructions for the life of the original installation if the fixture should fail due to physical abuse.\*

\*Exclusions to the New Star Promise are gunfire and chemical reactions



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
(773) 847-1400  
www.newstarlighting.com

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2024, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.

# VICTORY NARROW SERIES: QUICK SHIP

## PERFORMANCE DATA

\*Data is with 80 CRI chip. LEDs are frequently updated therefore values may change without notice.

MODEL	OUTPUT	COLOR TEMP.	LUMENS DELIVERED	EFFICACY (lm/w)	INPUT POWER (w)
VIC2N	LOW (L1)	3500K	1100	85	13
		4000K	1200	92	13
		5000K	1300	100	13
	STANDARD (L2)	3500K	2100	84	25
		4000K	2300	92	25
		5000K	2500	100	25
	HIGH (L3)	3500K	3200	84	38
		4000K	3700	97	38
		5000K	4000	105	38
VIC4N	LOW (L1)	3500K	2700	108	25
		4000K	2800	112	25
		5000K	2900	116	25
	STANDARD (L2)	3500K	5400	108	50
		4000K	5600	112	50
		5000K	5800	116	50
	HIGH (L3)	3500K	7200	96	75
		4000K	8100	108	75
		5000K	8600	115	75



**New Star Lighting**

2225 W Pershing Rd, Chicago, IL 60609  
 (773) 847-1400  
[www.newstarlighting.com](http://www.newstarlighting.com)

Specifications and dimensions are subject to change without notice. For additional options and dimensional details, please consult your New Star Lighting representative.

© 2024, New Star Lighting. All rights reserved. Unauthorized duplication or distribution is prohibited.