

STARMED M3 LED

M3U24/M3F24

SPECIFICATION FEATURES

HOUSING: 20 gauge formed cold rolled steel housing seam welded and ground smooth. Aluminum and stainless steel options available.

FRAME: Inset 18 gauge formed cold rolled steel or stainless steel door frame. Optional 16 gauge aluminum.

LENS: White frosted polycarbonate or acrylic shields high performing Exam compartment LEDs. Ambient compartment shielded by a white ribbed polycarbonate inner lens. Reading light standard. Clear lens over ambient and reading doorframe seals compartment for easy cleaning.

LED: Exam and ambient available in three color temperatures 3500°K, 4000°K, and 5000°K. Other color temperatures available, consult factory. 0-10V dimming available with 10-100% range and 1-100% range. Must specify dimming under options. Reading light is 3000K unless otherwise specified.

FASTENERS: Stainless steel Philips flat head screws with captive cage nuts. Finish to match housing.

FINISH: White antimicrobial powder coat finish following multistage iron phosphate pre-treatment.

GASKET: Closed cell EPDM and closed cell silicone gaskets prevent air contaminations from entering the fixture.



APPLICATIONS: Patient Rooms, Recovery Areas, Skilled Nursing, and more.

MOUNTING: Surface/Grid (U) or Flange installation. Flange fixtures supplied with swing arm system. Recessed install compatible with 1-1/2" and 15/16" Grid systems. Mounting for custom ceilings available, consult factory.

LABEL: Fixture is certified to UL standards by Intertek Testing Laboratory for damp locations.



ORDERING INFORMATION

Example: M3U24-HC/IC-L440-L335-4C-E/A-UN

SERIES	MOUNTING	SIZE*	HOUSING	INSET FRAME	EXAM LUMEN OUTPUT*	EXAM COLOR TEMP.	AMBIENT LUMEN OUTPUT*
M3		24					
	U = Surface/Grid F = Flange	24 = 2x4 *Nominal Size. Dimensional Data on Page 3.	HC = 20Ga. CRS Painted HS = 20Ga. SS Brushed HP = 20Ga. SS Painted HA = 16Ga. Alum. Painted	IC = 18Ga. CRS Painted IA = 16Ga. Alum Painted IB = 18Ga. SS Brushed IS = 18Ga. SS Painted	L4 = Low L6 = Medium L8 = High	35 = 3500°K 40 = 4000°K 50 = 5000°K	L1 = Low L2 = Standard L3 = High
					*Subject to change. Performance Data on page 3.		*Subject to change. Performance Data on page 3. Ambient Compartment diffused with a white ribbed poly. lens.

AMBIENT COLOR TEMP.	CIRCUITS	EXAM LENS	AMBIENT/READING OVERLAY*	VOLTAGE	OPTIONS
35 = 3500°K 40 = 4000°K 50 = 5000°K	1C = 1 Circuit 2C = 2 Circuits 3C = 3 Circuits 4C = 4 Circuits	E = .125 White Frosted Poly. F = .125 White Frosted Acrylic	A = .125 Clear Acrylic B = .125 Clear Poly. *Clear lens overlay for ambient and reading compartments to create surface for easy cleaning.	12 = 120V 27 = 277V 34 = 347V UN = Universal (120V-277V)	DM = 0-10V dimming with 10-100% range DM1 = 0-10V dimming with 1-100% range FZ1 = Fuse (120V) FZ2 = Fuse (277V) EL1 = Emerg. Bat. LED Low (10W) 90C = 90 CRI FY = Yoke Bracket (Replaces swing arm) RF = (RIF) Radio Intereference Filter TH = Torx Head screws (with center pin) LN = LED Night Light* LV2 = On/Off Curbell Low Voltage Controller** LV3 = Dimming Curbell Low Voltage Controller***

*3500°K non-dimming Night Light with integrated switch allows light levels at 100%, 70%, 40% and 10%.

**LV2 controls ambient and reading function without dimming (on/off function only). Exam and Night Light (if specified) are on separate line voltage circuits. Must specify voltage. N/A with emergency battery.

***LV3 controls ambient function with dimming and on/off reading function. Exam and Night Light (if specified) are on separate line voltage circuits. N/A with emergency battery.

Notes:
Specifications and Dimensions are subject to change without notice.
For additional options and dimensional details please consult your New Star Lighting Representative.

STARMED M3 LED

M3U24/M3F24




PERFORMANCE DATA*

MODEL	OUTPUT	COLOR TEMP	LUMENS DELIVERED	EFFICACY (lm/W)	INPUT POWER (W)
M3 Exam	Low	3500°K	6000	120	50
		4000°K	6250	125	50
		5000°K	6500	130	50
	Standard	3500°K	8625	115	75
		4000°K	9000	120	75
		5000°K	9375	125	75
	High	3500°K	11500	115	100
		4000°K	12000	120	100
		5000°K	12500	125	100
M3 Ambient	Low	4000°K	1200	100	12.5
	Standard	4000°K	2400	100	25
	High	4000°K	3600	100	37.5


*Note, M3 is out for updated photometry. Delivered lumens are subject to change

DIMENSIONAL DATA

M3U24

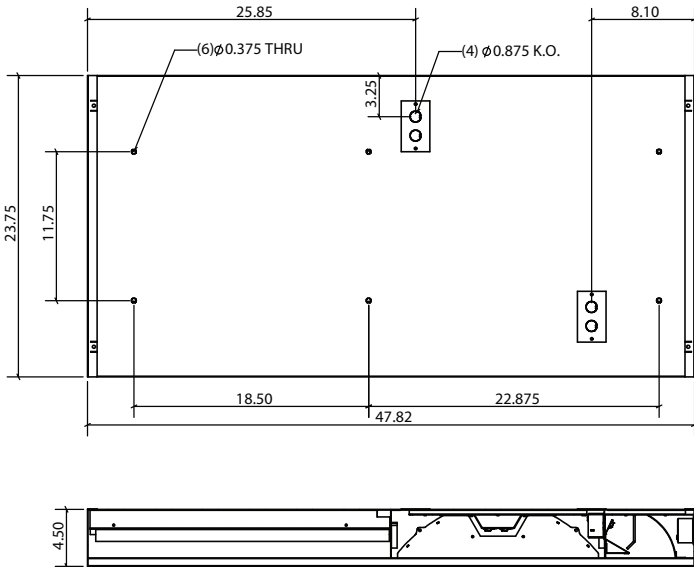

M3F24

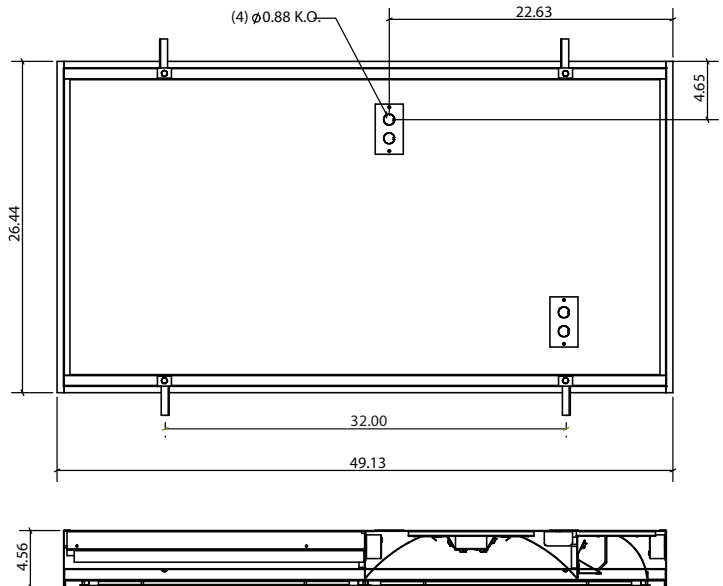

Notes:
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.